


Ovens



A new era  
of intelligent  
cooking

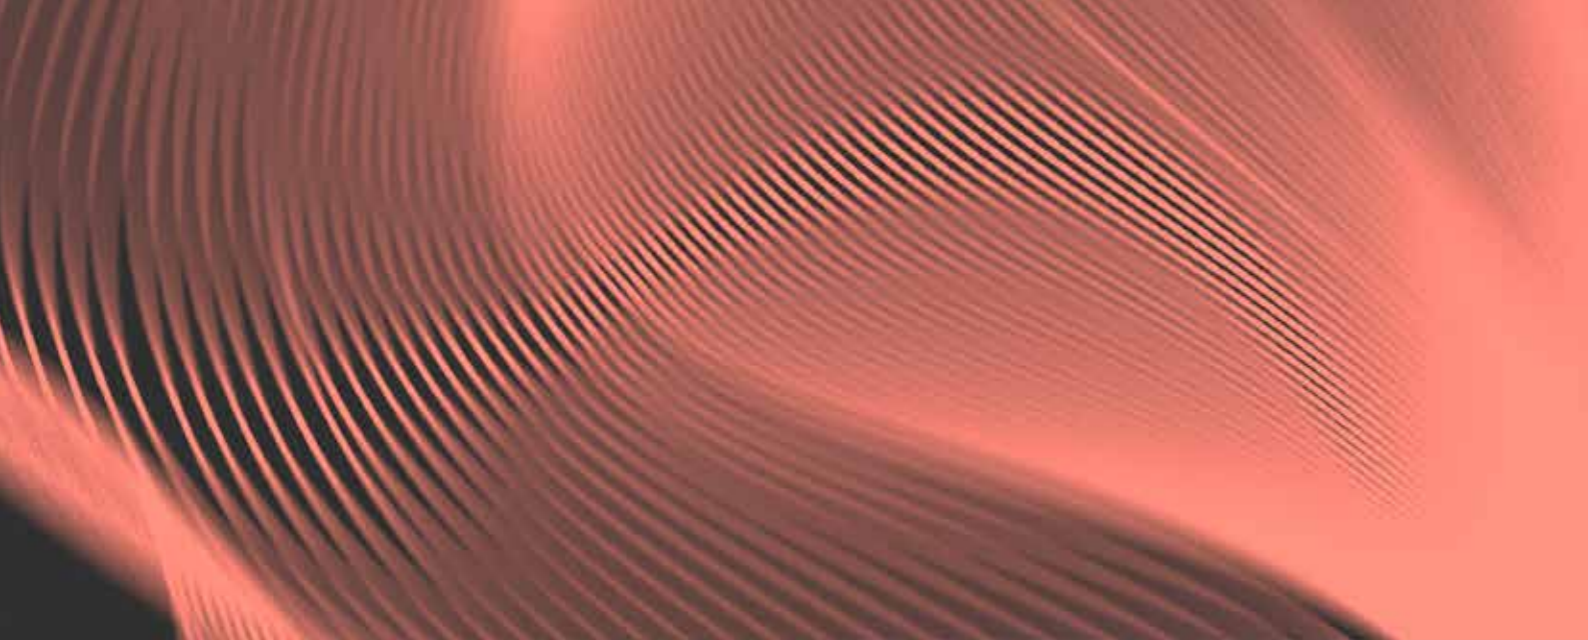

Access the website



Sales brochure

# Ovens

Compact ovens - iKORE Kompact .....	129
Industrial combi ovens - iKORE .....	133
— Advance .....	133
— Concept .....	147
Vacuum packers .....	161
Set-ups .....	163
— Stacking solutions .....	163
— Cook&Chill solutions .....	164
Other accessories .....	167
— Cleaning, racks, trolleys, containers .....	167

A new era of intelligent cooking



User experience

**A chef centred design**

Designed all through with the professionals' needs in mind, making it the perfect balance of quality, efficiency and comfort.



Food safety

**Hygiene, above all**

HACCP system, renewal of the inner water tank every 24h, 6-level automatic cleaning and more, to always guarantee the wellbeing of the consumer.

Open access through MyFagor



Smart cooking

**It's intelligence, not magic**

Powered by digital and technological intelligence to standardise the culinary processes in the most efficient way thanks to iCooking, Additional functions and Multitray.



Climate control

**Your desired cooking results**

Complete precision in the cooking chamber due to the humidity sensor and uniform heat distribution with a 6-speed two-way ventilation system.



Robust design

**Built to last**

The structure is 100% stainless steel and IPX5 protection, to face any culinary challenges with the highest demanding standards.



FagorKconnect


**Connected for a maximum performance**

Connected to ease, supervise and manage the daily work with a realtime vision and in a remote way.

**\*Standard in Advance models.**



iKORE ovens

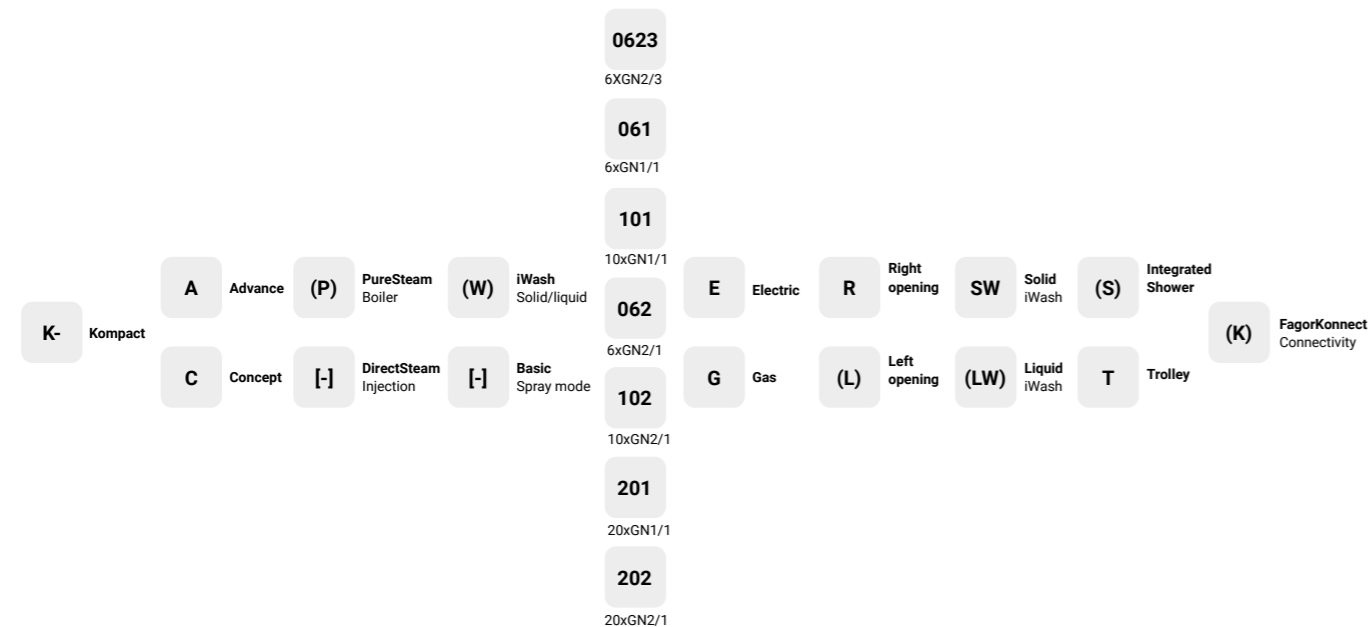

Customized to taste

ADVANCE

**Cooking quality, efficiency and intelligence.**

For the more revolutionary, those who pursue innovation through the latest technological advances, in a culinary world full of creativity.



Features	APW	AP	AW	A
<b>PureSteam</b> (boiler) 100% pure steam generator, with programmed descaling.	•	•	-	-
<b>DirectSteam</b> (Injection)	-	-	•	•
<b>iClima</b> Management and regulation of the real humidity in the chamber with 1% accuracy.	•	•	•	•
<b>EZ sensor</b> Internal multipoint core temperature probe.	•	•	•	•
<b>Multiprobe</b> Possibility to use up to 3 probes in the same cooking process: EZ sensor + 2 external probes (SV/ST).	◦	◦	◦	◦
<b>Functions</b>				
<b>FagorCookingCenter</b> (recipe collection)	•	•	•	•
<b>mCooking</b> - Manual cooking modes: Low and super-steam (30-130°C), Mixed (30-300°C) and Convection (30-300°C).	•	•	•	•
<b>iCooking</b> Intelligent cooking processes with automatic adjustment of their phases and parameters.	•	•	•	•
<b>iFunctions</b> Intelligent cooking processes with automatic adjustment of their phases and parameters.	•	•	•	•
<b>Multitray</b> Cooking management system by time and tray in the same climate.	•	•	•	•
<b>Control</b>				
<b>FagorTouch</b> 10.1" TFT capacitive glass display (7" on 0623 oven and Kompact versions)	•	•	•	•
<b>EasyCooking</b> Owner-customised interface with user and password control.	•	•	•	•
<b>Hygiene</b>				
<b>iWash SW</b> Efficient cleaning system with solid detergent and rinse aid.	•	-	•	-
<b>iWash LW</b> Efficient cleaning system with liquid detergent and possibility of remote execution.	◦	-	◦	-
<b>Integrated hand-held retractable shower.</b>	◦	◦	◦	◦
<b>HACCP</b> available remotely and with USB	•	•	•	•
<b>Connectivity</b>				
<b>FagorKconnect</b>	•	•	•	•
<b>Ethernet / Wifi</b>	•	•	•	•
<b>USB port</b>	•	•	•	•

- Standard
- Optional
- Not available

CONCEPT

**Simplicidad, potencia y robustez.**

For the more conservative, faithful to the traditional gastronomic methods, but are looking for the maximum performance in a quick and easy way.



Features	CPW	CP	CW	C
<b>PureSteam</b> (boiler) 100% pure steam generator, with programmed descaling.	•	•	-	-
<b>DirectSteam</b> (Injection)	-	-	•	•
<b>ClimaControl</b> Management and regulation of the real humidity in the chamber with 10% accuracy.	•	•	•	•
<b>EZ sensor</b> Internal multipoint core temperature probe.	•	•	•	•
<b>Monoprobe</b> Possibility to use only one probe per cooking: EZ sensor or external probe (SV)	◦	◦	◦	◦
<b>Functions</b>				
<b>FagorRecipeCenter</b> (recipe collection)	•	•	•	•
<b>mCooking</b> - Manual cooking modes: Low and super-steam (30-130°C), Mixed (30-300°C) and Convection (30-300°C).	•	•	•	•
<b>Cooking mode</b> Predefined cooking recipes.	•	•	•	•
<b>Funciones adicionales</b> Predefined cooking processes.	•	•	•	•
-	-	-	-	-
<b>Control</b>				
<b>FagorDial</b> 2.8" display with rotary push control and manual buttons with segment display.	•	•	•	•
-	-	-	-	-
<b>Higiene</b>				
<b>iWash SW</b> Efficient cleaning system with solid detergent and rinse aid.	•	-	•	-
<b>iWash LW</b> Efficient cleaning system with liquid detergent and possibility of remote execution.	◦	-	◦	-
<b>Integrated hand-held retractable shower.</b>	◦	◦	◦	◦
<b>HACCP</b> available remotely and with USB	•	•	•	•
<b>Connectivity</b>				
-	-	-	-	-
-	-	-	-	-
<b>USB port</b>	•	•	•	•



Explore the many benefits that FagorKonnnect provides, and find out in detail how you can specifically enhance the functionality of our iKORE ovens.

#### Recipe management:


- Import and export recipes from/to multiple ovens in bulk.
- Easy recipe creation and recipe repository By Fagor
- Create carts combining several recipes, sharing the same climate.
- Import recipes, carts and/or folders from the oven to FagorKonnnect

#### Detailed data displayed in real time:

- Phase or recipe
- Cooking Mode
- Cooking control
- Temperature
- Probe temperature setpoint
- Humidity level
- Turbine Speed Level
- Humidification level
- Door Status
- Phase Remaining Time
- Probe temperature

#### Specific graphs designed for the ovens analysis:

- Device status (cooking, washing, sat menu, alarm, available, offline, offline...)
- Cooked foods performed by day and by device
- Washes executed per day and device
- Device productivity
- Washing occupation
- Executed cooks by recipe
- Error analysis

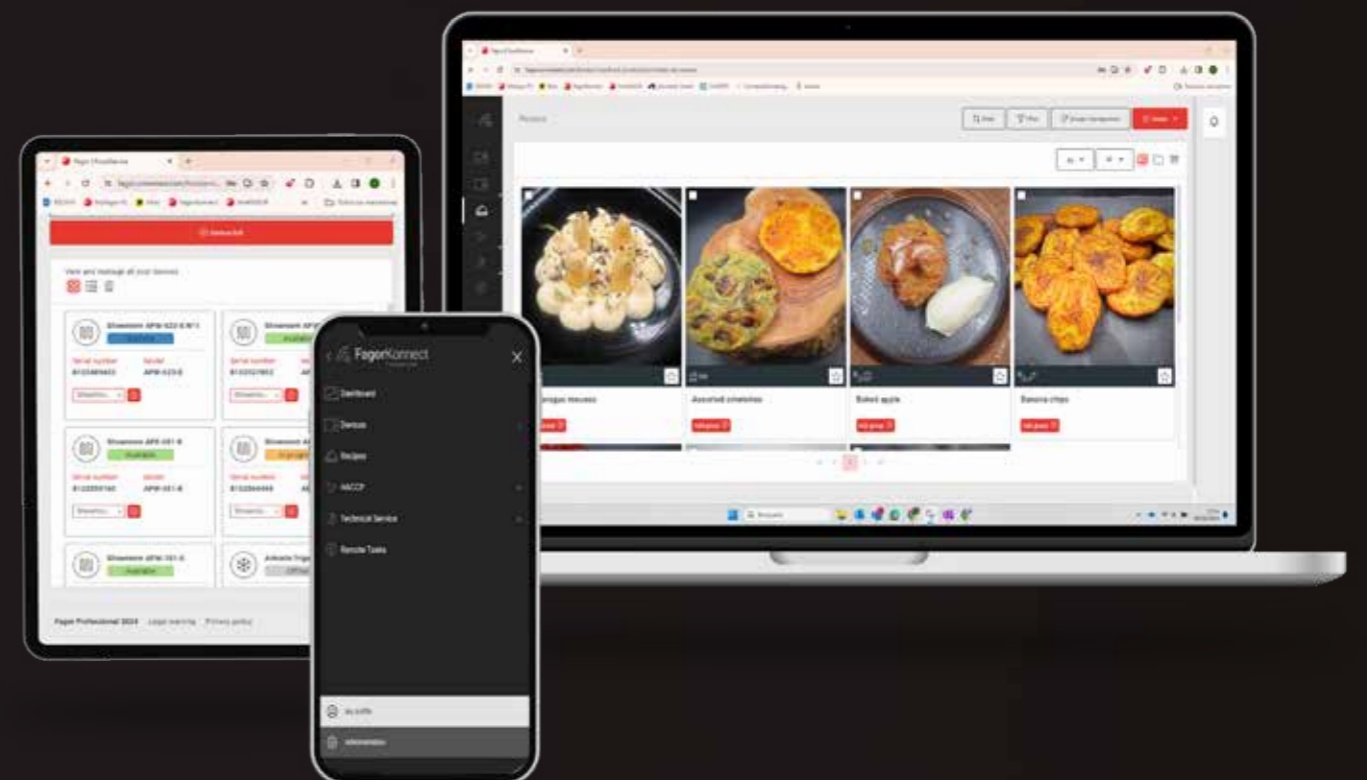



ADVANCE





## iKORE Kompact 061

PureSteam or DirectSteam






General information		Version	
FIELD	DATA	 ELECTRIC (E)	 NATURAL GAS (G)
Capacity (standard)	Racks and tray type	6 GN1/1	No version available
	Spacing between rack rails	47mm	-
Energy supply (standard)	Electric power	7,8 kW	-
	Frecuency	50/60 Hz	-
	Voltage	380-415V 3N	-
	Width	530mm	-
Dimensions and weight	Depth (with handle)	815mm (874mm)	-
	Height	760mm	-
	Net weight (gross)	~118,5Kg (145Kg)	-

## Codes and prices

HUMIDITY	WASHING	SHOWER	MODEL	 CODE	€	 CODE	€
 PureSteam boiler	Solid iWash	-	K-APW-061-E SW R K	19103865	-	-	-
	Modo Spray	-	K-AP-061-E R K	19103864	-	-	-
 DirectSteam injection	Solid iWash	-	K-AW-061-E SW R K	19103863	-	-	-
	Modo Spray	-	K-A-061-E R K	19103862	-	-	-

## Configurable options

OPTION	NAMING	DESCRIPTION	CONF. CODE	€
Opening	L	Inverted opening with door hinge on left-hand side	0103-0001	-
Washing	LW*	Liquid iWash *Only available for models with W	0107-0001	-
VOLTAGE OPTIONS			CONF. CODE	€
	230V 3~ 50/60Hz		0102-0001	-
	230V 1N 50/60Hz		0102-0002	-

\* Not convertible oven, standard configuration only

\* Marine version not available

## Accessories K-061

EXTRACTION	MODEL	CONDENSATION HOOD	ACTIVATED CARBON FILTER	HEIGHT (mm)	CODE	€
	EXH-K	x	-	220	19103309	-
	EXH-K CA	x	x	430	19103398	-
	FCA	Replacement for activated carbon filter of EXH-K CA			19107067	-
	Kit EXT-K	Extraction kit for EXH-K hoods			19103375	-
STANDS	MODEL	RACKS (SPACING)	WHEELS	HEIGHT (mm)	CODE	€
	SH-K 85	-	-	850	19103256	-
	SH-R K 85	-	x	850	19103257	-
	SH-B K 85	9 GN1/1 (62mm)	-	850	19103319	-
	SH-BR K 85	9 GN1/1 (62mm)	x	850	19103331	-
	SH-K 103	-	-	1030	19103553	-
	SH-R K 103	-	x	1030	19103554	-
	SH-B K 103	10 GN1/1 (62mm)	-	1030	19103555	-
	SH-BR K 103	10 GN1/1 (62mm)	x	1030	19103556	-
	MSH-K	Levelling support to place a compact oven on a cabinet or stand			19103258	-
EXTERNAL SHOWER KIT	MODEL	DESCRIPTION		CODE	€	
	Kit ducha	External shower kit (not retractable)		19004504	-	
FASTENING KIT	MODEL	DESCRIPTION		CODE	€	
	Kit A-11K	Fastening kit for iKORE Kompact ovens		19106481	-	

x Included

- Not included

For more accessories, check 'other accessories' chapter

ADVANCE

## iKORE Kompact 101

PureSteam or DirectSteam

FagorTouch  
7

General information		Version	
FIELD	DATA	ELECTRIC (E)	NATURAL GAS (G)
Capacity (standard)	Racks and tray type	10 GN1/1	No version available
	Spacing between rack rails	47mm	-
Energy supply (standard)	Electric power	12,8 kW	-
	Frecuency	50/60 Hz	-
	Voltage	380-415V 3N	-
	Width	530mm	-
Dimensions and weight	Depth (with handle)	815mm (874mm)	-
	Height	940mm	-
	Net weight (gross)	~139Kg (174Kg)	-

## Codes and prices

HUMIDITY	WASHING	SHOWER	MODEL	CODE	€	CODE	€
PureSteam boiler	Solid iWash	-	K-APW-101-E SW R K	19103869	-	-	-
	Spray mode	-	K-AP-101-E R K	19103868	-	-	-
DirectSteam injection	Solid iWash	-	K-AW-101-E SW R K	19103867	-	-	-
	Spray mode	-	K-A-101-E R K	19103866	-	-	-

## Configurable options

OPTION	NAMING	DESCRIPTION	CONF. CODE	€
Opening	L	Inverted opening with door hinge on left-hand side	0103-0001	-
Washing	LW*	Liquid iWash *Only available for models with W	0107-0001	-
VOLTAGE OPTIONS			CONF. CODE	€
	230V 3~ 50/60Hz		0102-0001	-
	230V 1N 50/60Hz		0102-0002	-

\* Not convertible oven, standard configuration only

\* Marine version not available

## AccessoriesK-101

EXTRACTION	MODEL	CONDENSATION HOOD	ACTIVATED CARBON FILTER	HEIGHT (mm)	CODE	€
	EXH-K	x	-	220	19103309	-
	EXH-K CA	x	x	430	19103398	-
	FCA	Replacement for activated carbon filter of EXH-K CA			19107067	-
	Kit EXT-K	Extraction kit for EXH-K hoods			19103375	-

STANDS	MODEL	RACKS (SPACING)	WHEELS	HEIGHT (mm)	CODE	€
	SH-K 85	-	-	850	19103256	-
	SH-R K 85	-	x	850	19103257	-
	SH-B K 85	9 GN1/1 (62mm)	-	850	19103319	-
	SH-BR K 85	9 GN1/1 (62mm)	x	850	19103331	-
	SH-K 103	-	-	1030	19103553	-
	SH-R K 103	-	x	1030	19103554	-
	SH-B K 103	10 GN1/1 (62mm)	-	1030	19103555	-
	SH-BR K 103	10 GN1/1 (62mm)	x	1030	19103556	-

	MSH-K	Levelling support to place a compact oven on a cabinet or stand			19103258	-
--	-------	---	--	--	----------	---

EXTERNAL SHOWER KIT	MODEL	DESCRIPTION	CODE	€
	Kit shower	External shower kit (not retractable)	19004504	-
FASTENING KIT	MODEL	DESCRIPTION	CODE	€
	Kit A-11K	Fastening kit for iKORE Kompact ovens	19106481	-

x Included

- Not included

For more accessories, check 'other accessories' chapter

ADVANCE

## iKORE 0623

PureSteam or DirectSteam



General information		Version	
FIELD	DATA	ELECTRIC (E)	NATURAL GAS (G)
Capacity (standard)	Racks and tray type	6 GN2/3	No version available
	Spacing between rack rails	47mm	-
Energy supply (standard)	Electric power	5,8 kW	-
	Frecuency	50/60 Hz	-
	Voltage	380-415V 3N	-
Dimensions and weight	Width	660mm	-
	Depth (with handle)	564mm (630mm)	-
	Height	570mm (600mm)	-
	Net weight (gross)	~66,5Kg (71,5Kg)	-

## Codes and prices

HUMIDITY	WASHING	SHOWER	MODEL	CODE	€	CODE	€
PureSteam boiler	Solid iWash	•	APW-0623-E R SW S K	19079298	☺ STOCK	-	-
		-	APW-0623-E R SW K	19106932	-	-	-
DirectSteam injection	Solid iWash	•	AW-0623-E R SW S K	19106933	-	-	-
		-	AW-0623-E R SW K	19079299	☺ STOCK	-	-

## Configurable options

OPTION	NAMING	DESCRIPTION	CONF. CODE	€	
Lavado	LW*	iWash Líquido *Solo para modelos con W	0107-0001	-	
VOLTAGE OPTIONS				CONF. CODE	€
	230V 3~ 50/60Hz		0102-0061	-	
	230V 1N 50/60Hz		0102-0062	-	
	Marine 440V 3~ 50/60Hz *	*External module, not integrated in the oven	0102-0063	-	

## Accessories 0623

EXTRACTION	MODEL	CONDENSATION HOOD	ACTIVATED CARBON FILTER	HEIGHT (mm)	CODE	€	
	EXH-23	x	-	255	19073213	-	
	EXH-23-CA	x	x	330	19103376	-	
	FCA	Replacement for activated carbon filter of EXH-23 CA			19107067	-	
	Kit EXT-23	Extraction kit for EXH-23 hoods			19096418	-	
	STANDS	MODEL	RACKS (SPACING)	WHEELS	HEIGHT (mm)	CODE	€
	SH-23	-	-	-	850	19103553	-
	SH-23-R	-	-	x	850	19103554	-
	SH-23-B	2 x 6 GN2/3 (68mm)	-	-	850	19103555	-
	SH-23-RB	2 x 6 GN2/3 (68mm)	-	x	850	19103556	-
	SH-23-RBM	Mobile stand with 2 x 1.5l bottles for clean water and drainage	-	x	850	19103256	-
	SHP-23	Wall support for 0623 ovens			19103257	-	
	MSH-23	Levelling support to place a 0623 oven on a cabinet or stand			19103319	-	
FASTENING KIT	MODEL	DESCRIPTION			CODE	€	
	Kit A-23	Fastening kit for 0623 ovens			19106481	-	

x Included  
- Not included

For more accessories, check 'other accessories' chapter

## ADVANCE

## iKORE 061

## PureSteam or DirectSteam



General information		Version	
FIELD	DATA	ELECTRIC (E)	NATURAL GAS (G)
Capacity (standard)	Racks and tray type	6 GN1/1	6 GN1/1
	Spacing between rack rails	68mm	68mm
Energy supply (standard)	Electric / gas power	11,1 kW	0,83 kW / 12 kW
	Frecuency	50/60 Hz	50 Hz
	Voltage	380-415V 3N	230V 1N
Dimensions and weight	Width	895mm	895mm
	Depth (with handle)	817mm (883mm)	817mm (883mm)
	Gas with boiler versions	-	922mm (988mm)
	Height (with hinge)	846mm (877mm)	846mm (877mm)
	Net weight (gross)	~118,5Kg (145Kg)	~146Kg (162,5Kg)

## Codes and prices

HUMIDITY	WASHING	SHOWER	MODEL	CODE	€	CODE	€
PureSteam boiler	Solid iWash	•	APW-061-(E/G) R SW S K	19078616	STOCK	-	19088205
		-	APW-061-(E/G) R SW K	19106934	-	19106935	-
DirectSteam injection	Solid iWash	•	AW-061-(E/G) R SW S K	19103818	STOCK	-	19106936
		-	AW-061-(E/G) R SW K	19078613	STOCK	-	19088204

## Configurable options

OPTION	NAMING	DESCRIPTION	CONF. CODE	€
Opening	L	Inverted opening with door hinge on left-hand side	0103-0001	-
Washing	LW*	Liquid iWash *Only available for models with W	0107-0001	-

VOLTAGE OPTIONS	CONF. CODE	€	GAS OPTIONS	CONF. CODE	€
230V 3~ 50/60Hz	0102-0001	-	Butane-Propane LPG	0101-0001	-
230V 1N 50/60Hz	0102-0002	-	Town gas TG	0101-0002	-
Marine 440V 3~ 50/60Hz	0102-0003	-			
230V 1N 60Hz	0102-0007	-			
230V 2~ 50Hz	0102-0008	-			
230V 2~ 60Hz	0102-0009	-			

## Accessories 061

EXTRACCIÓN	MODEL	CONDENSATION HOOD	ACTIVATED CARBON FILTER	LEFT OPENING (L)	HEIGHT (mm)				CODE	€	
	EXH-11	x	-	-	303	x	-	-	19085190	-	
	EXH-11 L	x	-	x	303	x	-	-	19103220	-	
	EXH-11-CA	x	x	-	363	x	-	-	19103393	-	
	EXH-11-CA L	x	x	x	363	x	-	-	19104232	-	
	FCA	Replacement for activated carbon filter of EXH-11 CA				x	-	-	19107067	-	
	Kit EXT-11	Extraction kit for EXH-11 hoods				x	-	-	19096417	-	
	Kit CTG-11	Flue gas exhaust stack for 061 ovens				-	x	x	19095581	-	
STANDS	MODEL	RACKS ( SPACING)	WHEELS	DOORS	HEIGHT (mm)				CODE	€	
	SH-11-65	-	-	-	650	x	x	-	19082326	-	
						-	-	x	19082327	-	
	SH-11-65 R	-	x	-	650	x	x	-	19083237	-	
							-	-	x	19083234	-
	SH-11-65 B	2 x 6 GN1/1 (68mm)	-	-	650	x	x	-	19082006	-	
							-	-	x	19082005	-
	SH-11-65 BR	2 x 6 GN1/1 (68mm)	x	-	650	x	x	-	19083238	-	
						-	-	x	19083239	-	
	SH-11- 65 BCP	2 x 6 GN1/1 (68mm)	-	x	650	x	x	-	19079211	-	
						-	-	x	19079233	-	
	SH-11-85	-	-	-	850	x	x	-	19103370	-	
						-	-	x	19103413	-	
	SH-11-85 R	-	x	-	850	x	x	-	19103373	-	
						-	-	x	19103415	-	
	SH-11-85 B	2 x 6 GN1/1 (68mm)	-	-	850	x	x	-	19103369	-	
						-	-	x	19103442	-	
	SH-11-85 BR	2 x 6 GN1/1 (68mm)	x	-	850	x	x	-	19103381	-	
						-	-	x	19103443	-	
STRUCTURES	MODEL	RACKS ( SPACING)							CODE	€	
	EB-061*	Mobile rack for 6 GN1/1 trays (62mm)				x	x	x	19011559	-	
	EP-061*	Mobile rack for 18 plates Ø31 (64mm) * GE-11 and CP-11(-R) required				x	x	x	19013353	-	
TROLLEYS	MODEL	DESCRIPTION							CODE	€	
	GE-11	Structure rack for EB-061 and EP-061				x	x	x	19011569	-	
	CP-11	Structure support trolley for oven on SH-11-65				x	x	x	19013352	-	
	CP-11-R	Adjustable structure support trolley for oven on SH-11				x	x	x	19018752	-	
PLINTH	MODEL	DESCRIPTION							CODE	€	
	Kit Z-11	Plinth kit				x	x	-	19087303	-	
						-	-	x	19087305	-	

x Included - Not included

For more accessories, check 'other accessories' chapter

For electric ovens only

For gas ovens only

Only for gas ovens with boiler: APW-061-G



## ADVANCE

## iKORE 101

## PureSteam or DirectSteam



General information		Version	
FIELD	DATA	ELECTRIC (E)	NATURAL GAS (G)
Capacity (standard)	Racks and tray type	10 GN1/1	10 GN1/1
	Spacing between rack rails	68mm	68mm
Energy supply (standard)	Electric / gas power	18,6 kW	0,83 kW / 18 kW
	Frecuency	50/60 Hz	50 Hz
	Voltage	380-415V 3N	230V 1N
Dimensions and weight	Width	895mm	895mm
	Depth (with handle)	817mm (883mm)	817mm (883mm)
	Gas with boiler versions	-	922mm (988mm)
	Height (with hinge)	1117mm (1149mm)	1117mm (1149mm)
	Net weight (gross)	~139Kg (174Kg)	~162Kg (197Kg)

## Codes and prices

HUMIDITY	WASHING	SHOWER	MODEL	CODE	€	CODE	€
PureSteam boiler	Solid iWash	•	APW-101-(E/G) R SW S K	19078668	STOCK	-	19088215
		-	APW-101-(E/G) R SW K	19107006	-	19107007	-
DirectSteam injection	Solid iWash	•	AW-101-(E/G) R SW S K	19103817	-	19107008	-
		-	AW-101-(E/G) R SW K	19078671	STOCK	-	19088214

## Configurable options

OPTION	NAMING	DESCRIPTION	CONF. CODE	€
Opening	L	Inverted opening with door hinge on left-hand side	0103-0001	-
Washing	LW*	Liquid iWash *Only available for models with W	0107-0001	-

VOLTAGE OPTIONS	CÓD. CONFIG.	€	GAS OPTIONS	CONF. CODE	€
230V 3~ 50/60Hz	0102-0021	-	Butane-Propane LPG	0101-0001	-
Marine 440V 3~ 50/60Hz	0102-0023	-	Town gas TG	0101-0002	-
230V 1N 60Hz	0102-0027	-			
230V 2~ 50Hz	0102-0028	-			
230V 2~ 60Hz	0102-0029	-			

## Accessories 101

EXTRACTION	MODEL	CONDENSATION HOOD	ACTIVATED CARBON FILTER	LEFT OPENING (L)	HEIGHT (mm)				CODE	€
	EXH-11	x	-	-	303	x	-	-	19085190	-
	EXH-11 L	x	-	x	303	x	-	-	19103220	-
	EXH-11-CA	x	x	-	363	x	-	-	19103393	-
	EXH-11-CA L	x	x	x	363	x	-	-	19104232	-
	FCA	Replacement for activated carbon filter of EXH-11 CA				x	-	-	19107067	-
	Kit EXT-11	Extraction kit for EXH-11 hoods				x	-	-	19096417	-
	Kit CTG-11	Flue gas exhaust stack for 061 ovens				-	x	x	19095581	-
STANDS	MODEL	RACKS ( SPACING)	WHEELS	DOORS	HEIGHT (mm)				CODE	€
	SH-11-65	-	-	-	650	x	x	-	19082326	-
								x	19082327	-
	SH-11-65 R	-	x	-	650	x	x	-	19083237	-
								x	19083234	-
	SH-11-65 B	2 x 6 GN1/1 (68mm)	-	-	650	x	x	-	19082006	-
								x	19082005	-
	SH-11-65 BR	2 x 6 GN1/1 (68mm)	x	-	650	x	x	-	19083238	-
							x	19083239	-	
	SH-11- 65 BCP	2 x 6 GN1/1 (68mm)	-	x	650	x	x	-	19079211	-
								x	19079233	-
	SH-11-85	-	-	-	850	x	x	-	19103370	-
								x	19103413	-
	SH-11-85 R	-	x	-	850	x	x	-	19103373	-
								x	19103415	-
	SH-11-85 B	2 x 6 GN1/1 (68mm)	-	-	850	x	x	-	19103369	-
								x	19103442	-
	SH-11-85 BR	2 x 6 GN1/1 (68mm)	x	-	850	x	x	-	19103381	-
								x	19103443	-
STRUCTURES	MODEL	RACKS ( SPACING)							CODE	€
	EB-101*	Mobile rack for 10 GN1/1 trays (62mm)				x	x	x	19011561	-
	EP-101*	Mobile rack for 30 plates Ø31 (64mm) * GE-11 and CP-11(-R) required				x	x	x	19013354	-
TROLLEYS	MODEL	DESCRIPTION							CODE	€
	GE-11	Structure rack for EB-061 and EP-061				x	x	x	19011569	-
	CP-11	Structure support trolley for oven on SH-11-65				x	x	x	19013352	-
	CP-11-R	Adjustable structure support trolley for oven on SH-11				x	x	x	19018752	-
PLINTH	MODEL	DESCRIPTION							CODE	€
	Kit Z-11	Plinth kit				x	x	-	19087303	-
								x	19087305	-

x Included - Not included

For more accessories, check 'other accessories' chapter

For electric ovens only

For gas ovens only

Only for gas ovens with boiler: APW-101-G

ADVANCE

## iKORE 062

PureSteam or DirectSteam



General information		Version	
FIELD	DATA	ELECTRIC (E)	NATURAL GAS (G)
Capacity (standard)	Racks and tray type	6 GN2/1 (12 GN1/1)	Version no disponible
	Spacing between rack rails	68mm	-
Energy supply (standard)	Electric / gas power	22,2 kW	-
	Frecuency	50/60 Hz	-
	Voltage	380-415V 3N	-
	Width	1134mm	-
Dimensions and weight	Depth (with handle)	1066mm (1134mm)	-
	Height (with hinge)	846mm (877mm)	-
	Net weight (gross)	~190Kg (220Kg)	-

Codes and prices							
HUMIDITY	WASHING	SHOWER	MODEL	CÓDIGO	€	CÓDIGO	€
PureSteam boiler	Solid iWash	•	APW-062-E R SW S	19087724	-	-	-
		-	APW-062-E R SW	19107009	-	-	-
DirectSteam injection	Solid iWash	•	AW-062-E R SW S	19107040	-	-	-
		-	AW-062-E R SW	19088209	-	-	-

Configurable options				
OPTION	NAMING	DESCRIPTION	CONF. CODE	€
Apertura	L	Inverted opening with door hinge on left-hand side	0103-0001	-
Lavado	LW*	Liquid iWash *Only available for models with W	0107-0001	-
VOLTAGE OPTIONS			CONF. CODE	€
	230V 3~ 50/60Hz		0102-0011	-
	Marine 440V 3~ 50/60Hz		0102-0013	-

## Accessories 062

STANDS	MODEL	RACKS ( SPACING)	WHEELS	DOORS	HEIGHT (mm)	CODE	€
	SH-21-65	-	-	-	650	19084190	-
	SH-21-65 R	-	x	-	650	19084191	-
	SH-21-65 B	6 GN1/1 + 6 GN2/1 (68mm)	-	-	650	19083224	-
	SH-21-65 BR	6 GN1/1 + 6 GN2/1 (68mm)	x	-	650	19084192	-
	SH-21-65 BCP	6 GN1/1 + 6 GN2/1 (68mm)	-	x	650	19082394	-
	SH-21-85	-	-	-	850	19103382	-
	SH-21-85 R	-	x	-	850	19103383	-
	SH-21-85 B	6 GN1/1 + 6 GN2/1 (68mm)	-	-	850	19103384	-
	SH-21-85 BR	6 GN1/1 + 6 GN2/1 (68mm)	x	-	850	19103385	-
STRUCTURES	MODEL	RACKS ( SPACING)			CODE	€	
	EB-062*	Mobile rack for 6 GN2/1 trays (62mm)			19095517	-	
	EP-062*	Mobile rack for 28 plates Ø31 (75mm) * GE-21 and CP-21(-R) required			19095518	-	
TROLLEYS	MODEL	DESCRIPTION			CODE	€	
	GE-21	Structure rack for EB-062 and EP-062			19011570	-	
	CP-21	Structure support trolley for oven on SH-21			19013355	-	
	CP-21-R	Adjustable structure support trolley for oven on SH-21			19018751	-	
PLINTH	MODEL	DESCRIPTION			CODE	€	
	Kit Z-21	Plinth kit			19087306	-	

x Included - Not included

For more accessories, check 'other accessories' chapter

ADVANCE

## iKORE 102

PureSteam or DirectSteam

FagorTouch  
10.1"

## General information

FIELD	DATA	Version	
		ELECTRIC (E)	NATURAL GAS (G)
Capacity (standard)	Racks and tray type	10 GN2/1 (20 GN1/1)	10 GN2/1 (20 GN1/1)
	Spacing between rack rails	68mm	68mm
Energy supply (standard)	Electric / gas power	33,6 kW	0,83 kW / 35 kW
	Frecuency	50/60 Hz	50 Hz
Dimensions and weight	Voltage	380-415V 3N	230V 1N
	Width	1134mm	1134mm
	Depth (with handle)	1066mm (1134mm)	1066mm (1134mm)
	Height (with hinge)	1117mm (1149mm)	1117mm (1149mm)
Net weight (gross)	~217Kg (258Kg)	~230Kg (265,5Kg)	

## Codes and prices

HUMIDITY	WASHING	SHOWER	MODEL	CODE	€	CODE	€
PureSteam boiler	Solid iWash	•	APW-102-(E/G) R SW S K	19079785	-	19088221	-
		-	APW-102-(E/G) R SW K	19107041	-	19107042	-
DirectSteam injection	Solid iWash	•	AW-102-(E/G) R SW S K	19107043	-	19107045	-
		-	AW-102-(E/G) R SW K	19079784	-	19088220	-

## Configurable options

OPTION	NAMING	DESCRIPTION	CONF. CODE	€
Opening	L	Inverted opening with door hinge on left-hand side	0103-0001	-
Washing	LW*	Liquid iWash *Only available for models with W	0107-0001	-

VOLTAGE OPTIONS	CONF. CODE	€	GAS OPTIONS	CONF. CODE	€
230V 3~ 50/60Hz	0102-0031	-	Butane-Propane LPG	0101-0001	-
Marine 440V 3~ 50/60Hz	0102-0033	-	Town gas TG	0101-0002	-
230V 1N 60Hz	0102-0037	-			
230V 2~ 50Hz	0102-0038	-			
230V 2~ 60Hz	0102-0039	-			

## Accessories 102

EXTRACTION	MODEL	DESCRIPTION	CODE	€
	Kit CTG-12*	Flue gas discharge stack 102 * For gas ovens only	19095590	-

STANDS	MODEL	RACKS ( SPACING)	WHEELS	DOORS	HEIGHT (mm)	CODE	€
	SH-21-65	-	-	-	650	19084190	-
	SH-21-65 R	-	x	-	650	19084191	-
	SH-21-65 B	6 GN1/1 + 6 GN2/1 (68mm)	-	-	650	19083224	-
	SH-21-65 BR	6 GN1/1 + 6 GN2/1 (68mm)	x	-	650	19084192	-
	SH-21-65 BCP	6 GN1/1 + 6 GN2/1 (68mm)	-	x	650	19082394	-
	SH-21-85	-	-	-	850	19103382	-
	SH-21-85 R	-	x	-	850	19103383	-
	SH-21-85 B	6 GN1/1 + 6 GN2/1 (68mm)	-	-	850	19103384	-
	SH-21-85 BR	6 GN1/1 + 6 GN2/1 (68mm)	x	-	850	19103385	-

STRUCTURES	MODEL	RACKS ( SPACING)	CODE	€
	EB-102*	Mobile rack for 10 GN2/1 trays (62mm)	19011562	-
	EP-102*	Mobile rack for 52 plates Ø31 (75mm) * Necesario GE-21 y CP-21(-R)	19013356	-

TROLLEYS	MODEL	DESCRIPTION	CODE	€
	GE-21	Structure rack for EB-102 and EP-102	19011570	-
	CP-21	Structure support trolley for oven on SH-21	19013355	-
	CP-21-R	Adjustable structure support trolley for oven on SH-21	19018751	-

PLINTH	MODEL	DESCRIPTION	CODE	€
	Kit Z-21	Plinth kit	19087306	-

x Included - Not included

For more accessories, check 'other accessories' chapter

ADVANCE

## iKORE 201

## PureSteam or DirectSteam

FagorTouch  
10.1"

General information		Version	
FIELD	DATA	ELECTRIC (E)	NATURAL GAS (G)
Capacity (standard)	Racks and tray type of trolley (T)*	20 GN1/1	20 GN1/1
	Spacing between rack rails	63mm	63mm
Energy supply (standard)	Electric / gas power	37,2 kW	1,55 kW / 36 kW
	Frecuency	50/60 Hz	50 Hz
	Voltage	380-415V 3N	230V 1N
Dimensions and weight	Width	935mm	935mm
	Depth (with handle)	966mm (1032mm)	966mm (1032mm)
	Height (with hinge)	1840mm (1871mm)	1840mm (1871mm)
	Net weight (gross)	~272,5Kg (331,5Kg)	~309Kg (341,5Kg)

## Codes and prices

HUMIDITY	WASHING	SHOWER	MODEL	CODE	€	CODE	€
PureSteam boiler	Solid iWash	•	APW-201-(E/G) R SW S T K	19079328	-	19088272	-
		-	APW-201-(E/G) R SW T K	19107046	-	19107049	-
DirectSteam injection	Solid iWash	•	AW-201-(E/G) R SW S T K	19107048	-	19107060	-
		-	AW-201-(E/G) R SW T K	19079330  STOCK	-	19091667	-

## Configurable options

OPTION	NAMING	DESCRIPTION	CONF. CODE	€
Washing	LW*	Liquid iWash *Only available for models with W	0107-0001	-
Trolley	Special T	Consult for other trolley configurations	-	consult

VOLTAGE OPTIONS	CONF. CODE	€	GAS OPTIONS	CONF. CODE	€
230V 3~ 50/60Hz	0102-0041	-	Butane-Propane LPG	0101-0001	-
Marine 440V 3~ 50/60Hz	0102-0043	-	Town gas TG	0101-0002	-
230V 1N 60Hz	0102-0047	-			
230V 2~ 50Hz	0102-0048	-			
230V 2~ 60Hz	0102-0049	-			

## Accessories 201

EXTRACTION	MODEL	DESCRIPTION	CODE	€
	Kit CTG-21*	Flue gas discharge stack for 201 * For gas ovens only	19095591	-
TROLLEYS	MODEL	RACKS (SPACING)	CODE	€
	CEB-201	20 GN1/1 (63mm)	19011551	-
	CEB-201-69	18 GN1/1 (69mm)	19103883	-
	CEB-201-80	16 GN1/1 (80mm)	19107454	-
	CEB-201-85	15 GN1/1 (85mm)	19107590	-
	CEP-201	50 plates Ø31 (75mm)	19013357	-
RAMP	MODEL	DESCRIPTION	CODE	€
	RH-201	Levelling ramp for 201 trolley	19044716	-
FASTENING KIT	MODEL	DESCRIPTION	CODE	€
	Kit A-20	Floor fastening kit for 201 ovens	19012270	-
KIT HANDLE	MODEL	DESCRIPTION	CODE	€
	Kit ASA	Side support kit for trolley handle	19087163	-

x Included - Not included

For more accessories, check 'other accessories' chapter

ADVANCE

## iKORE 202

## PureSteam or DirectSteam

FagorTouch  
10.1"

General information		Version	
FIELD	DATA	ELECTRIC (E)	NATURAL GAS (G)
Capacity (standard)	Racks and tray type of trolley (T)*	20 GN2/1 (40 GN1/1)	20 GN2/1 (40 GN1/1)
	Spacing between rack rails	63mm	63mm
Energy supply (standard)	Electric / gas power	67,2 kW	1,55 kW / 65 kW
	Frecuency	50/60 Hz	50 Hz
	Voltage	380-415V 3N	230V 1N
Dimensions and weight	Width	1165mm	1165mm
	Depth (with handle)	1074mm (1140mm)	1074mm (1140mm)
	Height (with hinge)	1840mm (1871mm)	1840mm (1871mm)
	Net weight (gross)	~338Kg (403,5Kg)	~357Kg (422,5Kg)

## Codes and prices

HUMIDITY	WASHING	SHOWER	MODEL	CODE	€	CODE	€
PureSteam calderín	Solid iWash	•	APW-202-(E/G) R SW ST K	19078839	-	19088278	-
		-	APW-202-(E/G) R SW T K	19107061	-	19107062	-
DirectSteam inyección	Solid iWash	•	AW-202-(E/G) R SW ST K	19107063	-	19107064	-
		-	AW-202-(E/G) R SW T K	19078837	-	19091670	-

## Configurable options

OPTION	NAMING	DESCRIPTION	CONF. CODE	€
Washing	LW*	Liquid iWash *Only available for models with W	0107-0001	-
Trolley	Special T	Consult for other trolley configurations	-	consultar

OPCIONES DE VOLTAJE	CONF. CODE	€	GAS OPTIONS	CONF. CODE	€
230V 3~ 50/60Hz	0102-0051	-	Butane-Propane LPG	0101-0001	-
Marine 440V 3~ 50/60Hz	0102-0053	-	Town gas TG	0101-0002	-
230V 1N 60Hz	0102-0057	-			
230V 2~ 50Hz	0102-0058	-			
230V 2~ 60Hz	0102-0059	-			

## Accessories 202

EXTRACTION	MODEL	DESCRIPTION	CODE	€
	Kit CTG-22*	Flue gas discharge stack for 202 *For gas ovens only	19095592	-
TROLLEYS	MODEL	RACKS (SPACING)	CODE	€
	CEB-202	20 GN2/1 (63mm)	19011550	-
	CEB-202-69	18 GN2/1 (69mm)	19103884	-
	CEB-202-80	16 GN2/1 (80mm)	19107481	-
	CEB-202-85	15 GN2/1 (85mm)	19107588	-
	CEP-202- 90	90 plates Ø31 (75mm)	19081933	-
	CEP-202	100 plates Ø31 (75mm)	19011552	-
RAMP	MODEL	DESCRIPTION	CODE	€
	RH-202	Levelling ramp for 202 trolley	19034438	-
FASTENING KIT	MODEL	DESCRIPTION	CODE	€
	Kit A-20	Floor fastening kit for 202 ovens	19012270	-
KIT HANDLE	MODEL	DESCRIPTION	CODE	€
	Kit ASA	Side support kit for trolley handle	19087163	-

x Included - Not included

For more accessories, check 'other accessories' chapter

## CONCEPT

## iKORE 0623

## PureSteam or DirectSteam



General information		Version	
FIELD	DATA	ELECTRIC (E)	NATURAL GAS (G)
Capacity (standard)	Racks and tray type	6 GN2/3	Version no disponible
	Spacing between rack rails	47mm	-
Energy supply (standard)	Electric power	5,8 kW	-
	Frecuency	50/60 Hz	-
	Voltage	380-415V 3N~	-
Dimensions and weight	Width	660mm	-
	Depth (with handle)	564mm (630mm)	-
	Height	570mm (600mm)	-
	Net weight (gross)	~66,5Kg (71,5Kg)	-

## Codes and prices

HUMIDITY	WASHING	SHOWER	MODEL	CODE	€	CODE	€
PureSteam boiler	Solid iWash	●	CPW-0623-E R SW S	19073931	-	-	-
		-	CPW-0623-E R SW	19107065	-	-	-
	Spray mode	●	CP-0623-E R S	19096907	-	-	-
		-	CP-0623-E R	19098462	-	-	-
DirectSteam injection	Solid iWash	●	CW-0623-E R SW S	19107169	-	-	-
		-	CW-0623-E R SW	19075070	-	-	-
	Spray mode	●	C-0623-E R S	19107168	-	-	-
		-	C-0623-E R	19075013	-	-	-

## Configurable options

OPTION	NAMING	DESCRIPTION	CONF. CODE	€
Washing	LW*	Liquid iWash *Only available for models with W	0107-0001	-
OPCIONES DE VOLTAJE			CONF. CODE	€
	230V 3~ 50/60Hz		0102-0061	-
	230V 1N 50/60Hz		0102-0062	-
	Marine 440V 3~ 50/60Hz *	*External module, not integrated in the oven	0102-0063	-

## Accessories 0623

EXTRACTION	MODEL	CONDENSATION HOOD	ACTIVATED CARBON FILTER	HEIGHT (mm)	CODE	€	
	EXH-23	x	-	255	19073213	-	
	EXH-23-CA	x	x	330	19103376	-	
	FCA	Replacement for activated carbon filter of EXH-23 CA			19107067	-	
	Kit EXT-23	Extraction kit for EXH-23 hoods			19096418	-	
	STANDS	MODEL	RACKS (SPACING)	WHEELS	HEIGHT (mm)	CODE	€
	SH-23	-	-	-	850	19103553	-
	SH-23-R	-	-	x	850	19103554	-
	SH-23-B	2 x 6 GN2/3 (68mm)	-	-	850	19103555	-
	SH-23-RB	2 x 6 GN2/3 (68mm)	-	x	850	19103556	-
	SH-23-RBM	Mobile stand with 2 x 1.5l bottles for clean water and drainage	-	x	850	19103256	-
	SHP-23	Wall support for 0623 ovens				19103257	-
	MSH-23	Levelling support to place a 0623 oven on a cabinet or stand			19103319	-	
FASTENING KIT	MODEL	DESCRIPTION			CODE	€	
	Kit A-23	Fastening kit for 0623 ovens			19106481	-	

x Included

- Not included

For more accessories, check 'other accessories' chapter

## CONCEPT

## iKORE 061

## PureSteam or DirectSteam



General information		Version	
FIELD	DATA	ELECTRIC (E)	NATURAL GAS (G)
Capacity (standard)	Racks and tray type	6 GN1/1	6 GN1/1
	Spacing between rack rails	68mm	68mm
Energy supply (standard)	Electric / gas power	11,1 kW	0,83 kW / 12 kW
	Frecuency	50/60 Hz	50 Hz
	Voltage	380-415V 3N	230V 1N
Dimensions and weight	Width	895mm	895mm
	Depth (with handle)	817mm (883mm)	817mm (883mm)
	Gas with boiler versions	-	922mm (988mm)
	Height (with hinge)	846mm (877mm)	846mm (877mm)
	Net weight (gross)	~118,5Kg (145Kg)	~146Kg (162,5Kg)

## Codes and prices

HUMIDITY	WASHING	SHOWER	MODEL	CODE	€	CODE	€
PureSteam boiler	Solid iWash	●	CPW-061-(E/G) R SW S	19073648	-	19088202	-
		-	CPW-061-(E/G) R SW	19107352	-	19107353	-
	Spray mode	●	CP-061-(E/G) R S	19096875	-	19096877	-
		-	CP-061-(E/G) R	19098464	-	19107350	-
DirectSteam injection	Solid iWash	●	CW-061-(E/G) R SW S	19107357	-	19107356	-
		-	CW-061-(E/G) R SW	19076322	-	19088201	-
	Spray mode	●	C-061-(E/G) R S	19107354	-	19107355	-
		-	C-061-(E/G) R	19074625	-	19088200	-

## Configurable options

OPTION	NAMING	DESCRIPTION	CONF. CODE	€
Opening	L	Inverted opening with door hinge on left-hand side	0103-0001	-
Washing	LW*	Liquid iWash *Only available for models with W	0107-0001	-

VOLTAGE OPTIONS	CONF. CODE	€
230V 3~ 50/60Hz	0102-0001	-
230V 1N 50/60Hz	0102-0002	-
Marine 440V 3~ 50/60Hz	0102-0003	-
230V 1N 60Hz	0102-0007	-
230V 2~ 50Hz	0102-0008	-
230V 2~ 60Hz	0102-0009	-

GAS OPTIONS	CONF. CODE	€
Butane-Propane LPG	0101-0001	-
Town gas TG	0101-0002	-

## Accessories 061

EXTRACCIÓN	MODEL	CONDENSATION HOOD	ACTIVATED CARBON FILTER	LEFT OPENING (L)	HEIGHT (mm)				CODE	€
	EXH-11	x	-	-	303	x	-	-	19085190	-
	EXH-11 L	x	-	x	303	x	-	-	19103220	-
	EXH-11-CA	x	x	-	363	x	-	-	19103393	-
	EXH-11-CA L	x	x	x	363	x	-	-	19104232	-

FCA	Replacement for activated carbon filter of EXH-11 CA		x	-	-	-	-	-	19107067	-
	Kit EXT-11	Extraction kit for EXH-11 hoods		x	-	-	-	-	19096417	-
	Kit CTG-11	Flue gas exhaust stack for 061 ovens		-	x	x	x	-	19095581	-

STANDS	MODEL	RACKS ( SPACING)	WHEELS	DOORS	HEIGHT (mm)				CODE	€
	SH-11-65	-	-	-	650	x	x	-	19082326	-
						-	-	x	19082327	-
	SH-11-65 R	-	x	-	650	x	x	-	19083237	-
						-	-	x	19083234	-
	SH-11-65 B	2 x 6 GN1/1 (68mm)	-	-	650	x	x	-	19082006	-
						-	-	x	19082005	-
	SH-11-65 BR	2 x 6 GN1/1 (68mm)	x	-	650	x	x	-	19083238	-
						-	-	x	19083239	-
	SH-11- 65 BCP	2 x 6 GN1/1 (68mm)	-	x	650	x	x	-	19079211	-
						-	-	x	19079233	-
	SH-11-85	-	-	-	850	x	x	-	19103370	-
						-	-	x	19103413	-
	SH-11-85 R	-	x	-	850	x	x	-	19103373	-
						-	-	x	19103415	-
	SH-11-85 B	2 x 6 GN1/1 (68mm)	-	-	850	x	x	-	19103369	-
						-	-	x	19103442	-
	SH-11-85 BR	2 x 6 GN1/1 (68mm)	x	-	850	x	x	-	19103381	-
						-	-	x	19103443	-

STRUCTURES	MODEL	RACKS ( SPACING)				CODE	€
	EB-061*	Mobile rack for 6 GN1/1 trays (62mm)	x	x	x	19011559	-

	EP-061*	Mobile rack for 18 plates Ø31 (64mm) * GE-11 and CP-11(-R) required	x	x	x	19013353	-
--	---------	--	---	---	---	----------	---

TROLLEYS	MODEL	DESCRIPTION				CODE	€
	GE-11	Structure rack for EB-061 and EP-061	x	x	x	19011569	-
	CP-11	Structure support trolley for oven on SH-11-65	x	x	x	19013352	-
	CP-11-R	Adjustable structure support trolley for oven on SH-11	x	x	x	19018752	-

PLINTH	MODEL	DESCRIPTION				CODE	€
	Kit Z-11	Plinth kit	x	x	-	19087303	-
			-	-	x	19087305	-

x Included - Not included

For more accessories, check 'other accessories' chapter

For electric ovens only

For gas ovens only

Only for gas ovens with boiler: APW-061-G

## CONCEPT

## iKORE 101

## PureSteam or DirectSteam



General information		Version	
FIELD	DATA	ELECTRIC (E)	NATURAL GAS (G)
Capacity (standard)	Racks and tray type	10 GN1/1	10 GN1/1
	Spacing between rack rails	68mm	68mm
Energy supply (standard)	Electric / gas power	18,6 kW	0,83 kW / 18 kW
	Frecuency	50/60 Hz	50 Hz
	Voltage	380-415V 3N	230V 1N
Dimensions and weight	Width	895mm	895mm
	Depth (with handle)	817mm (883mm)	817mm (883mm)
	Gas with boiler versions	-	922mm (988mm)
	Height (with hinge)	1117mm (1149mm)	1117mm (1149mm)
	Net weight (gross)	~139Kg (174Kg)	~162Kg (197Kg)

## Codes and prices

HUMIDITY	WASHING	SHOWER	MODEL	CODE	€	CODE	€
PureSteam boiler	Solid iWash	●	CPW-101-(E/G) R SW S	19072806	-	19088212	-
		-	CPW-101-(E/G) R SW	19107359	-	19107360	-
	Spray mode	●	CP-101-(E/G) R S	19096891	-	19096893	-
		-	CP-101-(E/G) R	19098465	-	19107358	-
DirectSteam injection	Solid iWash	●	CW-101-(E/G) R SW S	19107363	-	19107364	-
		-	CW-101-(E/G) R SW	19073625	-	19088211	-
	Spray mode	●	C-101-(E/G) R S	19107361	-	19107362	-
		-	C-101-(E/G) R	19078439	-	19088210	-

## Configurable options

OPTION	NAMING	DESCRIPTION	CONF. CODE	€
Opening	L	Inverted opening with door hinge on left-hand side	0103-0001	-
Washing	LW*	Liquid iWash *Only available for models with W	0107-0001	-

VOLTAGE OPTIONS	CONF. CODE	€
230V 3~ 50/60Hz	0102-0021	-
Marine 440V 3~ 50/60Hz	0102-0023	-
230V 1N 60Hz	0102-0027	-
230V 2~ 50Hz	0102-0028	-
230V 2~ 60Hz	0102-0029	-

GAS OPTIONS	CONF. CODE	€
Butane-Propane LPG	0101-0001	-
Gas villa TG (Town gas)	0101-0002	-

## Accessories 101

EXTRACTION	MODEL	CONDENSATION HOOD	ACTIVATED CARBON FILTER	LEFT OPENING (L)	HEIGHT (mm)				CODE	€
	EXH-11	x	-	-	303	x	-	-	19085190	-
	EXH-11 L	x	-	x	303	x	-	-	19103220	-
	EXH-11-CA	x	x	-	363	x	-	-	19103393	-
	EXH-11-CA L	x	x	x	363	x	-	-	19104232	-

FCA	Replacement for activated carbon filter of EXH-11 CA		x	-	-	-	-	-	19107067	-
	Kit EXT-11	Extraction kit for EXH-11 hoods		x	-	-	-	-	19096417	-
	Kit CTG-11	Flue gas exhaust stack for 061 ovens		-	x	x	x	-	19095581	-

STANDS	MODEL	RACKS ( SPACING)	WHEELS	DOORS	HEIGHT (mm)				CODE	€
	SH-11-65	-	-	-	650	x	x	-	19082326	-
						-	-	x	19082327	-
	SH-11-65 R	-	x	-	650	x	x	-	19083237	-
						-	-	x	19083234	-
	SH-11-65 B	2 x 6 GN1/1 (68mm)	-	-	650	x	x	-	19082006	-
						-	-	x	19082005	-
	SH-11-65 BR	2 x 6 GN1/1 (68mm)	x	-	650	x	x	-	19083238	-
						-	-	x	19083239	-
	SH-11- 65 BCP	2 x 6 GN1/1 (68mm)	-	x	650	x	x	-	19079211	-
						-	-	x	19079233	-
	SH-11-85	-	-	-	850	x	x	-	19103370	-
						-	-	x	19103413	-
	SH-11-85 R	-	x	-	850	x	x	-	19103373	-
						-	-	x	19103415	-
	SH-11-85 B	2 x 6 GN1/1 (68mm)	-	-	850	x	x	-	19103369	-
						-	-	x	19103442	-
	SH-11-85 BR	2 x 6 GN1/1 (68mm)	x	-	850	x	x	-	19103381	-
						-	-	x	19103443	-

STRUCTURES	MODEL	RACKS ( SPACING)				CODE	€
	EB-101*	Mobile rack for 10 GN1/1 trays (62mm)	x	x	x	19011561	-

	EP-101*	Mobile rack for 30 plates Ø31 (64mm) * GE-11 and CP-11(-R) required	x	x	x	19013354	-
--	---------	--	---	---	---	----------	---

TROLLEYS	MODEL	DESCRIPTION				CODE	€
	GE-11	Structure rack for EB-061 and EP-061	x	x	x	19011569	-
	CP-11	Structure support trolley for oven on SH-11-65	x	x	x	19013352	-
	CP-11-R	Adjustable structure support trolley for oven on SH-11	x	x	x	19018752	-

PLINTH	MODEL	DESCRIPTION				CODE	€
	Kit Z-11	Plinth kit	x	x	-	19087303	-
			-	-	x	19087305	-

x Included - Not included

For more accessories, check 'other accessories' chapter

For electric ovens only

For gas ovens only

Only for gas ovens with boiler: APW-101-G



## CONCEPT

## iKORE 062

## PureSteam or DirectSteam



General information		Version	
FIELD	DATA	ELECTRIC (E)	NATURAL GAS (G)
Capacity (standard)	Racks and tray type	6 GN2/1	Version no disponible
	Spacing between rack rails	68mm	-
Energy supply (standard)	Electric / gas power	22,2 kW	-
	Frecuency	50/60 Hz	-
	Voltage	380-415V 3N	-
	Width	1134mm	-
Dimensions and weight	Depth (with handle)	1066mm (1134mm)	-
	Height (with hinge)	846mm (877mm)	-
	Net weight (gross)	~190Kg (220Kg)	-

Codes and prices							
HUMIDITY	WASHING	SHOWER	MODEL	CODE	€	CODE	€
PureSteam boiler	Solid iWash	●	CPW-062-E R SW S	19087480	-	-	-
		-	CPW-062-E R SW	19107366	-	-	-
	Spray mode	●	CP-062-E R S	19096879	-	-	-
		-	CP-062-E R	19107365	-	-	-
DirectSteam injection	Solid iWash	●	CW-062-E R SW S	19107368	-	-	-
		-	CW-062-E R SW	19088207	-	-	-
	Spray mode	●	C-062-E R S	19107367	-	-	-
		-	C-062-E R	19088206	-	-	-

Configurable options				
OPTION	NAMING	DESCRIPTION	CONF. CODE	€
Opening	L	Inverted opening with door hinge on left-hand side	0103-0001	-
Washing	LW*	Liquid iWash *Only available for models with W	0107-0001	-

VOLTAGE OPTIONS			CONF. CODE	€
	230V 3~ 50/60Hz		0102-0011	-
	Marine 440V 3~ 50/60Hz		0102-0013	-

## Accessories 062

STANDS	MODEL	RACKS ( SPACING)	WHEELS	DOORS	HEIGHT (mm)	CODE	€
	SH-21-65	-	-	-	650	19084190	-
	SH-21-65 R	-	x	-	650	19084191	-
	SH-21-65 B	6 GN1/1 + 6 GN2/1 (68mm)	-	-	650	19083224	-
	SH-21-65 BR	6 GN1/1 + 6 GN2/1 (68mm)	x	-	650	19084192	-
	SH-21-65 BCP	6 GN1/1 + 6 GN2/1 (68mm)	-	x	650	19082394	-
	SH-21-85	-	-	-	850	19103382	-
	SH-21-85 R	-	x	-	850	19103383	-
	SH-21-85 B	6 GN1/1 + 6 GN2/1 (68mm)	-	-	850	19103384	-
	SH-21-85 BR	6 GN1/1 + 6 GN2/1 (68mm)	x	-	850	19103385	-
STRUCTURES	MODEL	RACKS ( SPACING)			CODE	€	
	EB-062*	Mobile rack for 6 GN2/1 trays (62mm)			19095517	-	
	EP-062*	Mobile rack for 28 plates Ø31 (75mm) * GE-21 and CP-21(-R) required			19095518	-	
TROLLEYS	MODEL	DESCRIPTION			CODE	€	
	GE-21	Structure rack for EB-062 and EP-062			19011570	-	
	CP-21	Structure support trolley for oven on SH-21			19013355	-	
	CP-21-R	Adjustable structure support trolley for oven on SH-21			19018751	-	
PLINTH	MODEL	DESCRIPTION			CODE	€	
	Kit Z-21	Plinth kit			19087306	-	

x Included - Not included

For more accessories, check 'other accessories' chapter

## CONCEPT

## iKORE 102

## PureSteam o DirectSteam



General information		Version	
FIELD	DATA	ELECTRIC (E)	NATURAL GAS (G)
Capacity (standard)	Racks and tray type	10 GN2/1 (20 GN1/1)	10 GN2/1 (20 GN1/1)
	Spacing between rack rails	68mm	68mm
	Electric / gas power	33,6 kW	0,83 kW / 35 kW
Energy supply (standard)	Frecuency	50/60 Hz	50 Hz
	Voltage	380-415V 3N	230V 1N
Dimensions and weight	Width	1134mm	1134mm
	Depth (with handle)	1066mm (1134mm)	1066mm (1134mm)
	Height (with hinge)	1117mm (1149mm)	1117mm (1149mm)
	Net weight (gross)	~217Kg (258Kg)	~230Kg (265,5Kg)

Codes and prices							
HUMIDITY	WASHING	SHOWER	MODEL	CODE	€	CODE	€
PureSteam boiler	Solid iWash	•	CPW-102-(E/G) R SW S	19079303	-	19088218	-
		-	CPW-102-(E/G) R SW	19107371	-	19107372	-
	Spray mode	•	CP-102-(E/G) R S	19096895	-	19096897	-
		-	CP-102-(E/G) R	19107369	-	19107370	-
DirectSteam injection	Solid iWash	•	CW-102-(E/G) R SW S	19107455	-	19107456	-
		-	CW-102-(E/G) R SW	19079564	-	19088217	-
	Spray mode	•	C-102-(E/G) R S	19107348	-	19107349	-
		-	C-102-(E/G) R	19079594	-	19088216	-

Configurable options				
OPTION	NAMING	DESCRIPTION	CONF. CODE	€
Opening	L	Inverted opening with door hinge on left-hand side	0103-0001	-
Washing	LW*	Liquid iWash *Only available for models with W	0107-0001	-

OPCIONES DE VOLTAJE	CÓD. CONFIG.	€	VOLTAGE OPTIONS	CONF. CODE	€
230V 3~ 50/60Hz	0102-0031	-	Butane-Propane LPG	0101-0001	-
Marine 440V 3~ 50/60Hz	0102-0033	-	Town gas TG	0101-0002	-
230V 1N 60Hz	0102-0037	-			
230V 2~ 50Hz	0102-0038	-			
230V 2~ 60Hz	0102-0039	-			

## Accessories 102

EXTRACTION	MODEL	DESCRIPTION	CODE	€			
	Kit CTG-12*	Flue gas discharge stack 102 * For gas ovens only	19095590	-			
STANDS	MODEL	RACKS ( SPACING)	WHEELS	DOORS	HEIGHT (mm)	CODE	€
	SH-21-65	-	-	-	650	19084190	-
	SH-21-65 R	-	x	-	650	19084191	-
	SH-21-65 B	6 GN1/1 + 6 GN2/1 (68mm)	-	-	650	19083224	-
	SH-21-65 BR	6 GN1/1 + 6 GN2/1 (68mm)	x	-	650	19084192	-
	SH-21-65 BCP	6 GN1/1 + 6 GN2/1 (68mm)	-	x	650	19082394	-
	SH-21-85	-	-	-	850	19103382	-
	SH-21-85 R	-	x	-	850	19103383	-
	SH-21-85 B	6 GN1/1 + 6 GN2/1 (68mm)	-	-	850	19103384	-
	SH-21-85 BR	6 GN1/1 + 6 GN2/1 (68mm)	x	-	850	19103385	-
STRUCTURES	MODEL	RACKS ( SPACING)	CODE	€			
	EB-102*	Mobile rack for 10 GN2/1 trays (62mm)	19011562	-			
	EP-102*	Mobile rack for 52 plates Ø31 (75mm) * GE-21 and CP-21(-R) required	19013356	-			
TROLLEYS	MODEL	DESCRIPTION	CODE	€			
	GE-21	Structure rack for EB-102 and EP-102	19011570	-			
	CP-21	Structure support trolley for oven on SH-21	19013355	-			
	CP-21-R	Adjustable structure support trolley for oven on SH-21	19018751	-			
PLINTH	MODEL	DESCRIPTION	CODE	€			
	Kit Z-21	Plinth kit	19087306	-			

x Included - Not included

For more accessories, check 'other accessories' chapter

## CONCEPT

## iKORE 201

## PureSteam or DirectSteam



General information		Version	
FIELD	DATA	ELECTRIC (E)	NATURAL GAS (G)
Capacity (standard)	Racks and tray type of trolley (T)*	20 GN1/1	20 GN1/1
	Spacing between rack rails	63mm	63mm
Energy supply (standard)	Electric / gas power	37,2 kW	1,55 kW / 36 kW
	Frecuency	50/60 Hz	50 Hz
	Voltage	380-415V 3N	230V 1N
Dimensions and weight	Width	935mm	935mm
	Depth (with handle)	966mm (1032mm)	966mm (1032mm)
	Height (with hinge)	1840mm (1871mm)	1840mm (1871mm)
	Net weight (gross)	~272,5Kg (331,5Kg)	~309Kg (341,5Kg)

Codes and prices							
HUMIDITY	WASHING	SHOWER	MODEL	CODE	€	CODE	€
PureSteam boiler	Solid iWash	●	CPW-201-(E/G) R SW T	19078184	-	19088259	-
		-	CPW-201-(E/G) R SW T	19107458	-	19107459	-
	Spray mode	●	CP-201-(E/G) R S T	19096899	-	19096901	-
		-	CP-201-(E/G) R T	19098466	-	19107457	-
DirectSteam injection	Solid iWash	●	CW-201-(E/G) R SW S T	19107462	-	19107463	-
		-	CW-201-(E/G) R SW T	19079085	-	19091665	-
	Spray mode	●	C-201-(E/G) R S T	19107460	-	19107461	-
		-	C-201-(E/G) R T	19079327	-	19088257	-

Configurable options				
OPTION	NAMING	DESCRIPTION	CONF. CODE	€
Washing	LW*	Liquid iWash *Only available for models with W	0107-0001	-
Trolley	Special T	Consult for other trolley configurations	-	Consult

VOLTAGE OPTIONS	CONF. CODE	€
230V 3~ 50/60Hz	0102-0041	-
Marine 440V 3~ 50/60Hz	0102-0043	-
230V 1N 60Hz	0102-0047	-
230V 2~ 50Hz	0102-0048	-
230V 2~ 60Hz	0102-0049	-

GAS OPTIONS	CONF. CODE	€
Butane-Propane LPG	0101-0001	-
Town gas TG	0101-0002	-

## Accessories 201

EXTRACTION	MODEL	DESCRIPTION	CODE	€
	Kit CTG-21*	Flue gas discharge stack for 201 *For gas ovens only	19095591	-
TROLLEYS	MODEL	RACKS (SPACING)	CODE	€
	CEB-201	20 GN1/1 (63mm)	19011551	-
	CEB-201-69	18 GN1/1 (69mm)	19103883	-
	CEB-201-80	16 GN1/1 (80mm)	19107454	-
	CEB-201-85	15 GN1/1 (85mm)	19107590	-
	CEP-201	50 plates Ø31 (75mm)	19013357	-
RAMP	MODEL	DESCRIPTION	CODE	€
	RH-201	Levelling ramp for 201 trolley	19044716	-
FASTENING KIT	MODEL	DESCRIPTION	CODE	€
	Kit A-20	Floor fastening kit for 201 ovens	19012270	-
KIT HANDLE	MODEL	DESCRIPTION	CODE	€
	Kit ASA	Side support kit for trolley handle	19087163	-

x Included - Not included



For more accessories, check 'other accessories' chapter





## CONCEPT

## iKORE 202

## PureSteam or DirectSteam




General information		Version	
FIELD	DATA	 ELECTRIC (E)	 NATURAL GAS (G)
Capacity (standard)	Racks and tray type of trolley (T)*	20 GN2/1 (40 GN1/1)	20 GN2/1 (40 GN1/1)
	Spacing between rack rails	63mm	63mm
Energy supply (standard)	Electric / gas power	67,2 kW	1,55 kW / 65 kW
	Frecuency	50/60 Hz	50 Hz
	Voltage	380-415V 3N	230V 1N
Dimensions and weight	Width	1165mm	1165mm
	Depth (with handle)	1074mm (1140mm)	1074mm (1140mm)
	Height (with hinge)	1840mm (1871mm)	1840mm (1871mm)
	Net weight (gross)	~338Kg (403,5Kg)	~357Kg (422,5Kg)

Codes and prices						
HUMIDITY	WASHING	SHOWER	MODEL	 CODE	€	 CODE €
 PureSteam boiler	Solid iWash	•	CPW-202-(E/G) R SW S T	19075005	-	19088276 -
		-	CPW-202-(E/G) R SW T	19107465	-	19107466 -
	Spray mode	•	CP-202-(E/G) R S T	19096903	-	19096905 -
		-	CP-202-(E/G) R T	19098472	-	19107464 -
 DirectSteam injection	Solid iWash	•	CW-202-(E/G) R SW S T	19107469	-	19107480 -
		-	CW-202-(E/G) R SW T	19078517	-	19091669 -
	Spray mode	•	C-202-(E/G) R S T	19107467	-	19107468 -
		-	C-202-(E/G) R T	19078544	-	19088274 -

Configurable options				
OPTION	NAMING	DESCRIPTION	CONF. CODE	€
Washing	LW*	Liquid iWash *Only available for models with W	0107-0001	-
Trolley	Special T	Consult for other trolley configurations	-	consult

VOLTAGE OPTIONS	CONF. CODE	€	GAS OPTIONS	CONF. CODE	€
 230V 3~ 50/60Hz	0102-0051	-	Butane-Propane LPG	0101-0001	-
 Marine 440V 3~ 50/60Hz	0102-0053	-	Town gas TG	0101-0002	-
 230V 1N 60Hz	0102-0057	-			
 230V 2~ 50Hz	0102-0058	-			
 230V 2~ 60Hz	0102-0059	-			

## Accessories 202

EXTRACTION	MODEL	DESCRIPTION	CODE	€
	 Kit CTG-22*	Flue gas discharge stack for 202 *For gas ovens only	19095592	-
TROLLEYS	MODEL	RACKS (SPACING)	CODE	€
	CEB-202	20 GN2/1 (63mm)	19011550	-
	CEB-202-69	18 GN2/1 (69mm)	19103884	-
	CEB-202-80	16 GN2/1 (80mm)	19107481	-
	CEB-202-85	15 GN2/1 (85mm)	19107588	-
	CEP-202- 90	90 plates Ø31 (75mm)	19081933	-
	CEP-202	100 plates Ø31 (75mm)	19011552	-
RAMP	MODEL	DESCRIPTION	CODE	€
	RH-202	Levelling ramp for 202 trolley	19034438	-
FASTENING KIT	MODEL	DESCRIPTION	CODE	€
	Kit A-20	Floor fastening kit for 202 ovens	19012270	-
KIT HANDLE	MODEL	DESCRIPTION	CODE	€
	Kit ASA	Side support kit for trolley handle	19087163	-

x Included - Not included

For more accessories, check 'other accessories' chapter

# Vacuum packers



## General characteristics

### Construction:

- AISI 304
- Busch pumps
- 2 units of high-quality polycarbonate fill sheets
- Protection against water
- Cable-free sealing bars with pneumatic pistons

### Control:

- High-precision microprocessor which controls the vacuum percentage of the chamber
- Digital control panel with display included
- Alarms for set vacuum level and oil change
- Visualisation of the complete machine cycles
- Oil level viewer.

### Functions and programmes:

- Automatic start of the vacuum cycle
- Piston with dual position (operating and idle)
- Easily programmable memory for 10 programmes
- Possibility of performing additional 60" vacuum
- Possibility of packaging liquids
- H2Oout programme to dehumidify the pump
- Programme for external packing both in bags and containers
- The G models make it possible to package delicate or soft products.

### Tabletop vacuum packing

POSITION OF SEALING BAR	MODEL	CODE	BAR LENGTH (mm)	PUMP CAPACITY (m3/h9)	CHAMBER (mm)	POWER (kW)	DIMENSIONS (mm)	€
	SVS-1-310/8	19107730	310	8	332 x 335 x 170	600	395 x 490 x 374	-
	SVS-1-310/8 G	19107731	310	8	332 x 335 x 170	600	395 x 490 x 374	-
	SVS-1-410/10	19107732	410	10	441 x 449 x 170	750	535 x 591 x 438	-
	SVS-1-410/10 G	19107733	410	10	441 x 449 x 170	1000	535 x 591 x 438	-
	SVS-1-410/20	19107734	410	20	441 x 449 x 170	1000	535 x 591 x 438	-
	SVS-1-410/20 G	19107735	410	20	441 x 449 x 170	1000	535 x 591 x 438	-
	SVS-2-410/20	19107736	410 + 410	20	441 x 449 x 170	1000	535 x 591 x 438	-
	SVS-2-410/20 G	19107737	410 + 410	20	441 x 449 x 170	1000	535 x 591 x 438	-

### Floor-standing vacuum packing

*POSITION OF SEALING BAR	MODEL	CODE	BAR LENGTH (mm)	PUMP CAPACITY (m3/h9)	CHAMBER (mm)	POTENCIA (kW)	DIMENSIONES (mm)	€
	SVP-2-455/25	19107738	455 + 455	25	485 x 550 x 175	1200	600 x 710 x 1035	-
	SVP-2-455/25 G	19107740	455 + 455	25	485 x 550 x 175	1200	600 x 710 x 1035	-
	SVP-2-620/63	19107745	620 + 620	63	650 x 535 x 200	1500	765 x 710 x 1050	-
	SVP-2-620/63 G	19107746	620 + 620	63	650 x 535 x 200	1500	765 x 710 x 1050	-
	SVP-2-950/100	19107751	950 + 950	100	980 x 585 x 230	2500	1100 x 800 x 1070	-
	SVP-2-950/100 G	19107752	950 + 950	100	980 x 585 x 230	2500	1100 x 800 x 1070	-
	SVP-2-520/25	19107741	520 + 520	25	485 x 550 x 175	1200	600 x 710 x 1035	-
	SVP-2-520/25 G	19107742	520 + 520	25	485 x 550 x 175	1200	600 x 710 x 1035	-
	SVP-2-505/63	19107743	505 + 505	63	650 x 535 x 200	1500	765 x 710 x 1050	-
	SVP-2-505/63 G	19107744	505 + 505	63	650 x 535 x 200	1500	765 x 710 x 1050	-
	SVP-2-560/100	19107747	560 + 560	100	980 x 585 x 230	2500	1100 x 800 x 1070	-
	SVP-2-560/100 G	19107750	560 + 560	100	980 x 585 x 230	2500	1100 x 800 x 1070	-

G: Models with inert gas inlet

## Accessories for vacuum packaging machines

### Trolleys for tabletop models

CODE	SUITABLE FOR MODELS	DESCRIPTION	€
19076888	SVS-1-310/8	Trolley with 4 wheels 590x550x610h mm	-
19076889	SVS-1-410/10 SVS-1-410/20	Trolley with 4 wheels 690x730x610h mm	-

### Tilted flat shelves for packaging liquids

CODE	SUITABLE FOR MODELS	DESCRIPTION	€
19076890	SVS-1-310/8	Stainless steel tilted flat shelf for packaging liquids	-
19076891	SVS-1-410/10 SVS-1-410/20	Stainless steel tilted flat shelf for packaging liquids	-
19076892	SVP-2-520/25	Stainless steel tilted flat shelf for packaging liquids	-
19076893	SVP-2-620/63	Stainless steel tilted flat shelf for packaging liquids	-
19076897		Stainless steel filter for liquids	-

### Suction tube for emptying into containers

CODE	DESCRIPTION	€
19076894	Suction tube for emptying into external containers	-

### SYV valve for core temperature probe

CODE	DESCRIPTION	€
19076895	Core temperature probe for vacuum cooking inox.	-
19076896	Set of valve seals (10 pieces)	-

# Stacking solutions



### General characteristics

- The kits for ovens in column are composed of a set of parts which allows the ovens to be positioned one above another
- This type of assembly is carried out with 1/1 tray ovens, from any of the three electric ranges.
- The codes of the two ovens must be specified when placing the order, as well as the code of the kit of parts to carry out the assembly in column
- **Fagor Professional supplies the column of ovens ready assembled and finished from the factory.**

MODEL	DESCRIPTION	CODE	€
K-61-61	Stacking kit for 2 iKORE Kompact 061 ovens.	19107453	-
K-61-101	Stacking kit for 1 iKORE Kompact 061 oven + 1 iKORE Kompact 101 oven	19107452	-
61-61 R	Stacking kit for 2 ovens iKORE 061 right door	19087274	-
61-61 L	Stacking kit for 2 ovens iKORE 061 left door	19087275	-
61-101 R	Stacking kit for 1 oven iKORE 061 + 1 oven iKORE 101 right door	19087272	-
61-101 L	Stacking kit for 1 iKORE 061 oven + 1 oven iKORE 101 left door	19087273	-
62-62 R	Stacking kit for 2 ovens iKORE 062 right door	19087551	-
62-62 L	Stacking kit for 2 ovens iKORE 062 left door	19088030	-
62-102 R	Stacking kit for 1 iKORE 062 oven + 1 oven iKORE 102 right door	19088031	-
62-102 L	Stacking kit for 1 iKORE 062 oven + 1 oven iKORE 102 left door	19088032	-


\* Only available for electric ovens

# Cook&Chill solutions



### General characteristics

- Kit of elements to make a stacking system "Cook & Chill" with an oven and a blast chiller or freezer.
- When ordering a "Cook & Chill" column, the oven code, the chiller code and the code of the corresponding kit of elements for column assembly, or the corresponding code for the most common assemblies, must be specified.
- **Fagor Professional supplies the column of ovens ready assembled and finished from the factory.**



MODEL	DESCRIPTION	CODE	€
KIT C&C-0623	Cook&Chill assembly kit for iKORE 0623 oven + ABCO 0623 blast chiller	19087772	-
KIT C&C-061	Cook&Chill assembly kit for iKORE 061 oven + ABCO 061 blast chiller	19088139	-
KIT C&C-061 G	Cook&Chill assembly kit for iKORE 061 gas oven with boiler + ABCO 061 blast chiller	19095521	-



### The importance of using blast chillers

Blast chillers are machines designed to quickly lower the temperature of food from 90°C after cooking to a refrigeration temperature of +3°C in no more than 90 minutes, thus preventing bacteria from multiplying.


Our different ranges of mixed blast chillers, with built-in freezing cycle, can lower the temperature of the product to -18 °C in a time of 4 hours, thus achieving a very fast freezing of the food, avoiding, in addition to the increase in bacterial flora, the formation of macrocrystals.

# Our Cook&Chill selection

The combined use of ovens and blast chillers allows you to be more efficient, as it makes it easier for you to programme your work in the kitchen.



The correct use of blast chillers with combi ovens results in less waste, time savings and a product that is served at the right time.

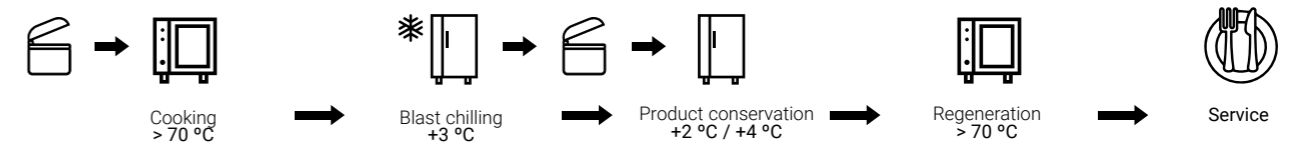

**Cook & Chill 0623**  
30-60 meals per day



Oven + Blast chiller		
MODEL	CODE	€
APW-0623-E R S SW K	19079298	-
Kit C&C-0623	19087772	-
ABCO-06 2/3 50Hz	19087540	-
<b>C&amp;C 0623 Solution</b>		-

**Cook & Chill 061**  
50-100 meals per day



Oven + Blast chiller		
MODEL	CODE	€
APW-061-E R S SW K	19078616	-
Kit C&C-061	19088139	-
ABCO-061 50Hz	19105609	-
<b>C&amp;C 061 Solution</b>		-

**Cook & Chill 101**  
80-150 meals per day



Oven + Stand + Blast chiller		
MODEL	CODE	€
APW-101-E R S SW K	19078668	-
SH-11-65 BCP	19079211	-
ABCO-101 50Hz	19105605	-
<b>C&amp;C 101 Solution</b>		-

**Cook & Chill 102**  
150-250 meals per day



Oven + Stand + Blast chiller		
MODEL	CODE	€
APW-102-E R S SW K	19079785	-
SH-21-65 BCP	19082394	-
ABCO-102 50Hz	19091443	-
<b>C&amp;C 102 Solution singular</b>		-

**Cook & Chill 201**  
150-250 meals per day



Oven + Roll in blast chillers		
MODEL	CODE	€
APW-201-E R S SW T K	19079328	-
RBP-201	19089779	-
<b>C&amp;C 201 Solution singular</b>		-

**Cook & Chill 202**  
200-400 meals per day



Oven + Roll in blast chillers		
MODEL	CODE	€
APW-202-E R S SW T K	19078839	-
RBM-202	19089790	-
<b>C&amp;C 202 Solution singular</b>		-

· Complete your ideal solution with our packaging machines and oven accessories: hoods, trolleys and frames, trays...

· See more blast chiller models in the refrigeration section.

(\*) Without condensing unit.


· Complete your ideal solution with our packaging machines and oven accessories: hoods, trolleys and frames, trays...

· See more blast chiller models in the refrigeration section.


(\*) Without condensing unit.

## Cleaning accessories


### Solid wash SW

	MODEL	DESCRIPTION	CODE	€
	BUCKET OF DETERGENT TABLETS	Bucket of detergent tablets, 75 units	19086761	-
	BUCKET OF RINSE AID TABLETS	Bucket of rinse aid tablets, 75 units	19086763	-
	AB BOOST	Powder detergent- 8kg drum	19086764	-


### Liquid wash LW

	MODEL	DESCRIPTION	CODE	€
	LIQUID DET. 10L	Liquid detergent 10L	19086053	-
	LIQUID R. AID 10L	Liquid rinse aid 10L	19086054	-

### Basic wash - Spray mode


	MODEL	DESCRIPTION	CODE	€
	KOI PLUS	Degreaser- 6kg bottle	19086765	-

### Externa shower

	MODEL	DESCRIPTION	CODE	€
	Shower kit	External shower kit	19004504	-

## Kits (various)

### Double lock

	MODEL	DESCRIPTION	CODE	€
	Kit DC	Double locking anchor kit to open the ovens door in two steps	19069736	-

### Fair kits

	MODEL	DESCRIPTION	CODE	€
	KIT FERIA ADVANCE	ADVANCE dummy hand control kit for trade fairs	19095582	-
	KIT FERIA CONCEPT	CONCEPT dummy hand control kit for trade fairs	19095583	-

### Back-up battery


	MODEL	DESCRIPTION	CODE	€
	Back-up kit	back-up battery kit	19084561	-

### Transformation kits (gas)


	MODEL	DESCRIPTION	CODE	€
	Kit HU-061	Gas transformation kit G25,1 for iKORE 061	19103095	-
	Kit HU-101	Gas transformation kit G25,1 for iKORE 101	19103096	-
	Kit HU-102	Gas transformation kit G25,1 for iKORE 102	19103097	-
	Kit HU-201	Gas transformation kit G25,1 for iKORE 201	19103098	-
	Kit HU-202	Gas transformation kit G25,1 for iKORE 202	19103099	-

## Racks and trolleys BAKE 60/40

### Pastry / bakery frames 600x400mm


RACK	MODEL	DESCRIPTION	OVEN	CODE	€
	GP-061	Rack kit for 5 BAKE 60/40 trays (spacing between rack rails = 85mm)	iKORE 061	19011982	-
	GP-101	Rack kit for 8 BAKE 60/40 trays (spacing between rack rails = 85mm)	iKORE 101	19011983	-
	GP-062	Rack kit for 5 BAKE 60/80 trays (spacing between rack rails = 85mm)	iKORE 062	19095570	-
	GP-102	Rack kit for 8 BAKE 60/80 trays (spacing between rack rails = 85mm)	iKORE 102	19012134	-

### Pastry / bakery trolleys 600x400mm


CARROS	MODEL	DESCRIPTION	OVEN	CODE	€
	CBK-15	Trolley for 15 BAKE 60/40 trays (spacing between rack rails = 85mm)	iKORE 201	19107596	-
	CBK-16	Trolley for 16 BAKE 60/40 trays (spacing between rack rails = 85mm)	iKORE 201	19107668	-
	CBK-30	Trolley for 15 BAKE 60/80 trays (spacing between rack rails = 85mm)	iKORE 202	19107620	-
	CBK-32	Trolley for 16 BAKE 60/80 trays (spacing between rack rails = 85mm)	iKORE 202	19107669	-

## Cooking accessories

### Smoker

	MODEL	POWER (W)	VOLTAGE	HZ	DIMENSIONS (mm)	CODE	€
	SMOKER	250	230V 1N	50/60	95 x 268 x 54	19059112	

### Additional external probe


	MODEL	DESCRIPTION	CODE	€
	Kit SV*	SousVide external temperature control probe kit for vacuum cooking	19059112	
	Kit ST*	External single point temperature control probe kit.	19087746	
	Kit SS	External support for ST and SV probes	19107627	

\***ADVANCE**: possibility of working with an internal probe and up to 2 external probes at the same time (total 3 probes working at the same time) Multitray  
 \***CONCEPT**: possibility of working with an internal or external probe (1 single probe working).






# Gastronorm trays (GN)


## Grid - AISI-304 1mm (EN631)

	MODEL	CAPACITY	DIMENSIONS (WxL)	DEPTH (mm)	CODE	€
	GRID 2/3	-	GN-2/3 (325x354 mm)	-	19058664	-
	GRID 1/1	-	GN-1/1 (325x530 mm)	-	19085067	-
	GRID 2/1	-	GN-2/1 (650x530 mm)	-	19085068	-


## Grills and grease trays

	MODEL	CAPACITY	DIMENSIONS (WxL)	DEPTH (mm)	CODE	€
	PO 1/1-8	8 chickens	GN-1/1 (325x530 mm)	-	19001496	-
	CO 1/1	Ribs	GN-1/1 (325x530 mm)	-	19000545	-
	BRG 1/1	5l	GN-1/1 (325x530 mm)	-	19107594	-
	BRG 2/1	10l	GN-2/1 (650x530 mm)	-	19107615	-


## Flat trays

	MODEL	CAPACITY (l)	DIMENSIONS (WxL)	DEPTH (mm)	CODE	€
	GN 2/3-20	1,70	GN-2/3 (325x354 mm)	20	19058658	-
	GN 2/3-40	3,2	GN-2/3 (325x354 mm)	40	19058659	-
	GN 1/1-20	2,50	GN-1/1 (325x530 mm)	20	19001669	-
	GN 1/1-40	5,50	GN-1/1 (325x530 mm)	40	19048493	-
	GN 1/1-65	9,50	GN-1/1 (325x530 mm)	65	19048494	-
	GN 1/1-100	14,00	GN-1/1 (325x530 mm)	100	19048495	-
	GN 2/1-20	3,00	GN-2/1 (650x530 mm)	20	19001673	-
	GN 2/1-40	10,50	GN-2/1 (650x530 mm)	40	19001674	-
	GN 2/1-65	18,50	GN-2/1 (650x530 mm)	65	19001675	-
	GN 2/1-100	28,00	GN-2/1 (650x530 mm)	100	19001672	-




## Perforated trays

	MODEL	CAPACITY (l)	DIMENSIONS (WxL)	DEPTH (mm)	CODE	€
	GNP 2/3-20	1,7	GN-2/3 (325x354 mm)	20	19058660	-
	GNP 2/3-40	3,2	GN-2/3 (325x354 mm)	40	19058661	-
	GNP 1/1-40	5,5	GN-1/1 (325x530 mm)	40	19001677	-
	GNP 1/1-65	9,5	GN-1/1 (325x530 mm)	65	19048496	-
	GNP 1/1-100	14	GN-1/1 (325x530 mm)	100	19001676	-
	GNP 2/1-40	10,5	GN-2/1 (650x530 mm)	40	19001680	-
	GNP 2/1-65	18,5	GN-2/1 (650x530 mm)	65	19001681	-
	GNP 2/1-100	28	GN-2/1 (650x530 mm)	100	19001679	-


## Granite trays

	MODEL	CAPACITY (l)	DIMENSIONS (WxL)	DEPTH (mm)	CODE	€
	TP 2/3-20	1,7	GN-2/3 (325x354 mm)	20	19058663	-
	TP 2/3-40	3,2	GN-1/1 (325x530 mm)	40	19059569	-
	TP 1/1-20	2,5	GN-1/1 (325x530 mm)	20	19001978	-
	TP 1/1-40	5,5	GN-1/1 (325x530 mm)	40	19001979	-
	TP 1/1-65	9,5	GN-1/1 (325x530 mm)	65	19001980	-
	TP 2/1-20	3,5	GN-2/1 (650x530 mm)	20	19001981	-
	TP 2/1-40	10,5	GN-2/1 (650x530 mm)	40	19001982	-
	TP 2/1-65	18,50	GN-2/1 (650x530 mm)	65	19001983	-


## Pastry trays

	MODEL	CAPACITY	DIMENSIONS (WxL)	DEPTH (mm)	CODE	€
	BPA 2/3 Flat	-	GN-2/3 (325x354 mm)	-	19058657	-
	BPA 1/1 Flat	-	GN-1/1 (325x530 mm)	-	19000313	-
	BPP 2/3 Perforated	-	GN-2/3 (325x354 mm)	-	19058656	-
	BPP 1/1 Perforated	-	GN-1/1 (325x530 mm)	-	19000314	-
	BB 1/1 Baguettes	4 cavities	GN-1/1 (325x530 mm)	-	19107820	-
	BB 60/40 Baguettes	5 cavities	BAKE 60/40 (600x400)	-	19107822	-



## Mould trays

	MODEL	CAPACITY	DIMENSIONS (WxL)	DEPTH (mm)	CODE	€
	MT 2/3 6	6 cavities	GN-2/3 (325x354 mm)	10 Ø x 15H	19107800	-
	MT 1/1 11	11 cavities	GN-1/1 (325x530 mm)	10 Ø x 15H	19107811	-

## Frying trays

	MODEL	CAPACITY	DIMENSIONS (WxL)	DEPTH (mm)	CODE	€
	FRI 2/3	-	GN-2/3 (325x354 mm)	40	19058655	-
	FRI 1/1	-	GN-1/1 (325x530 mm)	40	19012415	-

## Griddle grids to roast or mark

	MODEL	CAPACITY	DIMENSIONS (WxL)	DEPTH (mm)	CODE	€
	MG 2/3	-	GN-2/3 (325x354 mm)	-	19058654	-
	MG 1/1	-	GN-1/1 (325x530 mm)	-	19001460	-
	GRILL 1/1	-	GN-1/1 (325x530 mm)	(Perforated)	19002844	-
	FG 2/3	-	GN-2/3 (325x354 mm)	-	19059568	-
	FG 1/1	-	GN-1/1 (325x530 mm)	-	19076583	-