



PROFESSIONAL LAUNDRY

PROFESSIONAL DRYERS CONCEPT / ECONOMIC LINE SRP-08/10 M / SCP-10 M



CHARACTERISTICS

OUTSTANDING FEATURES

- M PROGRAMMER: selection of time and temperature, user friendly and versatile (OPL or coin laundry version).
- Reduced drying times (less than 45 minutes).
- 6,75 kw heating, option 4,5 kW (4,5 kW in SCP).

VERSATILITY

- OPL <> COIN
Standard models can be programmed as OPL or coin laundry version, central pay, etc.
- SINGLE <> STACKED
Models can be stacked on top of a washer or on another dryer. Control panels can be assembled between both drums for better ergonomics (except SCP Model).
- Ideal for multiple solutions: hotels, hostels, campings, coin laundries, facility services (mops), gyms, etc.

EFFICIENCY

- Optimised airflow.
- Wide fluff filter as drawer.
- Efficient design.

ROBUSTNESS

- Outer casing in grey skinplate (White lacquered in SCP model).
- Robust aluminium big door
- Drawer as fluff filter (not in the door but as an specific drawer).
- Industrial fan and powerful airflow.
- Sturdy construction of the dryer structure and panels.

OTHERS

- Galvanized drum.
- FULL SCREEN FILTER: drawer fluff filter, not in the door.
- SCP model available in two versions: three-phase model or single-phase model (not convertible).
- New gas heated models.
- CE approved product.


OPTIONS

- Skirting for better ergonomics skinplate (not available SCP).
- Skirting for better ergonomics in stainless steel (not available SCP).
- Drum in stainless steel AISI 304 (not available SCP).
- Stainless steel outer cabinet (except SCP model).
- Counter door opening (not available SCP)
- Bottom control panel (stacked dryer, except SCP model).
- Order complete container + compact packaging.
- Marine voltage 440V III 50/60 Hz Without neutral.
- Coin/token kit.

TECHNICAL DATA

PROFESSIONAL DRYERS | CONCEPT / ECONOMIC LINE | SRP-08/10 M / SCP-10 M

	U.	SRP-08 M		SRP-10M / SCP -10 M	
CAPACITY & DRUM					
Capacity 1:20	Kg	8		10	
	Lb	17,6		22	
Volume	l	160		200	
	ft	5,65		7,06	
Drum diameter Ø	mm	590		590	
	inch	23,23		23,23	
Drum depth	mm	585		690	
	inch	23,03		27,17	
DOOR					
Height center door	mm	554		554	
	inch	21,81		21,81	
Height base door	mm	320		320	
	inch	12,6		12,6	
Door diameter	mm	480		480	
	inch	18,9		18,9	
GENERAL DETAILS					
M control	-	Yes		Yes	
USB connection	-	No		No	
Construction	-	Skinplate		Skinplate / White lacquered	
Plinth	-	Opt		Opt / No	
Coin laundry version	-	Yes		Yes	
Noise level	dB	62		62	
POWER					
Motor	kW	0,37		0,37	
Electric heating	kW	6,75 / 4,5		6,75 / 4,5 // (SCP -10 4,5)	
Gas heating	kW	6,7		6,7	
CONNECTIONS		ELECTRIC	GAS/STEAM	ELECTRIC	GAS/STEAM
Tension 230V I+N+T 50Hz / 60Hz	Nº x mm2/A	3 x 10 / 40A	3 x 1,5 / 10A	3 x 10 / 40A	3 x 1,5 / 10A
Tension 230V III+T 50Hz / 60Hz	Nº x mm2/A	4 x 4 / 25A	3 x 1,5 / 10A	4 x 4 / 25A	3 x 1,5 / 10A
Tension 400V III+N+T 50Hz / 60 Hz	Nº x mm2/A	5 x 2,5 / 16A	3 x 1,5 / 10A	5 x 2,5 / 16A	3 x 1,5 / 10A
Fume exhaust Ø	mm	100		100	
Maximum airflow	m³/hour	300		300	
CONSUMPTIONS					
Electric heating	kW	6,75 / 4,5		6,75 / 4,5 // (SCP -10 4,5)	
Instantaneous propane gas consumption	Kg/h	0,57		0,57	
Instantaneous natural gas consumption	m³/h	0,71		0,71	
DIMENSIONS / PACKING DIMENSIONS					
Net width / Gross width	mm	680 / 710		680 / 710	
	inch	26,77 / 27,95		26,77 / 27,95	
Net depth / Gross depth	mm	722 / 832		775 / 832	
	inch	28,43 / 32,76		30,51 / 32,76	
Net height / Gross height	mm	1.056 / 1.141		1.056 / 1.141	
	inch	41,57 / 44,92		41,57 / 44,92	
Net weight / Gross weight	Kg	89 / 100,5		92,6 / 104,1	
	inch	196,21 / 221,56		204,15 / 229,5	

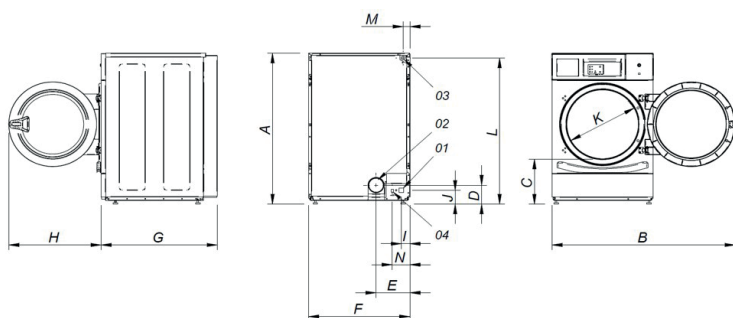

- 01. Electrical connection
- 02. Exhasust outlet Ø100
- 03. Gas inlet 1/2"
- 04. Ethernet connection

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
SRP-08	1.056	1.227	320	140	226	680	722	615	57	91	480	1.015	50	118
SRP/SCP-10	1.056	1.227	320	140	226	680	722	615	57	91	480	1.015	50	118