



PROFESSIONAL LAUNDRY



PROFESSIONAL WASHERS HIGH SPIN LAP-08/10 TP2

CHARACTERISTICS

OUTSTANDING FEATURES

- High G FACTOR of 450.
- User-friendly and totally programmable TP2 microprocessor with a 4,3" touch screen.
- 8 dosing signals as standard.
- 2 water inlets.
- Wet cleaning standard with the TP2.
- Short washing cycles (Heating Power 6 kW).

CONNECTIVITY

- IoT - FagorKonnnect standard.
- Management of laundries: OPL and COIN.
- Remote payment.

EFFICIENCY

- Water saving: automatic adjustment of water and chemicals.
- Optimal loading: manual indication of the loading weight.

VERSATILITY

- OPL < > COIN.
- ELECTRIC < > HOT WATER.
- PUMP < > DRAIN VALVE.
- SINGLE < > STACKED.
- USB Connection. Online platform free of charge for programming, telemetry, data analysis... thanks to the IoT.
- Wet cleaning features ready.
- Suitable for many sectors: restaurants, gyms, campings, mop cleaning, apartments, coin laundries, dry cleaners, nurseries...

ROBUSTNESS

- Outer casing in grey skinplate.
- Robust aluminium door.
- AISI-304 stainless steel inner/outer drum and ribs.
- No inner drum seal (muffle), easy to repair/clean.

- Industrial house bearing and bearings (Up to 20.000 working cycles) and possibility to replace bearings.
- Same motor and inverter as LA industrial washers.
- Industrial and heavy duty doorlock.

OTHERS

- Free standing washers. (leveling feet included).
- Detergent dispenser with 4 compartments.
- Frequency inverter to control imbalances.
- CE and WRAS approved product.

OPTIONS


- Dosing pump kit DQ-2.
- Extra dosage pump DB-1. Extra individual pumps.
- Double drain.
- Drain-pump kit.
- Silicon gasket.
- Reversible door opening.
- Tropicalized model: protected board.
- Top soapbox for HPW.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Normally closed drain valve.
- Plinth for better ergonomics.
- Plinth for mops, with filter (only valve models).
- Plinth for water recovery (tank included).
- Stainless steel AISI 304 outer casing.
- Auto unlock kit for the door (in case of power failure).
- Order in complete container + compact packing.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin/token kit.



TECHNICAL DATA

PROFESSIONAL WASHERS | HIGH SPIN | LAP-08/10 TP2

	U.	LAP-08 TP2 V		LAP-08 TP2 P		LAP-10 TP2 V		LAP-10 TP2 P	
DRUM									
Load capacity 1:9 / 1:10	Kg	9/8		9/8		11/10		11/10	
Volume	l	80		80		100		100	
Diameter	mm	532		532		532		532	
Depth	mm	360		360		425		425	
GENERAL DETAILS									
Washing speed / Spinning speed	r.p.m.	50/1.250		50/1.250		50/1.250		50/1.250	
G Factor	-	450		450		450		450	
Maximum force transmitted	KN	1,47 ± 0,53		1,47 ± 0,53		1,57 ± 0,53		1,57 ± 0,53	
Frequency-dynamic force	Hz	18,33		18,33		18,33		18,33	
Noise level	dB	<70		<70		<70		<70	
Coin laundry version	-	Opt		Opt		Opt		Opt	
Double drain	-	No		No		No		No	
Weighing / Tilting system	-	No/No		No/No		No/No		No/No	
SLUICE option	-	No		No		No		No	
DOOR									
Height center door / base door	mm	537/280		537/280		537/280		537/280	
Diameter	mm	373		373		373		373	
POWER									
Motor	kW	0,75		0,75		0,75		0,75	
Electric heating power	kW	6		6		6		6	
Total electric power (elec.)	kW	6,25		6,25		6,25		6,25	
Total electric power (hot water)	kW	0,75		0,75		0,75		0,75	
CONNECTIONS									
Tension 110V I+N+T	N° x mm2/A	-	3x1,5+T 16A	-	3x1,5+T 16A	-	2x1,5+T 16A	-	2x1,5+T 16A
Tension 230V I+N+T	N° x mm2/A	2x6+T 40A	2x1,5+T 16A	2x6+T 40A	2x1,5+T 16A	2x6+T 40A	2x1,5+T 16A	2x6+T 40A	2x1,5+T 16A
Tension 230V III+T	N° x mm2/A	3x2,5+T 20A	-	3x2,5+T 20A	-	3x2,5+T 20A	-	3x2,5+T 20A	-
Tension 400V III+N+T	N° x mm2/A	4x1,5+T 16A	-	4x1,5+T 16A	-	4x1,5+T 16A	-	4x1,5+T 16A	-
Water inlet	inch	3/4"		3/4"		3/4"		3/4"	
Main pressure	Kg/cm²	2-4		2-4		2-4		2-4	
Drain	mm/inch	2"				2"			
Drainage capacity	Lit/min	140		140		140		140	
NET DIMENSIONS / PACKING DIMENSIONS									
Net width / Gross width	mm	680/710		680/710		680/710		680/710	
Nwt depth / Gross depth	mm	698/832		698/832		742/832		742/832	
Net height / Gross height	mm	1.040/1.158		1.040/1.158		1.040/1.158		1.040/1.158	
Net weight / Gross weight	Kg	150/161		150/161		155/166		155/166	
Volume	m³	0,68		0,68		0,68		0,68	

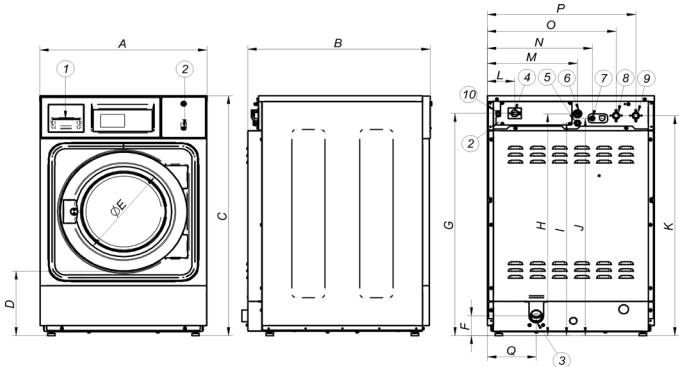

- 1. Soap dispenser
- 2. USB port
- 3. Drain
- 4. Main switch
- 5. Electric connection to liquid soap pumps
- 6. Electrical connection
- 7. Liquid soap connection
- 8. Cold water inlet
- 9. Hot water inlet
- 10. Ethernet port

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
LAP-08 TP2 V	680	698	1.040	278	373	86	964	962	922	942	954	110	366	427	524	603	199
LAP-08 TP2 P	680	698	1.040	278	373	86	964	962	922	942	954	110	366	427	524	603	199
LAP-10 TP2 V	680	742	1.040	278	373	86	964	962	922	942	954	110	366	427	524	603	199
LAP-10 TP2 P	680	742	1.040	278	373	86	964	962	922	942	954	110	366	427	524	603	199