



DRYING

HEAT PUMP DRYERS ADVANCE+ SR-11/14 TP2 PLUS HPi



CHARACTERISTICS

TP2

- 7" colour touch screen, programmable and easy to use.
- USB connection.
- FAGORKONNECT - Includes online platform for programming, telemetry, data analysis, via IoT, etc.
- On-screen videos: announcements, instructions (useful for self-service).
- 37 languages.

OUTSTANDING FEATURES

- FREQUENCY INVERTER - Standard inversion of rotation.
- STAINLESS DRUM - Stainless steel drum standard.
- Standard frequency inverter.

EFFICIENCY

- TOTAL FLOW - Axial-radial airflow system. Intelligent humidity sensor.
- EFFICIENT AIRFLOW - Large debris filter. Double glazing.
- Low energy consumption.

VERSATILITY

- Made to measure - customisation.
- WET CLEANING.
- OPL > Self-service - The standard OPL dryer can be converted to a self-service version.
- No need for an outside outlet.

CONNECTIVITY

- IoT FagorKonnnect standard.
- Laundry management: OPL and self-service.
- Remote payment (self-service).

ERGONOMICS

- Stainless steel filter drawer.
- Large door diameters.
- Door opening direction reversal.

MAINTENANCE

- Hinged panel: easy and ergonomic access.
- Technical menu: statistics, data retrieval for after-sales service, software updates, etc..


OTHER

- Grey skinplate cabinet, stainless steel effect.
- SOFT TOUCH - Drum with recessed perforations.
- COOL DOWN - Cooling at the end of the cycle.
- Filter with larger surface area and improved air flow.
- CE approved.


OPTIONS

- IoT - FagorKonnnect.
- Opposing door opening.
- Tropicalised model.
- Stainless steel cabinet.
- Stainless steel front panel.
- Wooden packaging.

	U.	SR-11 TP2 PLUS HPi	SR-14 TP2 PLUS HPi
CAPACITY			
Capacity 1/18	Kg	11,7	15
	Lb	25,7	33,1
Capacity 1/20	Kg	10,5	13,5
	Lb	23,1	29,8
DRUM			
Ø Drum	mm	750	750
	inch	29,5	29,5
Drum depth	mm	475	610
	inch	18,7	24
Drum volume	l	210	270
	cu ft	7,41	9,53
Ø Door (loading mouth)	mm	574	574
	inch	22,6	22,6
Height door centre	mm	976	976
	inch	38,4	38,4
Height door bottom	mm	618	618
	inch	24,33	24,33
Drum motor power	kW	0.37	0.37
ELECTRIC HEATING			
Installed heating power	kW	3	3
Installed electrical power	kW	3,82	3,82
Evaporation power	l/h	6,18	6,4
	USgallon/h	1,63	1,69
Hourly production	kg/h	12,3	12,86
	lb/h	27,12	28,35
VENTILATION			
Nominal air flow rate	m³/h	variable	variable
	cfm	variable	variable
Fan motor power	kW	0,17	0,17
HEAT EMISSION			
Max. total heat emission	kW	0,7	1
	Btu/h	2294	3441
Max. frontal heat emission	kW	0,4	0,6
	Btu/h	1434	2151
CONNECTIONS			
Voltage 400V - III + N + T	Nº x mm2 / A	3 x 4 / 32	3 x 4 / 32
Drain for laundry moisture extraction	BSPP ISO 228-1 o Tubo Ø/Long	12 / 2000	12 / 2000
DIMENSIONS / DIMENSIONS WITH PACKAGING			
Net width / Gross width	mm	785 / 865	785 / 865
	inch	30,9 / 34,1	30,9 / 34,1
Net depth / Gross depth	mm	1040 / 1125	1040 / 1125
	inch	40,9 / 44,3	40,9 / 44,3
Net height / Gross height	mm	1694 / 1840	1694 / 1840
	inch	66,7 / 72,4	66,7 / 72,4
Net weight / Gross weight	Kg	292 / 302	300 / 310
	Lb	644 / 666	661 / 683
OTHERS			
Noise level	dB	61	61

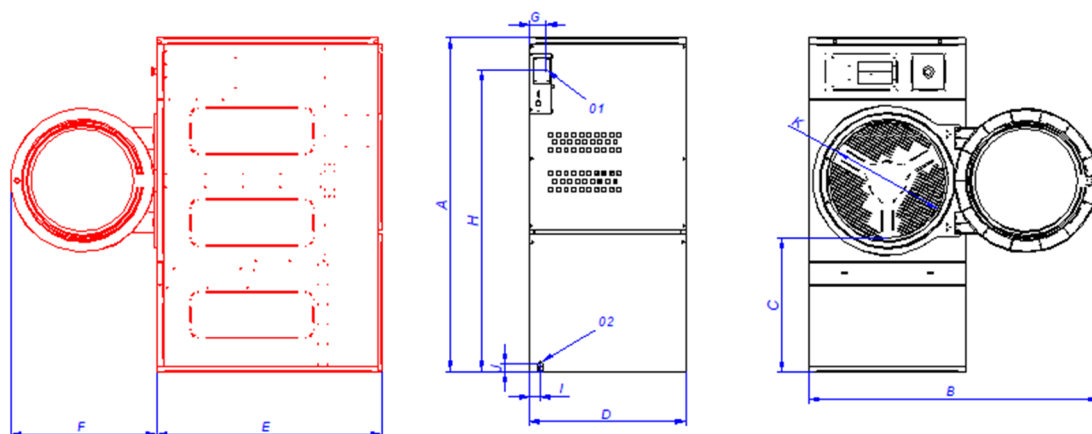

	A	B	C	D	E	F	G	H	I	J	K
SR-11 TP2 PLUS HPi	1694	1450	689	785	855	730	85	1530	55	90	574
SR-14 TP2 PLUS HPi	1694	1450	689	785	989	730	85	1530	55	90	574



DRYING

HEAT PUMP DRYERS ADVANCE+ SR-18/22 TP2 PLUS HPI



CHARACTERISTICS

TP2

- 7" colour touch screen, programmable and easy to use.
- USB connection.
- FAGORKONNECT - Includes online platform for programming, telemetry, data analysis, via IoT, etc.
- On-screen videos: announcements, instructions (useful for self-service).
- 37 languages.

OUTSTANDING FEATURES

- FREQUENCY INVERTER - Standard inversion of rotation.
- STAINLESS DRUM - Stainless steel drum standard.
- Standard frequency inverter.

EFFICIENCY

- TOTAL FLOW - Axial-radial airflow system. Intelligent humidity sensor.
- EFFICIENT AIRFLOW - Large debris filter. Double glazing.
- Low energy consumption.

VERSATILITY

- Made to measure - customisation.
- WET CLEANING.
- OPL > Self-service - The standard OPL dryer can be converted to a self-service version.
- No need for an outside outlet.

CONNECTIVITY

- IoT FagorKonnnect standard.
- Laundry management: OPL and self-service.
- Remote payment (self-service).

ERGONOMICS

- Stainless steel filter drawer.
- Large door diameters.
- Door opening direction reversal.

MAINTENANCE

- Hinged panel: easy and ergonomic access.
- Technical menu: statistics, data retrieval for after-sales service, software updates, etc..



OTHER

- Grey skinplate cabinet, stainless steel effect.
- SOFT TOUCH - Drum with recessed perforations.
- COOL DOWN - Cooling at the end of the cycle.
- Filter with larger surface area and improved air flow.
- CE approved.

OPTIONS

- IoT - FagorKonnnect.
- Opposing door opening.
- Tropicalised model.
- Stainless steel cabinet.
- Stainless steel front panel.
- Wooden packaging.

	U.	SR-18 TP2 PLUS HPi	SR-22 TP2 PLUS HPi
CAPACITY			
Capacity 1/18	Kg	18,3	24,3
	Lb	40,4	53,6
Capacity 1/20	Kg	16,5	21,9
	Lb	36,3	48,3
DRUM			
Ø Drum	mm	750	835
	inch	29,5	32,9
Drum depth	mm	746	800
	inch	29,4	31,5
Drum volume	l	330	440
	cu ft	11,64	15,54
Ø Door (loading mouth)	mm	574	574
	inch	22,6	22,6
Height door centre	mm	976	1030
	inch	38,4	40,6
Height door bottom	mm	618	672
	inch	24,33	26,46
Drum motor power	kW	0.37	0.37
ELECTRIC HEATING			
Installed heating power	kW	3	3
Installed electrical power	kW	3,82	3,82
Evaporation power	l/h	7,1	0,45
	USgallon/h	1,88	5812
Hourly production	kg/h	14,1	15
	lb/h	31,08	33,07
VENTILATION			
Nominal air flow rate	m³/h	variable	variable
	cfm	variable	variable
Fan motor power	kW	0,17	0,17
HEAT EMISSION			
Max. total heat emission	kW	1	1,3
	Btu/h	3441	4589
Max. frontal heat emission	kW	0,6	0,8
	Btu/h	2151	2868
CONNECTIONS			
Voltage 400V - III + N + T	Nº x mm2 / A	3 x 4 / 32	3 x 4 / 32
Drain for laundry moisture extraction	BSPPI50228-1 o Tubo Ø/Long	12 / 2000	12 / 2000
DIMENSIONS / DIMENSIONS WITH PACKAGING			
Net width / Gross width	mm	785 / 865	890 / 970
	inch	30,9 / 34,1	35 / 38,2
Net depth / Gross depth	mm	1125 / 1210	1255 / 1345
	inch	44,3 / 47,6	49,4 / 53
Net height / Gross height	mm	1694 / 1840	1812 / 1940
	inch	66,7 / 72,4	71,3 / 76,4
Net weight / Gross weight	Kg	307 / 320	330 / 350
	Lb	677 / 705	728 / 772
OTHERS			
Noise level	dB	61	61

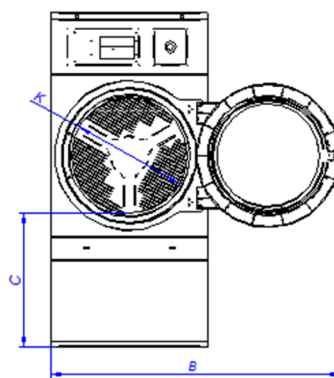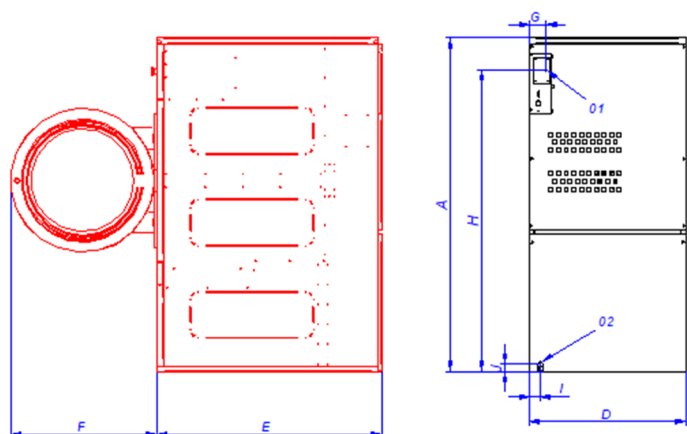

01 ELECTRICAL CONNECTION
02 CONDENSATE WATER EVACUATION
2000 MM HOSE (1) AND 12 MM INNER
DIAMETER
(1) FOR LONGER DISTANCES SEE INSTA-
LLATION MANUAL

	A	B	C	D	E	F	G	H	I	J	K
SR-18 TP2 PLUS HPi	1694	1450	689	785	1125	730	85	1530	55	90	574
SR-22 TP2 PLUS HPi	1812	1500	743	890	1255	730	90	1650	55	90	574