



DRYING

HEAT PUMP DRYERS ADVANCE SR-11/16/23 TP2 HP



CHARACTERISTICS

TP2

- User friendly and totally programmable TP2 with 7" coloured touch screen.
- USB Connection. PC software free of charge for programming, traceability, data analysis...
- Videos on display (ads, instructions, etc.)
- 37 languages

OUTSTANDING FEATURES

- Reversing drum action as standard
- Stainless steel drum as standard
- Frequency inverter as standard

EFFICIENCY

- MIXED FLOW - Mixed axial-radial airflow
- Big fluff filter

VERSATILITY

- Make to order - customisation
- WET CLEANING
- OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses

ERGONOMICS

- Drawer as fluff filter, made of stainless steel
- Biggest door diameters
- Opening sense of door adjustable on site

MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance

OTROS

- Grey skinplate outer casing, stainless steel look
- SOFT TOUCH - new drum with stamped holes
- COOL DOWN - anti-wrinkle at the end of the cycle
- No need of exhaust to the exterior
- Low energy consumption
- Water to refrigerate, which may be reused to wash
- CE approved

OPTIONS

- iDRY - Intelligent humidity control
- Double door glass
- Opposite door opening
- Tropicalized model
- New dosing/vaporizing system
- Back panel with air filter
- FagorKonnnect IoT - Communication kit
- Rear panel external air + filter
- Stainless steel outercasing
- Stainless steel frontal panel
- Maritime ooden packing
- Ship voltage: 440V III 50/60 Hz No neutral


TECHNICAL DATA

HEAT PUMP DRYERS | ADVANCE | SR-11/16/23 TP2 HP

TECHNICAL DATA	UNIT.	SR-11 TP2 HP	SR-16 TP2 HP	SR-23 TP2 HP
CAPACITY				
Capacity 1/20	Kg	12	18	26
Capacity 1/30	Kg	11	17	23
Hourly Output*	Kg/h	10	13	15
Evaporation capacity*	l/h	5,0	6,3	6,88
DRUM				
Ø Drum	mm	750	750	855
Drum length	mm	475	746	800
Drum volume	l	210	330	460
Ø Loading door	mm	574	574	574
POWER				
Drum motor power	kW	0,37	0,37	0,37
Fan motor power	kW	0,55	0,55	0,55
Electric heating power ALL RANGES	kW	3,8	3,8	3,8
Total electric power (elec.model) HP ADVANCE	kW	4,77	4,77	4,77
Energetic consumption	** kWh/ l	0,82	0,71	0,61
Nominal airflow	m3/h	1.200	1.200	1.200
CONNECTIONS		ELECTRICAL	ELECTRICAL	ELECTRICAL
Tension 400V - III + N + T (50 Hz)	Nº x mm2 / A	5 x 4 / 20	5 x 4 / 20	5 x 4 / 20
Heat pump inlet (Cooling)	BSP	1/2 "	1/2 "	1/2 "
Heat pump outlet (Cooling)	BSP	1/2 "	1/2 "	1/2 "
Drain	BSP	3/4 "	3/4 "	3/4 "
DIMENSIONS / PACKING DIMENSIONS				
Net width / Gross width	mm	785 / 865	785 / 865	890/970
Net Depth / Gross Depth	mm	1.255/ 1.380	1.525 / 1.650	1.590/1.720
Net Height / Gross Height	mm	1.694 / 1.840	1.694 / 1.840	1.812 / 1.940
Net weight / Gross weight	Kg	342 / 356	357/ 372	380/395
OTHERS				
Sound level	dB	64	64	64

* It may vary depending on the type of heating, filter cleanliness or extraction type

** kWh per litre of evaporated water

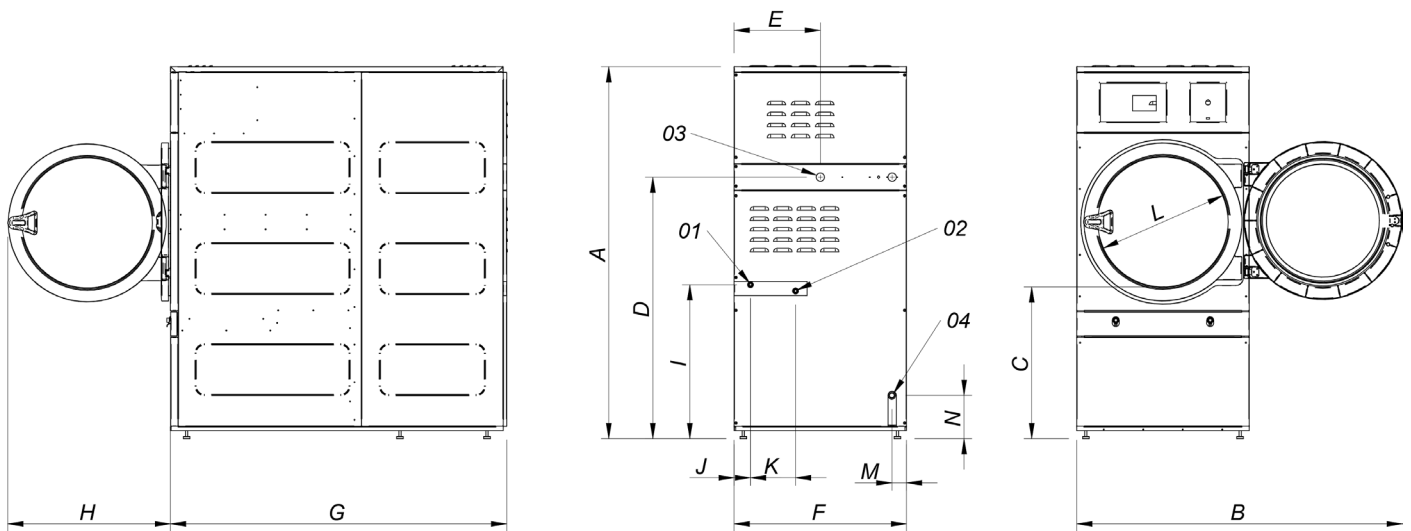

- 01 REFRIGERATION WATER INLET 1/2"
- 02 REFRIGERATION WATER OUTLET (HOT) 1/2"
- 03 ELECTRIC CONNECTION
- 04 DRAIN 3/4"

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
SR-11 TP2 HP	1694	1447	689	1190	392	785	1255	735	700	75	205	575	67	197
SR-16 TP2 HP	1694	1447	689	1190	392	785	1525	735	700	75	205	575	67	197
SR-23 TP2 HP	1812	1552	743	1190	445	890	1595	735	700	127	205	575	119	250