WASHING

—

NORMAL SPIN WASHERS
LOW AND MEDIUM CAPACITY
LN-11/14 TP2

CHARACTERISTICS

TP2
- User friendly and totally programmable 7".
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
- Videos on display (ads, instructions, etc.).
- 37 languages.
- 8 dosing signals as standard8 dosing.

G FACTOR
- High G-Factor of 200.

EFFICIENCY
- Intelligent consumption.
- Optimal loading.
- Low water consumption.

VERSATILITY
- Make to order: customisation.
- OPL < > COIN.
- Electric < > Hot water.
- Wet cleaning features.

CONNECTIVITY
- IoT - FagorKonnect.
- Remote technical service.
- Managemant of laundries: OPL and selfservice.
- Remote payment.

ERGONOMICS
- Biggest door diameters: Ø373.
- Easy opening/closing system for door lock.

MAINTENANCE
- Hinged control panel: easy and ergonomic access.
- Equivalent parts for all models: contactors, electronic devices,...
- Technical menu: telemetry, error diagnosis.

OTHERS
- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product Option ETL.

OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- SLUICE: model with 8mm drum holes.
- Anchoring base.
- External double drain 3".
- Normally closed valve.
- Water FULL FLOW: recirculation of bath water.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Silicone gasket.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin / token kit.
- Auto unlock kit for the door.

	U.	LN-11 TP2		LN-14 TP2	
DRUM					
Load capacity 1:9 / 1:10	Kg	11/10		14/13	
Volume	l	100		130	
Diameter	mm	620		620	
Depth	mm	330		430	
GENERAL DETAILS					
Washing speed/ Spinning speed	r.p.m.	53/759		53/759	
Factor G	-	200		200	
Maximum force transmitted	KN	2,0 ±3		2,31 ±4	
Frequency-dynamic force	Hz	8,93		8,93	
Noise level	dB	<70		<70	
Coin laundry version	-	Yes		Yes	
Double drain	-	No		Opt.	
Weighing system / Tilting system	-	No		No	
SLUICE option	-	Yes		Yes	
DOOR					
Height center door/ Height door	mm	570/310		570/310	
Diameter	mm	373		373	
POWER					
Motor	kW	1,1		1,1	
Electric heating power	kW	6		9	
Total electric power (electric model)	kW	6,25		9,5	
Total electric power (hw, steammodel)	kW	1,1		1,1	
CONNECTIONS		ELECTRICAL	STEAM/HOT WATER	ELECTRICAL	STEAM/HOT WATER
Tensión 230V- I + N + T	Nº x mm2 / A	2x6+T / 40A	2x1,5+T / 16A	2x10+T / 50A	2x1,5+T / 16A
Tensión 230V- III + T	Nº x mm2 / A	3x2,5+T / 20A	-	3x4+T / 32A	-
Tensión 400V- III + N + T	Nº x mm2 / A	4x1,5+T / 16A	-	4x1,5+T / 16A	-
Steam inlet (Steam model)	inch	1/2"		1/2"	
Maximum steam consumption (Steam model)	Kg/h	7		8,5	
Water inlet	inch	3/4"		3/4"	
Water main pressure	Kg/cm^2	2-4		2-4	
Maximum water consumption	Lit/h	61,5*		78,8*	
Drain	mm/inch	3"		3"	
Drainage capacity	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	719/782		719/782	
Net Depth / Gross Depth	mm	755/890		856/990	
Net Height / Gross Height	mm	1.165/1.400		1.165/1.400	
Net weight / Gross weight	Kg	198/231,6		210/245	
Volume	m3	0,97		1,08	

* Programme No. 20, 75% load

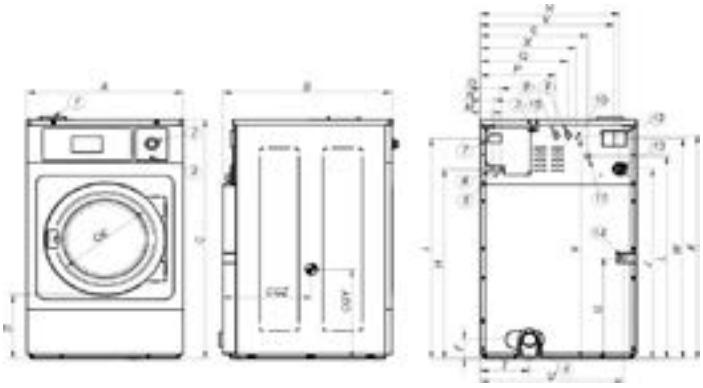

01. Soap dispenser
02. Emergency stop
03. USB port
04. Drain
05. Electric connection to liquid soap pump
06. Electrical connection
07. Main switch
08. Auxiliar water inlet
09. Hot water inlet
10. Equipotential connection
11. Cold water inlet
12. Blur output / Water overload
13. Liquid soap connection
14. Steam connection
15. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LN-11	mm	719	755	1.165	310	373	148	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.053	416	1.053	383	511
LN-14	mm	719	856	1.165	310	373	148	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.053	416	1.053	484	524

WASHING

—

NORMAL SPIN WASHERS
LOW AND MEDIUM CAPACITY
LN-18/22 TP2

CHARACTERISTICS

TP2
- User friendly and totally programmable 7”
- USB Connection. Online platform free of charge for programming, telemetry, data analysis…thanks to the IoT.
- Videos on display (ads, instructions, etc.)
- 37 languages.
- 8 dosing signals as standard.

G FACTOR
- G-FACTOR 200.

EFFICIENCY
- Intelligent consumption.
- Optimal loading.
- Low water consumption.

VERSATILITY
- Make to order: customisation.
- OPL < > COIN.
- Electric < > Hot water.
- Wet cleaning features.

CONNECTIVITY
- IoT - FagorKonnect.
- Remote technical service.
- Managemant of laundries: OPL and COIN.
- Remote payment.

ERGONOMICS
- Biggest door diameters: Ø460.
- Easy opening/closing system for door lock.

MAINTENANCE
- Hinged panel: easy access to parts.
- Equivalent parts for all models: contactors, electronic devices, gear.
- Technical menu: traceability, error diagnosis.

OTHERS
- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product Option ETL.

OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- SLUICE: model with 8mm drum holes.
- Anchoring base.
- Double drain.
- Normally closed valve.
- Water RE-CYCLE: recirculation of bath water.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Silicone gasket.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin / token kit.
- Auto unlock kit for the door.

	U.	LN-18 TP2		LN-22 TP2	
DRUM					
Load capacity 1:9 / 1:10	Kg	20/18		25/22	
Volume	l	180		220	
Diameter	mm	700		700	
Depth	mm	470		560	
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	50/714		50/714	
G Factor	-	200		200	
Maximum force transmitted	KN	2,63 ±5		3,04 ±5	
Frequency-dynamic force	Hz	8,42		8,42	
Noise level	dB	<70		<70	
Coin laundry version	-	Yes		Yes	
Double drain	-	Opt.		Opt.	
Weighing System / Tilting System	-	No		No	
Option SLUICE	-	Yes		Yes	
DOOR					
Height center door / Height door	mm	655/348		655/348	
Diameter	mm	460		460	
POWER					
Motor	kW	2,2		2,2	
Electric heating power	kW	12		12	
Total electric power (electric model)	kW	12,75		12,75	
Total electric power (hw, steam model)	kW	2,2		2,2	
CONNECTIONS		ELECTRIC	STEAM/HOT WATER	ELECTRIC	STEAM/HOT WATER
Tension 230V - I + N + T	Nº x mm2 / A	2x16+T / 63A	2x1,5+T / 16A	2x16+T / 63A	2x1,5+T / 16A
Tension 230V - III + T	Nº x mm2 / A	3x6+T / 40A	-	3x6+T / 40A	-
Tension 400V - III + N + T	Nº x mm2 / A	4x4+T / 32A	-	4x4+T / 32A	-
Steam inlet (Steam model)	inch	1/2"		1/2"	
Maximum steam consumption (Steam model)	Kg/h	12		12	
Water inlet	inch	3/4"		3/4"	
Water main pressure	Kg/cm^2	2-4		2-4	
Maximum water consumption	Lit/h	120*		120*	
Drain	mm/inch	3"		3"	
Drainage capacity	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	788/850		788/850	
Net Depth / Gross Depth	mm	935/1.013		1.035/1.106	
Net Height / Gross Height	mm	1.307/1.583		1.307/1.583	
Net weight / Gross weight	Kg	272/309		295/335	
Volume	m^3	1,36		1,5	

* Programme No. 20, 75% load

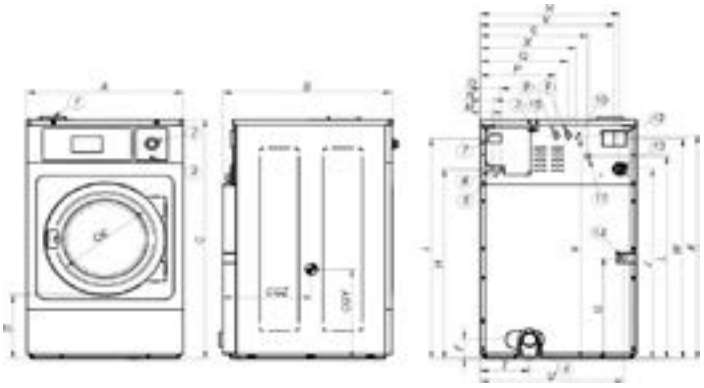

01. Soap dispenser
02. Emergency stop
03. USB port
04. Drain
05. Electric connection to liquid soap pump
06. Electrical connection
07. Main switch
08. Auxiliar water inlet
09. Hot water inlet
10. Equipotential connection
11. Cold water inlet
12. Blur output / Water overload
13. Liquid soap connection
14. Steam connection
15. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LN-18	mm	788	935	1.307	348	460	143	552	1.035	1.203	1.038	1.222	1.107	61	74	101	385	445	706	544	245	724	676	1.202	485	1.202	479	546
LN-22	mm	788	1.035	1.307	348	460	143	552	1.035	1.203	1.038	1.222	1.107	61	74	101	385	445	706	544	249	724	676	1.202	485	1.202	479	586

WASHING

—

NORMAL SPIN WASHERS
LOW AND MEDIUM CAPACITY
LN-28 TP2

CHARACTERISTICS

TP2
- User friendly and totally programmable 7”
- USB Connection. Online platform free of charge for programming, telemetry, data analysis…thanks to the IoT.
- Videos on display (ads, instructions, etc.)
- 37 languages. 8 dosing signals as standard.
- 8 dosing signals as standard.

G FACTOR
- G-FACTOR 200.

EFFICIENCY
- Intelligent consumption.
- Optimal loading.
- Low water consumption.

VERSATILITY
- Make to order: customisation .
- OPL < > COIN.
- Electric < > Hot water.
- Wet cleaning features.

CONNECTIVITY
- IoT - FagorKonnect.
- Remote technical service.
- Managemant of laundries: OPL and COIN.
- Remote payment.

ERGONOMICS
- Biggest door diameters: Ø460.
- Easy opening/closing system for door lock.

MAINTENANCE
- Hinged control panel: easy and ergonomic access.
- Equivalent parts for all models: contactors, electronic devices,...
- Technical menu: telemetry, error diagnosis.

OTHERS
- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product Option ETL.

OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- SLUICE: model with 8mm drum holes.
- Anchoring base.
- Double drain.
- Normally closed valve.
- Water RE-CYCLE: recirculation of bath water.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Silicone gasket.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin / token kit.
- Auto unlock kit for the door.

	U.	LN-28 TP2	
DRUM			
Load capacity 1:9 / 1:10	Kg	31/28	
Volume	l	280	
Diameter	mm	770	
Depth	mm	585	
GENERAL DETAILS			
Washing speed / Spining speed	r.p.m.	48/682	
G Factor	-	200	
Maximum force transmitted	KN	3,68 ± 6	
Frequency-dynamic force	Hz	8,02	
Noise level	dB	<70	
Coin laundry version	-	Yes	
Double drain	-	Opt.	
Weighing System / Tilting System	-	No	
SLUICE option	-	Yes	
DOOR			
Height center door / Height door	mm	700/400	
Diameter	mm	460	
POWER			
Motor	kW	4	
Electric heating power	kW	18	
Total electric power (electric model)	kW	19,2	
Total electric power (hw, steam model)	kW	4	
CONNECTIONS		ELECTRIC	STEAM / HOT WATER.
Tension 230V - I + N + T	Nº x mm2 / A	-	2x4+T / 32A
Tension 230V - III + T	Nº x mm2 / A	3x16+T / 63A	3x2,5+T / 20A
Tension 400V - III + N + T	Nº x mm2 / A	4x4+T / 32A	4x1,5+T / 16A
Steam inlet (Steam model)	inch	3/4”	
Maximum steam consumption (Steam model)	Kg/h	15	
Water inlet	inch	3/4”	
Water main pressure	Kg/cm^2	2-4	
Maximum water consumption	Lit/h	164,8*	
Drain	mm/inch	3”	
Drainage capacity	Lit/min	200	
DIMENSIONS / PACKING DIMENSIONS			
Net Width / Gross Width	mm	884/945	
Net Depth / Gross Depth	mm	1.075/1.230	
Net Height / Gross Height	mm	1.340/1.583	
Net weight / Gross weight	Kg	403/431	
Volume	m^3	1,84	

* Programme No. 20, 75% load

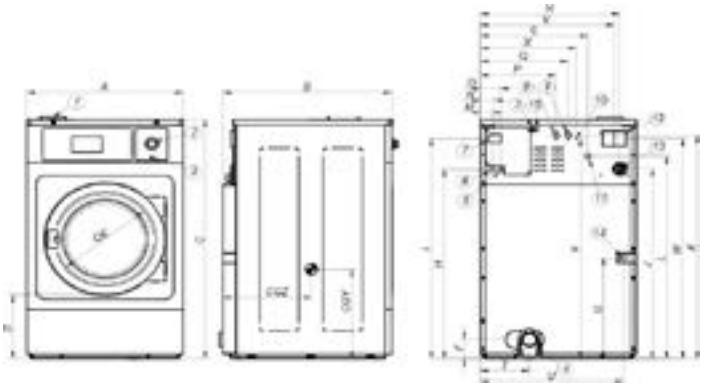

01. Soap dispenser
02. Emergency stop
03. USB port
04. Drain
05. Electric connection to liquid soap pump
06. Electrical connection
07. Main switch
08. Auxiliar water inlet
09. Hot water inlet
10. Equipotential connection
11. Cold water inlet
12. Blur output / Water overload
13. Liquid soap connection
14. Steam connection
15. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LN-28	mm	884	1.075	1.340	400	460	149	548	1.063	1.230	1.065	1.250	1.135	61	74	101	430	510	801	640	268	820	772	1.220	570	1.210	591	593

WASHING

—

NORMAL SPIN WASHERS
LOW AND MEDIUM CAPACITY
LN-35C/45C TP2

CHARACTERISTICS

TP2
- User friendly and totally programmable 7" TP2 touch screen
- USB Connection. PC software free of charge for programming, traceability, data analysis…
- Videos on display (ads, instructions)
- 37 languages
- 8 dosing signals as standard

G FACTOR
- G-FACTOR 200.

EFFICIENCY
- Intelligent consumption.
- Optimal loading.
- Water Recovery tanks ready: KRS.
- Low water consumption.

VERSATILITY
- Make to order: customisation .
- OPL < > COIN.
- Electric < > Hot water.
- Wet cleaning features.

CONNECTIVITY
- Remote technical service.
- Managemant of laundries: OPL and selfservice.
- Remote payment.

ERGONOMICS
- Biggest door diameters: Ø560 (for LN-35C/45C).
- Easy opening/closing system for door lock.

MAINTENANCE
- Hinged panel: easy access to parts.
- Equivalent parts for all models: contactors, electronic devices, gear.
- Technical menu: traceability, error diagnosis.

OTHERS
- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product Option ETL.

OPTIONS

- Double drain.
- Normally closed valve.
- Silicon gasket (for LN-35).
- WaterFULL FLOW recirculation of bath water.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Printer.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Stainless steel outer casing.
- Stainless steel front panel.
- SLUICE: model with 8mm drum holes (for LN-35C/45C).
- Anchoring base.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin / token kit.
- Delayed door opening in case of power outage.

	U.	LN-35C TP2		LN-45C TP2	
DRUM					
Load capacity 1:9 / 1:10	Kg	39/35		47/42	
Volume	l	350		450	
Diameter	mm	860		860	
Depth	mm	602		720	
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	45/644		45/644	
G Factor	-	200		200	
Maximum force transmitted	KN	4,59 ±8		5,9 ±8	
Frequency-dynamic force	Hz	7,58		7,58	
Noise level	dB	<70		<70	
Coin laundry version	-	Yes		Yes	
Double drain	-	Opt.		Opt.	
Weighing system / Tilting system	-	No		No	
SLUICE Version	-	Yes		Yes	
DOOR					
Height center door / Height door	mm	735/440		735/440	
Diameter	mm	560		560	
POWER					
Motor	kW	4		6	
Electric heating power	kW	21		21	
Total electric power (electric model)	kW	22		22	
Total electric power (hw, steam model)	kW	4		6	
CONNECTIONS		ELECTRIC	STEAM/HOT WATER	ELECTRIC	STEAM/HOT WATER
Tension 230V- I + N + T	Nº x mm2 / A	-	2x4+T / 32A	-	-
Tension 230V- III + T	Nº x mm2 / A	3x16+T/63A	3x2,5+T / 20A	3x16+T / 63A	3x4+T / 32A
Tension 400V- III + N + T	Nº x mm2 / A	4 x6+T / 40A	4x1,5+T / 16A	4x6+T / 40A	4x1,5+T / 16A
Steam inlet (Steam model)	inch	3/4"		3/4"	
Maximum steam consumption (Steam model)	Kg/h	18		21	
Water inlet	inch	3/4"		3/4"	
Water main pressure	Kg/cm^2	2-4		2-4	
Maximum water consump.	Lit/h	199,6*		256,6*	
Drain	mm/inch	3"		3"	
Drainage capacity	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	979/1.045		979/1.125	
Net Depth / Gross Depth	mm	1.155/1.280		1.325/1.440	
Net Height / Gross Height	mm	1.411/1.655		1.411/1.640	
Net weight / Gross weight	Kg	476/510		600/670	
Volume	m^3	2,2		2,6	

* Programme No. 20, 75% load

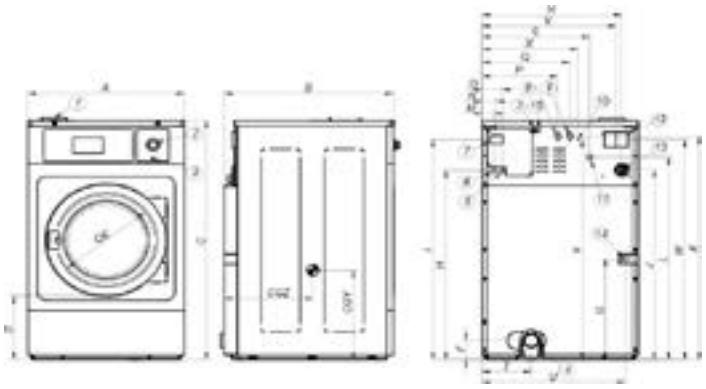

01. Soap dispenser
02. Emergency stop
03. USB port
04. Drain
05. Electric connection to liquid soap pump
06. Electrical connection
07. Main switch
08. Auxiliar water inlet
09. Hot water inlet
10. Equipotential connection
11. Cold water inlet
12. Blur output / Water overload
13. Liquid soap connection
14. Steam connection
15. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LN-35C	mm	979	1.155	1.411	370	560	149	623	1.139	1.307	1.116	1.322	1.211	61	74	101	545	625	885	715	262	917	855	1.281	760	1.373	635	682
LN-45C	mm	979	1.325	1.411	370	560	154	623	1.139	1.307	1.116	1.322	1.211	61	74	101	545	625	885	715	262	917	855	1.281	760	1.373	635	760

WASHING

—

NORMAL SPIN WASHER EXTRACTORS
HIGH CAPACITY
LN-60C/80C TP2

CHARACTERISTICS

TP2
- User friendly and totally programmable 7”
- USB Connection. Online platform free of charge for programming, telemetry, data analysis…thanks to the IoT.
- Videos on display (ads, instructions, etc.)
- 37 languages. 8 dosing signals as standard.
- 8 dosing signals as standard.

G FACTOR
- High G-Factor 150.

EFFICIENCY
- Intelligent consumption.
- Optimal loading.
- Low water consumption.

VERSATILITY
- Make to order: customisation.
- OPL < > COIN.
- Electric < > Hot water.
- WET CLEANING features as standard.

CONNECTIVITY
- IoT - FagorKonnect.
- Remote technical service.
- Managemant of laundries: OPL.
- Remote payment.

ERGONOMICS
- Big door diameters: Ø 560 mm.
- Easy opening/closing system for door lock.

MAINTENANCE
- Hinged control panel: easy and ergonomic access.
- Equivalent parts for all models: contactors, electronic devices,...
- Technical menu: telemetry, error diagnosis.diagnosis.

OTHERS
- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304.
- 3 water inlets (Water inlet hoses not included).
- CB and WRAS approved product Option ETL.

OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- SLUICE: model with 8mm drum holes.
- Anchoring base.
- Double drain.
- Normally closed valve.
- Water inlet hose.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin / token kit.
- Auto unlock kit for the door.
- Stainless steel AISI 304 outer casing.
- Front soap dispenser.

	U.	LN-60C TP2		LN-80C TP2	
DRUM					
Load capacity 1:9 / 1:10	Kg	65/59		85/77	
Volume	l	600		800	
Diameter	mm	1.048		1.048	
Depth	mm	684		936	
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	42,5 / 505		42,5 / 505	
G Factor	-	150		150	
Maximum force transmitted	KN	9,12 ± 15		10,17 ± 15	
Frequency-dynamic force	Hz	6,93		6,93	
Noise level	dB	< 70		< 70	
Coin laundry version	-	Yes		Yes	
Double drain	-	Opt.		Opt.	
Weighing system / Tilting system	-	No		No	
SLUICE option		Yes		Yes	
DOOR					
Height center door / Height door	mm	900 / 540		900 / 540	
Diameter	mm	560		560	
Motor	kW	5,5		5,5	
Electric heating power	kW	36		48/36***	
Total electric power (electric model)	kW	38		50,5/38,5***	
Total electric power (hot water, steam)	kW	5,5		7,5	
CONNECTIONS		ELECTRIC	STEAM/HOT WATER	ELECTRIC	STEAM/HOT WATER
Tension 230V - III + T	Nº x mm2 / A	3x25+T / 100A	3x4+T / 32A	3x25+T / 100A	3x4+T / 32A
Tension 400V - III + N + T	Nº x mm2 / A	4x16+T / 63A	4x1,5+T / 16A	4x25+T / 80A	4x4+T / 20A
Steam inlet (Steam model)	inch	3/4"		3/4"	
Max. steam consumption (Steam model)	Kg/h	21		21	
Water inlet	inch	1"		1"	
Water main pressure	Kg/cm^2	2-4		2-4	
Maximum water consumption	Lit/h	627,9**		814,5**	
Drain	mm/inch	3"		3"	
Drainage capacity	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	1.225 / 1.335		1.225 / 1.335	
Net Depth / Gross Depth	mm	1.315 / 1.440		1.492 / 1.660	
Net Height / Gross Height	mm	1.640 / 1.860		1.640 / 1.860	
Net weight / Gross weight	Kg	792 / 878		871 /963	
Volume	m^3	3,6		4,12	

** Programme No. 2, 100% load
***400V=48kW / 230V=36kW version

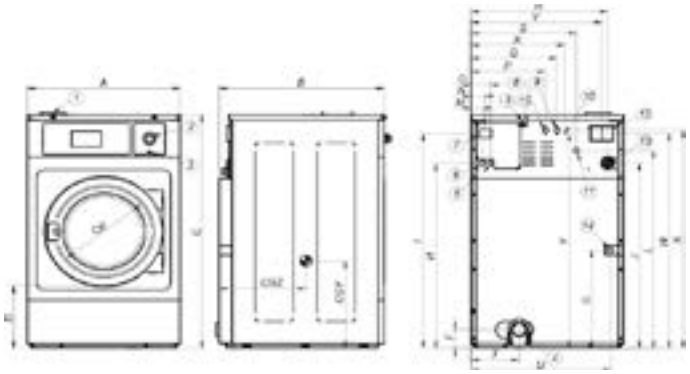

01. Soap dispenser
02. Emergency stop
03. USB port
04. Drain
05. Electric connection to liquid soap pump
06. Electrical connection
07. Main switch
08. Auxiliar water inlet
09. Hot water inlet
10. Equipotential connection
11. Cold water inlet
12. Blur output / Water overload
13. Liquid soap connection
14. Steam connection
15. Ethernet port

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LN-60C	1.225	1.315	1.640	540	560	115	984	1.368	1.536	1.306	1.551	1.318	61	74	101	651	731	1.110	869	318	1.163	1.080	1.470	992	1.595	644	972
LN-80C	1.225	1.492	1.640	540	560	115	984	1.368	1.536	1.306	1.551	1.318	61	74	101	651	731	1.110	869	318	1.163	1.080	1.470	992	1.595	644	750