



WASHING

NORMAL SPIN WASHERS LOW AND MEDIUM CAPACITY LN-11/14 TP2



CHARACTERISTICS

TP2

- User friendly and totally programmable 7".
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
- Videos on display (ads, instructions, etc.).
- 37 languages.
- 8 dosing signals as standard 8 dosing.

G FACTOR

- High G-Factor of 200.

EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Low water consumption.

VERSATILITY

- Make to order: customisation.
- OPL < > COIN.
- Electric < > Hot water.
- Wet cleaning features.

CONNECTIVITY

- IoT - FagorKonnnect.
- Remote technical service.
- Management of laundries: OPL and selfservice.
- Remote payment.

ERGONOMICS

- Biggest door diameters: Ø373.
- Easy opening/closing system for door lock.

MAINTENANCE

- Hinged control panel: easy and ergonomic access.
- Equivalent parts for all models: contactors, electronic devices,...
- Technical menu: telemetry, error diagnosis.

OTHERS

- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product Option ETL.

OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- SLUICE: model with 8mm drum holes.
- Anchoring base.
- External double drain 3".
- Normally closed valve.
- Water FULL FLOW: recirculation of bath water.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Silicone gasket.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin / token kit.
- Auto unlock kit for the door.

TECHNICAL DATA


NORMAL SPIN WASHERS | LOW AND MEDIUM CAPACITY | LN-11/14 TP2

	U.	LN-11 TP2	LN-14 TP2		
DRUM					
Load capacity 1:9 / 1:10	Kg	11/10	14/13		
Volume	l	100	130		
	gal	26,4	34,3		
Diameter	mm	620	620		
	inch	24,1	24,1		
Depth	mm	330	430		
	inch	12,99	16,9		
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	53/759	53/759		
G Factor	-	200	200		
Maximum force transmitted	KN	2,0 ±3	2,31 ±4		
Frequency-dynamic force	Hz	8,93	8,93		
Noise level	dB	< 70	< 70		
Coin laundry version	-	Yes	Yes		
Double drain	-	No	Opt.		
Weighing System / Tilting System	-	No	No		
SLUICE option	-	Yes	Yes		
DOOR					
Height center door / Height door	mm	570/310	570/310		
	inch	22,4"/12,2"	22,4"/12,2"		
Diameter	mm	373	373		
	inch	14,6"	14,6"		
POWER					
Motor	kW	1,1	1,1		
Electric heating power	kW	6	9		
Total electric power (electric model)	kW	6,25	9,5		
Total electric power (hw, steam model)	kW	1,1	1,1		
CONNECTIONS		ELECTRICAL	STEAM/HOT WATER	ELECTRICAL	STEAM/HOT WATER
Tension 230V - I + N + T	N° x mm²/A	3x6 / 40A	3x1,5/ 16A	3x10 / 50A	3x1,5 / 16A
	N° x AWG/A	3x9 / 35A	3x14 / 15A	3x7 / 50A	3x15 / 15A
Tension 230V - III + T	N° x mm²/A	4x2,5 / 20A	-	4x4 / 32A	-
	N° x AWG/A	4x13 / 20A	-	4x11 / 30A	-
Tension 400V - III + N + T	N° x mm²/A	5x1,5 / 16A	-	5x1,5 / 16A	-
	N° x AWG/A	5x15 / 15A	-	5x15 / 20A	-
Steam inlet (Steam model)	inch	1/2"		1/2"	
Maximum steam consumption (Steam model)	Kg/h	7		8,5	
Water inlet	inch	3/4"		3/4"	
Water main pressure	Kg/cm²	2-4		2-4	
Water consumption	Lit/h	72*/88**		91*/112**	
	GPH	19,02*/23,25**		24,04*/29,59**	
Drain	mm/inch	3"		3"	
Drainage capacity	Lit/min	200		200	
	GPM	52,8		52,8	

DIMENSIONS / PACKING DIMENSIONS

Net width / Gross width	mm	719 / 782	719 / 782
	inch	28,3"/30,78"	28,3"/30,78"
Nwt depth / Gross depth	mm	755 / 890	856 / 990
	inch	29,7"/35"	33,7"/38,9"
Net height / Gross height	mm	1.165 / 1.400	1.165 / 1.400
	inch	45,8"/55,1"	45,8"/55,1"
Net weight / Gross weight	Kg	198 / 231,6	210 / 245
	lb	436,5/510,59	462,97/540,1
Volume	m ³	0,97	1,08
	ft ³	34,2	38,1

*Programme ECO
**Programme 60°C

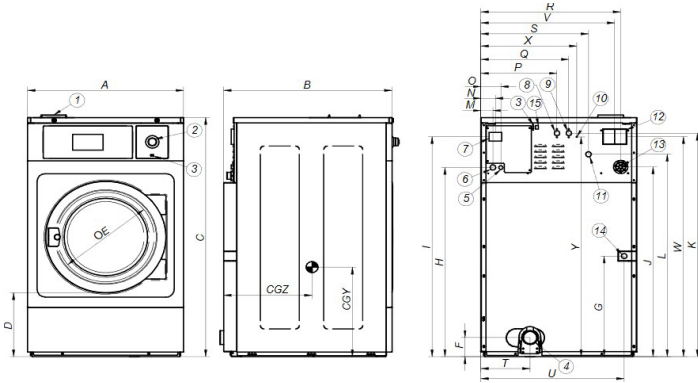

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain
- 05. Electric connection to liquid soap pump
- 06. Electrical connection
- 07. Main switch

- 08. Auxiliar water inlet
- 09. Hot water inlet
- 10. Equipotential connection
- 11. Cold water inlet
- 12. Blur output / Water overload
- 13. Liquid soap connection
- 14. Steam connection
- 15. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LN-11	mm	719	755	1.165	310	373	148	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.053	416	1.053	383	511
LN-14	mm	719	856	1.165	310	373	148	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.053	416	1.053	484	524



WASHING

NORMAL SPIN WASHERS LOW AND MEDIUM CAPACITY LN-18/22 TP2



CHARACTERISTICS

TP2

- User friendly and totally programmable 7"
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
- Videos on display (ads, instructions, etc.)
- 37 languages.
- 8 dosing signals as standard.

G FACTOR

- G-FACTOR 200.

EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Low water consumption.

VERSATILITY

- Make to order: customisation.
- OPL < > COIN.
- Electric < > Hot water.
- Wet cleaning features.

CONNECTIVITY

- IoT - FagorKonnnect.
- Remote technical service.
- Management of laundries: OPL and COIN.
- Remote payment.

ERGONOMICS

- Biggest door diameters: Ø460.
- Easy opening/closing system for door lock.

MAINTENANCE

- Hinged panel: easy access to parts.
- Equivalent parts for all models: contactors, electronic devices, gear.
- Technical menu: traceability, error diagnosis.

OTHERS

- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product Option ETL.

OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- SLUICE: model with 8mm drum holes.
- Anchoring base.
- Double drain.
- Normally closed valve.
- Water RE-CYCLE: recirculation of bath water.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Silicone gasket.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin / token kit.
- Auto unlock kit for the door.

TECHNICAL DATA


NORMAL SPIN WASHERS | LOW AND MEDIUM CAPACITY | LN-18/22 TP2

	U.	LN-18 TP2	LN-22 TP2		
DRUM					
Load capacity 1:9 / 1:10	Kg	20/18	25/22		
Volume	l	180	220		
	gal	47,5	58,1		
Diameter	mm	700	700		
	inch	27,5	27,5		
Depth	mm	470	560		
	inch	18,5	22		
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	50/714	50/714		
G Factor	-	200	200		
Maximum force transmitted	KN	2,63 ±5	3,04 ±5		
Frequency-dynamic force	Hz	8,42	8,42		
Noise level	dB	< 70	< 70		
Coin laundry version	-	Yes	Yes		
Double drain	-	Opt.	Opt.		
Weighing System / Tilting System	-	No	No		
SLUICE option	-	Yes	Yes		
DOOR					
Height center door / Height door	mm	655 / 348	655 / 348		
	inch	22,78"/13,7"	22,78"/13,7"		
Diameter	mm	460	460		
	inch	18,1"	18,1"		
POWER					
Motor	kW	2,2	2,2		
Electric heating power	kW	12	12		
Total electric power (electric model)	kW	12,75	12,75		
Total electric power (hw, steam model)	kW	2,2	2,2		
CONNECTIONS		ELECTRIC	STEAM/HOT WATER	ELECTRIC	STEAM/HOT WATER
Tension 230V - I + N + T	N° x mm ² /A	3x16 / 63A	3x1,5 / 16A	3x16 / 63A	3x1,5 / 16A
	N° x AWG/A	3x5 / 70A	3x15 / 15A	3x5 / 70A	3x15 / 15A
Tension 230V - III + T	N° x mm ² /A	4X6 / 40A	-	4X6 / 40A	-
	N° x AWG/A	4x9 / 40A	-	4x9 / 40A	-
Tension 400V - III + N + T	N° x mm ² /A	5x4 / 32A	-	5x4 / 32A	-
	N° x AWG/A	5x11 / 30A	-	5x11 / 30A	-
Steam inlet (Steam model)	inch	1/2"	1/2"	1/2"	1/2"
Maximum steam consumption (Steam model)	Kg/h	12	12	12	12
Water inlet	inch	3/4"	3/4"	3/4"	3/4"
Water main pressure	Kg/cm ²	2-4	2-4	2-4	2-4
Water consumption	Lit/h	117*/144**	143*/176**	117*/144**	143*/176**
	GLP	30,9*/38,04**	37,78*/46,49**	30,9*/38,04**	37,78*/46,49**
Drain	mm/inch	3"	3"	3"	3"
Drainage capacity	Lit/min	200	200	200	200
	GPM	52,8	52,8	52,8	52,8

DIMENSIONS / PACKING DIMENSIONS

Net width / Gross width	mm	788 / 850	788 / 850
	inch	31"/33,4"	31"/33,4"
Nwt depth / Gross depth	mm	935 / 1.013	1035/1106
	inch	36,8"/39,88"	40,7"/43,5"
Net height / Gross height	mm	1.307 / 1.583	1.307 / 1.583
	inch	51,4"/62,3"	51,4"/62,3"
Net weight / Gross weight	Kg	272 / 309	295/335
	lb	599,6/681,2	650,3/738,5
Volume	m ³	1,36	1,5
	ft ³	48	52,9

*Programme ECO
**Programme 60°C

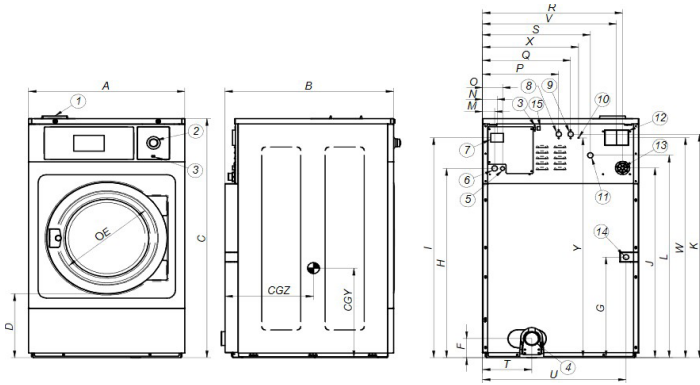

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain
- 05. Electric connection to liquid soap pump
- 06. Electrical connection
- 07. Main switch
- 08. Auxiliar water inlet
- 09. Hot water inlet
- 10. Equipotential connection
- 11. Cold water inlet
- 12. Blur output / Water overload
- 13. Liquid soap connection
- 14. Steam connection
- 15. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LN-18	mm	788	935	1.307	348	460	143	552	1.035	1.203	1.038	1.222	1.107	61	74	101	385	445	706	544	245	724	676	1.202	485	1.202	479	546
LN-22	mm	788	1.035	1.307	348	460	143	552	1.035	1.203	1.038	1.222	1.107	61	74	101	385	445	706	544	249	724	676	1.202	485	1.202	479	586



WASHING

NORMAL SPIN WASHERS LOW AND MEDIUM CAPACITY LN-28 TP2



CHARACTERISTICS

TP2

- User friendly and totally programmable 7"
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
- Videos on display (ads, instructions, etc.)
- 37 languages. 8 dosing signals as standard.
- 8 dosing signals as standard.

G FACTOR

- G-FACTOR 200.

EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Low water consumption.

VERSATILITY

- Make to order: customisation .
- OPL < > COIN.
- Electric < > Hot water.
- Wet cleaning features.

CONNECTIVITY

- IoT - FagorKconnect.
- Remote technical service.
- Management of laundries: OPL and COIN.
- Remote payment.

ERGONOMICS

- Biggest door diameters: Ø460.
- Easy opening/closing system for door lock.

MAINTENANCE

- Hinged control panel: easy and ergonomic access.
- Equivalent parts for all models: contactors, electronic devices,...
- Technical menu: telemetry, error diagnosis.

OTHERS

- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product Option ETL.

OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- SLUICE: model with 8mm drum holes.
- Anchoring base.
- Double drain.
- Normally closed valve.
- Water RE-CYCLE: recirculation of bath water.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Silicone gasket.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin / token kit.
- Auto unlock kit for the door.

TECHNICAL DATA


NORMAL SPIN WASHERS | LOW AND MEDIUM CAPACITY | LN-28 TP2

	U.	LN-28 TP2	
DRUM			
Load capacity 1:9 / 1:10	Kg	31/28	
Volume	l	280	
	gal	73,9	
Diameter	mm	770	
	inch	30,3	
Depth	mm	585	
	inch	23	
GENERAL DETAILS			
Washing speed / Spining speed	r.p.m.	48/682	
G Factor	-	200	
Maximum force transmitted	KN	3,68 ±6	
Frequency-dynamic force	Hz	8,02	
Noise level	dB	< 70	
Coin laundry version	-	Yes	
Double drain	-	Opt.	
Weighing System / Tilting System	-	No	
SLUICE option	-	Yes	
DOOR			
Height center door / Height door	mm	700 / 400	
	inch	27,5"/15,7"	
Diameter	mm	460	
	inch	18,1"	
POWER			
Motor	kW	4	
Electric heating power	kW	18	
Total electric power (electric model)	kW	19,2	
Total electric power (hw, steam model)	kW	4	
CONNECTIONS		ELECTRIC	STEAM / HOT WATER.
Tension 230V - I + N + T	N° x mm²/A	-	3x4 / 32A
	N° x AWG/A	-	3x11 / 20A
Tension 230V - III + T	N° x mm²/A	4x16 / 63A	4x2,5 / 20A
	N° x AWG/A	4x5 / 60A	4x13 / 20A
Tension 400V - III + N + T	N° x mm²/A	5x4 / 32A	5x1,5 / 16A
	N° x AWG/A	5x11 / 40A	5x15 / 15A
Steam inlet (Steam model)	inch	3/4"	
Maximum steam consumption (Steam model)	Kg/h	15	
Water inlet	inch	3/4"	
Water main pressure	Kg/cm²	2-4	
Water consumption	Lit/h	182*/224**	
	GLP	48,08*/59,17**	
Drain	mm/inch	3"	
Drainage capacity	Lit/min	200	
	GPM	52,8	

DIMENSIONS / PACKING DIMENSIONS

Net width / Gross width	mm	884/ 945
	inch	34,8"/37,2"
Nwt depth / Gross depth	mm	1075/1230
	inch	42,3"/48,4"
Net height / Gross height	mm	1.340 / 1.583
	inch	52,7"/62,3"
Net weight / Gross weight	Kg	403/431
	lb	888,4/950,19
Volume	m ³	1,84
	ft ³	64,9

*Programme ECO
**Programme 60°C

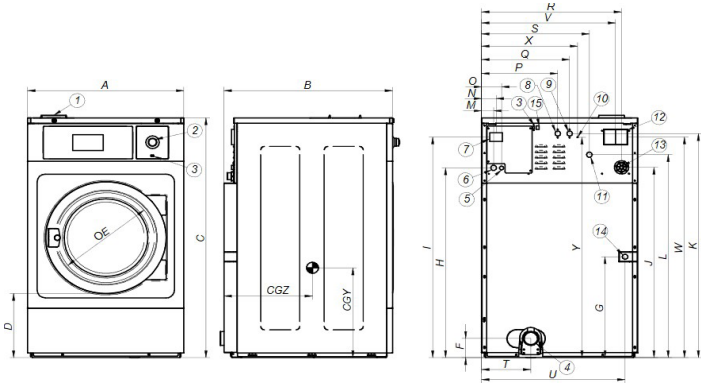

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain
- 05. Electric connection to liquid soap pump
- 06. Electrical connection
- 07. Main switch
- 08. Auxiliar water inlet
- 09. Hot water inlet
- 10. Equipotential connection
- 11. Cold water inlet
- 12. Blur output / Water overload
- 13. Liquid soap connection
- 14. Steam connection
- 15. Ethernet port

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
LN-28	mm	884	1.075	1.340	400	460	149	548	1.063	1.230	1.065	1.250	1.135	61	74	101	430	510	801	640	268	820	772	1.220	570	1.210	591	593



WASHING

NORMAL SPIN WASHERS LOW AND MEDIUM CAPACITY LN-35C/45C TP2

CHARACTERISTICS

TP2

- User friendly and totally programmable 7" TP2 touch screen
- USB Connection. PC software free of charge for programming, traceability, data analysis...
- Videos on display (ads, instructions)
- 37 languages
- 8 dosing signals as standard

G FACTOR

- G-FACTOR 200.

EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Water Recovery tanks ready: KRS.
- Low water consumption.

VERSATILITY

- Make to order: customisation .
- OPL < > COIN.
- Electric < > Hot water.
- Wet cleaning features.

CONNECTIVITY

- Remote technical service.
- Management of laundries: OPL and selfservice.
- Remote payment.

ERGONOMICS

- Biggest door diameters: Ø560 (for LN-35C/45C).
- Easy opening/closing system for door lock.

MAINTENANCE

- Hinged panel: easy access to parts.
- Equivalent parts for all models: contactors, electronic devices, gear.
- Technical menu: traceability, error diagnosis.

OTHERS

- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product Option ETL.

OPTIONS

- Double drain.
- Normally closed valve.
- Silicon gasket (for LN-35).
- WaterFULL FLOW recirculation of bath water.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Printer.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Stainless steel outer casing.
- Stainless steel front panel.
- SLUICE: model with 8mm drum holes (for LN-35C/45C).
- Anchoring base.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin / token kit.
- Delayed door opening in case of power outage.



TECHNICAL DATA


NORMAL SPIN WASHERS | LOW AND MEDIUM CAPACITY | LN-35C/45C TP2

	U.	LN-35C TP2	LN-45C TP2		
DRUM					
Load capacity 1:9 / 1:10	Kg	39/35	47/42		
Volume	l	350	450		
	gal	92,4	118,8		
Diameter	mm	860	860		
	inch	33,8	33,8		
Depth	mm	602	720		
	inch	23,7	28,3		
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	45/644	45/644		
G Factor	-	200	200		
Maximum force transmitted	KN	4,59 ±8	5,9 ±8		
Frequency-dynamic force	Hz	7,58	7,58		
Noise level	dB	< 70	< 70		
Coin laundry version	-	Yes	Yes		
Double drain	-	Opt.	Opt.		
Weighing System / Tilting System	-	No	No		
SLUICE option	-	Yes	Yes		
DOOR					
Height center door / Height door	mm	735 / 440	735 / 440		
	inch	28,9"/17,3"	28,9"/17,3"		
Diameter	mm	560	560		
	inch	22"	22"		
POWER					
Motor	kW	4	6		
Electric heating power	kW	21	21		
Total electric power (electric model)	kW	22	22		
Total electric power (hw, steam model)	kW	4	6		
CONNECTIONS		ELECTRIC	STEAM/HOT WATER	ELECTRIC	STEAM/HOT WATER
Tension 230V - I + N + T	N° x mm²/A	-	3x4 / 32A	-	-
	N° x AWG/A	-	3x11 / 20A	-	-
Tension 230V - III + T	N° x mm²/A	4x16 / 63A	4x2,5 / 20A	4x16 / 63A	4x4 / 32A
	N° x AWG/A	4x5 / 70A	4x13 / 20A	4x5 / 70A	4x11 / 30A
Tension 400V - III + N + T	N° x mm²/A	5x6 / 40A	5x1,5 / 16A	5x6 / 40A	5x1,5 / 16A
	N° x AWG/A	5x9 / 45A	5x15 / 15A	5x8 / 45A	5x15 / 15A
Steam inlet (Steam model)	inch	3/4"		3/4"	
Maximum steam consumption (Steam model)	Kg/h	18		21	
Water inlet	inch	3/4"		3/4"	
Water main pressure	Kg/cm²	2-4		2-4	
Water consumption	Lit/h	228*/280**		293*/360**	
	GPH	60,23*/73*97**		77,4*/95,1**	
Drain	mm/inch	3"		3"	
Drainage capacity	Lit/min	200		200	
	GPM	52,8		52,8	

DIMENSIONS / PACKING DIMENSIONS


Net width / Gross width	mm	979 / 1.045	979 / 1.125
	inch	38,5"/41,1"	38,5"/44,2"
Nwt depth / Gross depth	mm	1.155 / 1.280	1.325 / 1.440
	inch	45,4"/50,39"	52,1"/56,69"
Net height / Gross height	mm	1.411 / 1.655	1.411 / 1.640
	inch	55,5"/65,1"	55,5"/64,5"
Net weight / Gross weight	Kg	476 / 510	600 / 670
	lb	1049,4/1124,3	1322,7/1477,1
Volume	m ³	2,2	2,6
	ft ³	77,69	91,8

*Programme ECO
**Programme 60°C

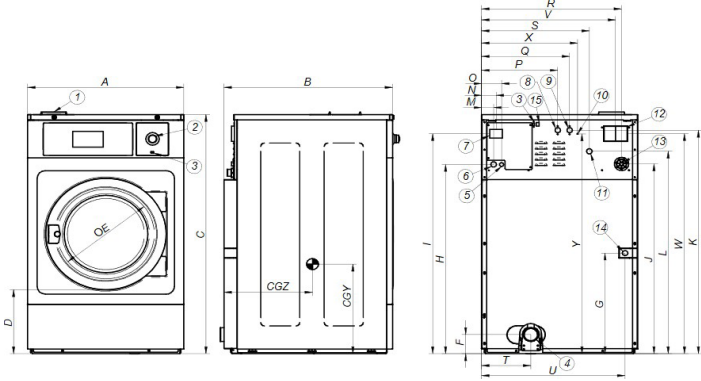

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain
- 05. Electric connection to liquid soap pump
- 06. Electrical connection
- 07. Main switch
- 08. Auxiliar water inlet
- 09. Hot water inlet
- 10. Equipotential connection
- 11. Cold water inlet
- 12. Blur output / Water overload
- 13. Liquid soap connection
- 14. Steam connection
- 15. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LN-35C	mm	979	1.155	1.411	370	560	149	623	1.139	1.307	1.116	1.322	1.211	61	74	101	545	625	885	715	262	917	855	1.281	760	1.373	635	682
LN-45C	mm	979	1.325	1.411	370	560	154	623	1.139	1.307	1.116	1.322	1.211	61	74	101	545	625	885	715	262	917	855	1.281	760	1.373	635	760



WASHING

NORMAL SPIN WASHER EXTRACTORS HIGH CAPACITY LN-60C/80C TP2

CHARACTERISTICS

TP2

- User friendly and totally programmable 7"
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
- Videos on display (ads, instructions, etc.)
- 37 languages. 8 dosing signals as standard.
- 8 dosing signals as standard.

G FACTOR

- High G-Factor 150.

EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Low water consumption.

VERSATILITY

- Make to order: customisation.
- OPL < > COIN.
- Electric < > Hot water.
- WET CLEANING features as standard.

CONNECTIVITY

- IoT - FagorKconnect.
- Remote technical service.
- Management of laundries: OPL.
- Remote payment.

ERGONOMICS

- Big door diameters: Ø 560 mm.
- Easy opening/closing system for door lock.

MAINTENANCE

- Hinged control panel: easy and ergonomic access.
- Equivalent parts for all models: contactors, electronic devices,...
- Technical menu: telemetry, error diagnosis.diagnosis.

OTHERS

- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304.
- 3 water inlets (Water inlet hoses not included).
- CB and WRAS approved product Option ETL.

OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- SLUICE: model with 8mm drum holes.
- Anchoring base.
- Double drain.
- Normally closed valve.
- Water inlet hose.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin / token kit.
- Auto unlock kit for the door.
- Stainless steel AISI 304 outer casing.
- Front soap dispenser.



TECHNICAL DATA


NORMAL SPIN WASHERS | HIGH CAPACITY | LN-60C/80C TP2

	U.	LN-60C TP2	LN-80C TP2		
DRUM					
Load capacity 1:9 / 1:10	Kg	65/59	85/77		
Volume	l	600	800		
	gal	158,5	211,3		
Diameter	mm	1048	1048		
	inch	41,2	41,2		
Depth	mm	684	936		
	inch	26,9	36,8		
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	42,5/505	42,5/505		
G Factor	-	150	150		
Maximum force transmitted	KN	9,12 ±15	10,17 ±15		
Frequency-dynamic force	Hz	6,93	6,93		
Noise level	dB	< 70	< 70		
Coin laundry version	-	Yes	Yes		
Double drain	-	Opt.	Opt.		
Weighing System / Tilting System	-	No	No		
SLUICE option	-	Yes	Yes		
DOOR					
Height center door / Height door	mm	900 / 540	900 / 540		
	inch	35,4"/21,2"	35,4"/21,2"		
Diameter	mm	560	560		
	inch	22"	22"		
MOTOR					
Motor	kW	5,5	5,5		
Electric heating power	kW	36	48/36***		
Total electric power (electric model)	kW	38	50,5/38,5***		
Total electric power (hw, steam model)	kW	5,5	7,5		
CONNECTIONS		ELECTRIC	STEAM/HOT WATER	ELECTRIC	STEAM/HOT WATER
Tension 230V - III + T	N° x mm²/A	4x25 / 100A	4x4 / 32A	4x25 / 100A	4x4 / 32A
	N° x AWG/A	4x3 / 125A	4x11 / 50A	4x3 / 125A	4x11 / 50A
Tension 400V - III + N + T	N° x mm²/A	5x16 / 63A	5x1,5 / 16A	5x25 / 80A	5x4 / 20A
	N° x AWG/A	5x5 / 70A	5x15 / 30A	5x3 / 70A	5x11 / 30A
Steam inlet (Steam model)	inch	3/4"		3/4"	
Maximum steam consumption (Steam model)	Kg/h	21		21	
Water inlet	inch	1"		1"	
Water main pressure	Kg/cm²	2-4		2-4	
Water consumption	Lit/h	390*/480**		520*/640**	
	GLP	103,03*/126,8**		137,37*/169,07**	
Drain	mm/inch	3"		3"	
Drainage capacity	Lit/min	200		200	
	GPM	52,8		52,8	

DIMENSIONS / PACKING DIMENSIONS

Net width / Gross width	mm	1.225 / 1.335	1.225 / 1.335
	inch	48,2"/52,5"	48,2"/52,5"
Nwt depth / Gross depth	mm	1.315 / 1.440	1.492 / 1.660
	inch	51,77"/56,69"	58,7"/65,3"
Net height / Gross height	mm	1.640 / 1.860	1.640 / 1.860
	inch	64,5"/73,2"	64,5"/73,2"
Net weight / Gross weight	Kg	792 / 878	871/963
	lb	1746/1935,6	1920,2/2123
Volume	m ³	3,6	4,12
	ft ³	127,1	145,49

*Programme ECO
 **Programme 60°C
 ***400V=48kW / 230V=36kW version

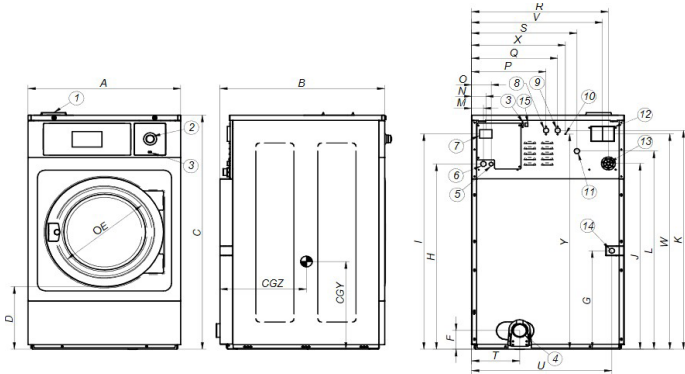

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain
- 05. Electric connection to liquid soap pump
- 06. Electrical connection
- 07. Main switch
- 08. Auxiliar water inlet
- 09. Hot water inlet
- 10. Equipotential connection
- 11. Cold water inlet
- 12. Blur output / Water overload
- 13. Liquid soap connection
- 14. Steam connection
- 15. Ethernet port

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LN-60C	1.225	1.315	1.640	540	560	115	984	1.368	1.536	1.306	1.551	1.318	61	74	101	651	731	1.110	869	318	1.163	1.080	1.470	992	1.595	644	972
LN-80C	1.225	1.492	1.640	540	560	115	984	1.368	1.536	1.306	1.551	1.318	61	74	101	651	731	1.110	869	318	1.163	1.080	1.470	992	1.595	644	750