



WATER RECOVERY

WATER RECOVERY TANKS KRS WREC-80 T1

CHARACTERISTICS

- 80 and 150 litre tanks to save the maximum amount of water in small spaces.
- Each washing machine or sanitary barrier can have between one and three tanks in column.
- Made of high density polyethylene and external reinforcement with skinplate panel structure, stainless steel aesthetics.
- Tank with rounded corners to prevent the accumulation of dirt and facilitate cleaning.

EFFICIENCY

- Up to 70% water saving.
- Up to 40% energy saving.
- Savings in detergents.

EASY INSTALLATION & MAINTENANCE

- Plug and play.
- Requires little space.
- Self-cleaning tanks with pre-set programmes (with washers equipped with TP2 control).
- Removable tanks for easy cleaning and maintenance.

OTHERS

- 1, 2 or 3 tanks.
- Grey skinplate panels.
- High density polyethylene tanks.
- 2 water level sensors in each tank.
- 80l tanks for washing machines from 11 to 18 kg and sanitary barriers from 16 kg.
- 150l tanks for 22 to 28 kg washing machines and 22 kg sanitary barriers.

OPTIONS


- Sanitary barrier kit LMED-16 for connection of 3/4' tanks WREC 1000. 3/4' WREC 1000 tanks.
- Sanitary barrier kit LMED-22 for connection 3/4' tanks WREC 1000. 3/4' tanks WREC 1000.
- Washing machine kit LA/LN-11/14/18/22/28 for connection 3/4' tanks WREC 1000. 3/4' tanks WREC 1000.



TECHNICAL DATA

WATER RECOVERY TANKS | KRS | WREC-80 T1

| | U. | WREC-80 T1 |
|------------------------------------|------|---------------------|
| TANKS | | |
| Tanks | l | 80*1 |
| Washers capacities:front / barrier | Kg | 11, 14, 18 / 16, 22 |
| External panels | - | skinplate |
| Tank material | - | polyethylene |
| CONNECTIONS | | |
| Water inlet | inch | 3/4" |
| Water outlet | inch | 3/4" |
| Ø Fumes outlet | mm | 21 |
| Ø Drain | mm | 21 |
| Tension | V | 230V I |
| DIMENSIONS / PACKING DIMENSIONS | | |
| Net width / Gross width | mm | 551 / 570 |
| Net depth / Gross depth | mm | 722,6 / 800 |
| Net height / Gross height | mm | 607,8 / 1.050 |
| Net weight / Gross weight | Kg | 60 / 80 |
| Volume | m³ | 0,479 |

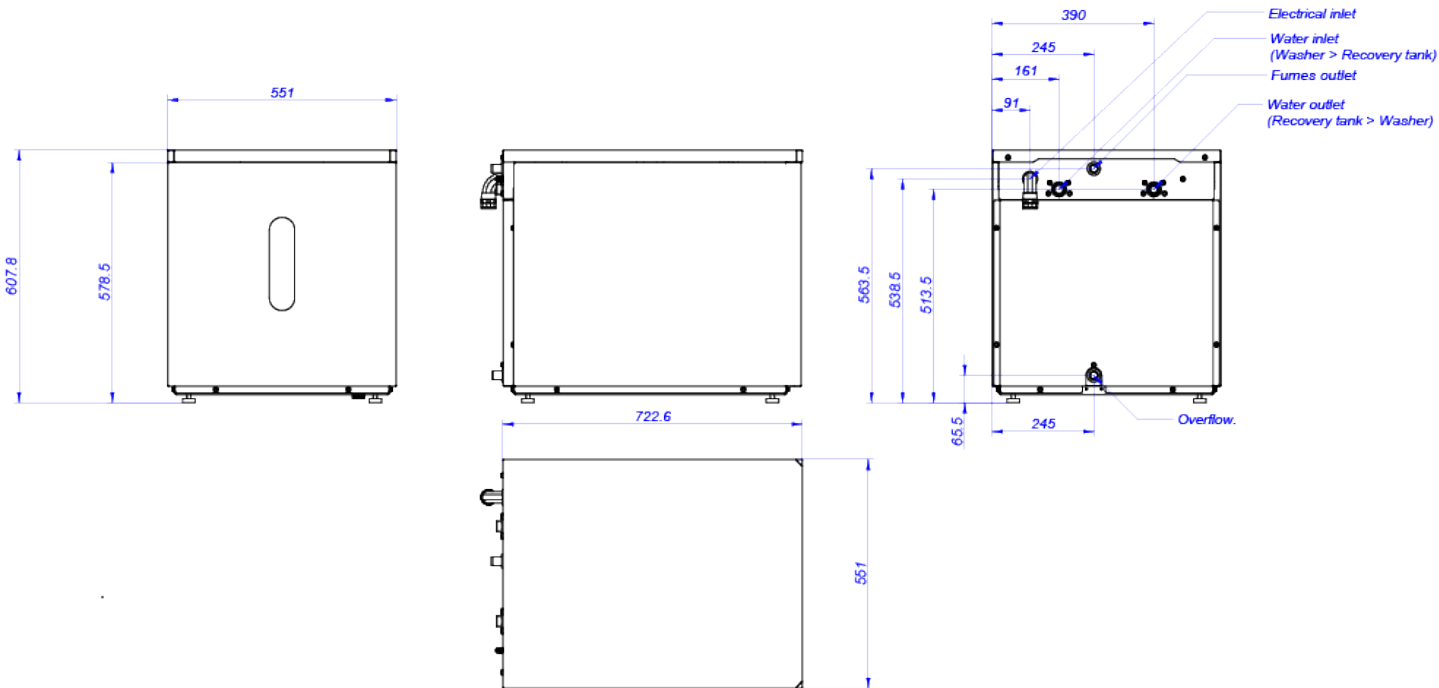



WATER RECOVERY

WATER RECOVERY TANKS KRS WREC-80 T2



CHARACTERISTICS

-
- 80 and 150 litre tanks to save the maximum amount of water in small spaces.
- Each washing machine or sanitary barrier can have between one and three tanks in column.
- Made of high density polyethylene and external reinforcement with skinplate panel structure, stainless steel aesthetics.
- Tank with rounded corners to prevent the accumulation of dirt and facilitate cleaning.

EFFICIENCY

- Up to 70% water saving.
- Up to 40% energy saving.
- Savings in detergents.

EASY INSTALLATION & MAINTENANCE

- Plug and play.
- Requires little space.
- Self-cleaning tanks with pre-set programmes (with washers equipped with TP2 control).
- Removable tanks for easy cleaning and maintenance.

OTHERS

- 1, 2 or 3 tanks.
- Grey skinplate panels.
- High density polyethylene tanks.
- 2 water level sensors in each tank.
- 80l tanks for washing machines from 11 to 18 kg and sanitary barriers from 16 kg.
- 150l tanks for 22 to 28 kg washing machines and 22 kg sanitary barriers.


OPTIONS

- Sanitary barrier kit LMED-16 for connection of 3/4' tanks WREC 1000. 3/4' WREC 1000 tanks.
- Sanitary barrier kit LMED-22 for connection 3/4' tanks WREC 1000. 3/4' tanks WREC 1000.
- Washing machine kit LA/LN-11/14/18/22/28 for connection 3/4' tanks WREC 1000. 3/4' tanks WREC 1000.

TECHNICAL DATA

WATER RECOVERY TANKS | KRS | WREC-80 T2

| | U. | WREC-80 T2 |
|-------------------------------------|------|---------------------|
| TANKS | | |
| Tanks | l | 80*2 |
| Washers capacities: front / barrier | Kg | 11, 14, 18 / 16, 22 |
| External panels | - | skinplate |
| Tank material | - | polyethylene |
| CONNECTIONS | | |
| Water inlet | inch | 3/4" |
| Water outlet | inch | 3/4" |
| Ø Fumes outlet | mm | 21 |
| Ø Drain | mm | 21 |
| Tension | V | 230V I |
| DIMENSIONS / PACKING DIMENSIONS | | |
| Net width / Gross width | mm | 551 / 570 |
| Net depth / Gross depth | mm | 722,6 / 800 |
| Net height / Gross height | mm | 1022.8 / 1.450 |
| Net weight / Gross weight | Kg | 60 / 80 |
| Volume | m³ | 0,661 |

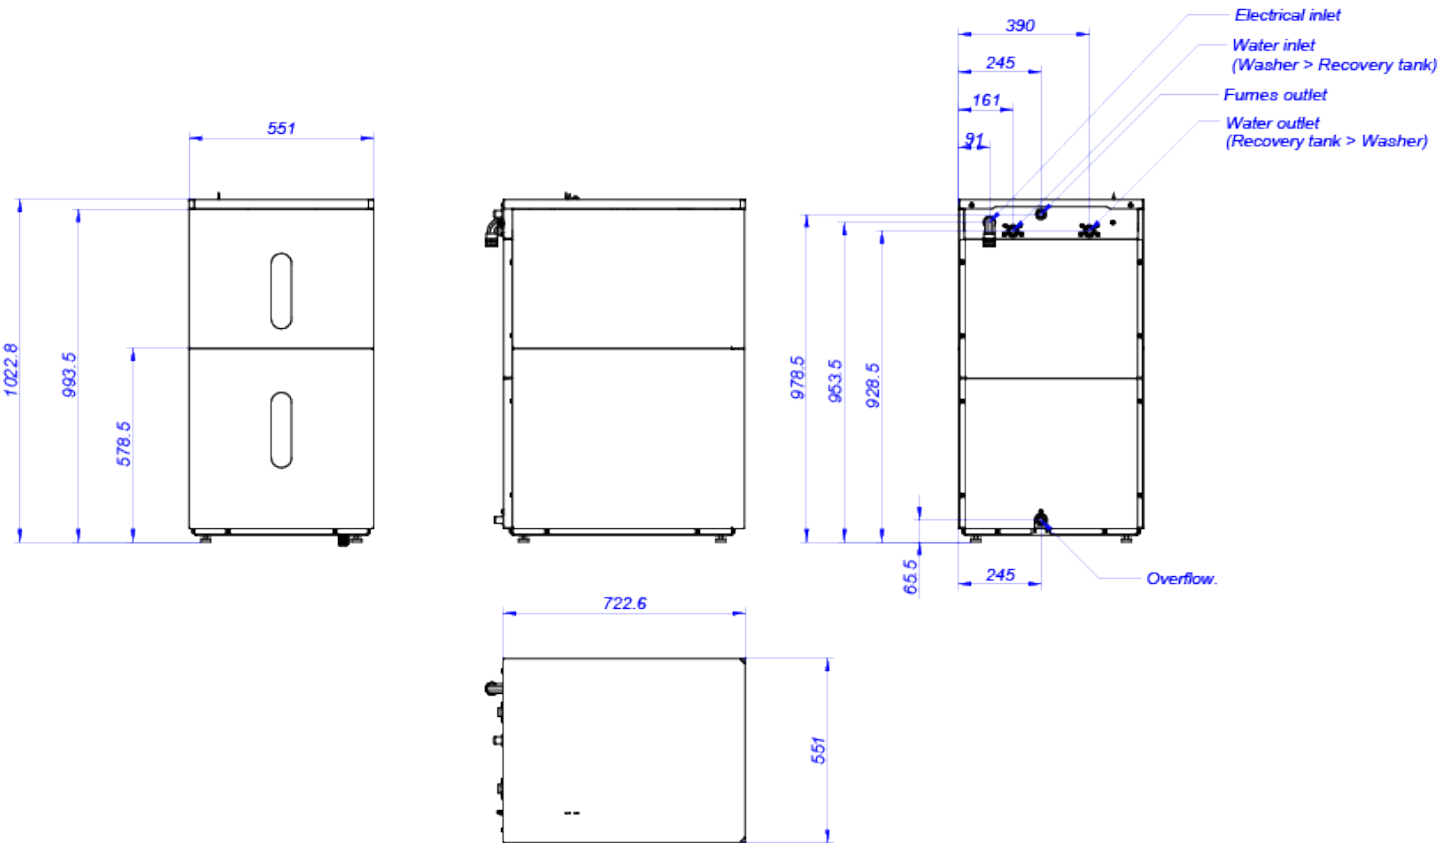



WATER RECOVERY

WATER RECOVERY TANKS KRS WREC-80 T3



CHARACTERISTICS

- 80 and 150 litre tanks to save the maximum amount of water in small spaces.
- Each washing machine or sanitary barrier can have between one and three tanks in column.
- Made of high density polyethylene and external reinforcement with skinplate panel structure, stainless steel aesthetics.
- Tank with rounded corners to prevent the accumulation of dirt and facilitate cleaning.

EFFICIENCY

- Up to 70% water saving.
- Up to 40% energy saving.
- Savings in detergents.

EASY INSTALLATION & MAINTENANCE

- Plug and play.
- Requires little space.
- Self-cleaning tanks with pre-set programmes (with washers equipped with TP2 control).
- Removable tanks for easy cleaning and maintenance.

OTHERS


- 1, 2 or 3 tanks.
- Grey skinplate panels.
- High density polyethylene tanks.
- 2 water level sensors in each tank.
- 80l tanks for washing machines from 11 to 18 kg and sanitary barriers from 16 kg.
- 150l tanks for 22 to 28 kg washing machines and 22 kg sanitary barriers.

OPTIONS

- Sanitary barrier kit LMED-16 for connection of 3/4' tanks WREC 1000. 3/4' WREC 1000 tanks.
- Sanitary barrier kit LMED-22 for connection 3/4' tanks WREC 1000. 3/4' tanks WREC 1000.
- Washing machine kit LA/LN-11/14/18/22/28 for connection 3/4' tanks WREC 1000. 3/4' tanks WREC 1000.

TECHNICAL DATA
 WATER RECOVERY TANKS | KRS | WREC-80 T3

| | U. | WREC-80 T3 |
|-------------------------------------|------|---------------------|
| TANKS | | |
| Tanks | I | 80*3 |
| Washers capacities: front / barrier | Kg | 11, 14, 18 / 16, 22 |
| External panels | - | skinplate |
| Tank material | - | polyethylene |
| CONNECTIONS | | |
| Water inlet | inch | 3/4" |
| Water outlet | inch | 3/4" |
| Ø Fumes outlet | mm | 21 |
| Ø Drain | mm | 21 |
| Tension | V | 230V I |
| DIMENSIONS / PACKING DIMENSIONS | | |
| Net width / Gross width | mm | 551 / 570 |
| Net depth / Gross depth | mm | 722,6 / 800 |
| Net height / Gross height | mm | 1.437,8 / 1.850 |
| Net weight / Gross weight | Kg | 80 / 100 |
| Volume | m³ | 0,844 |

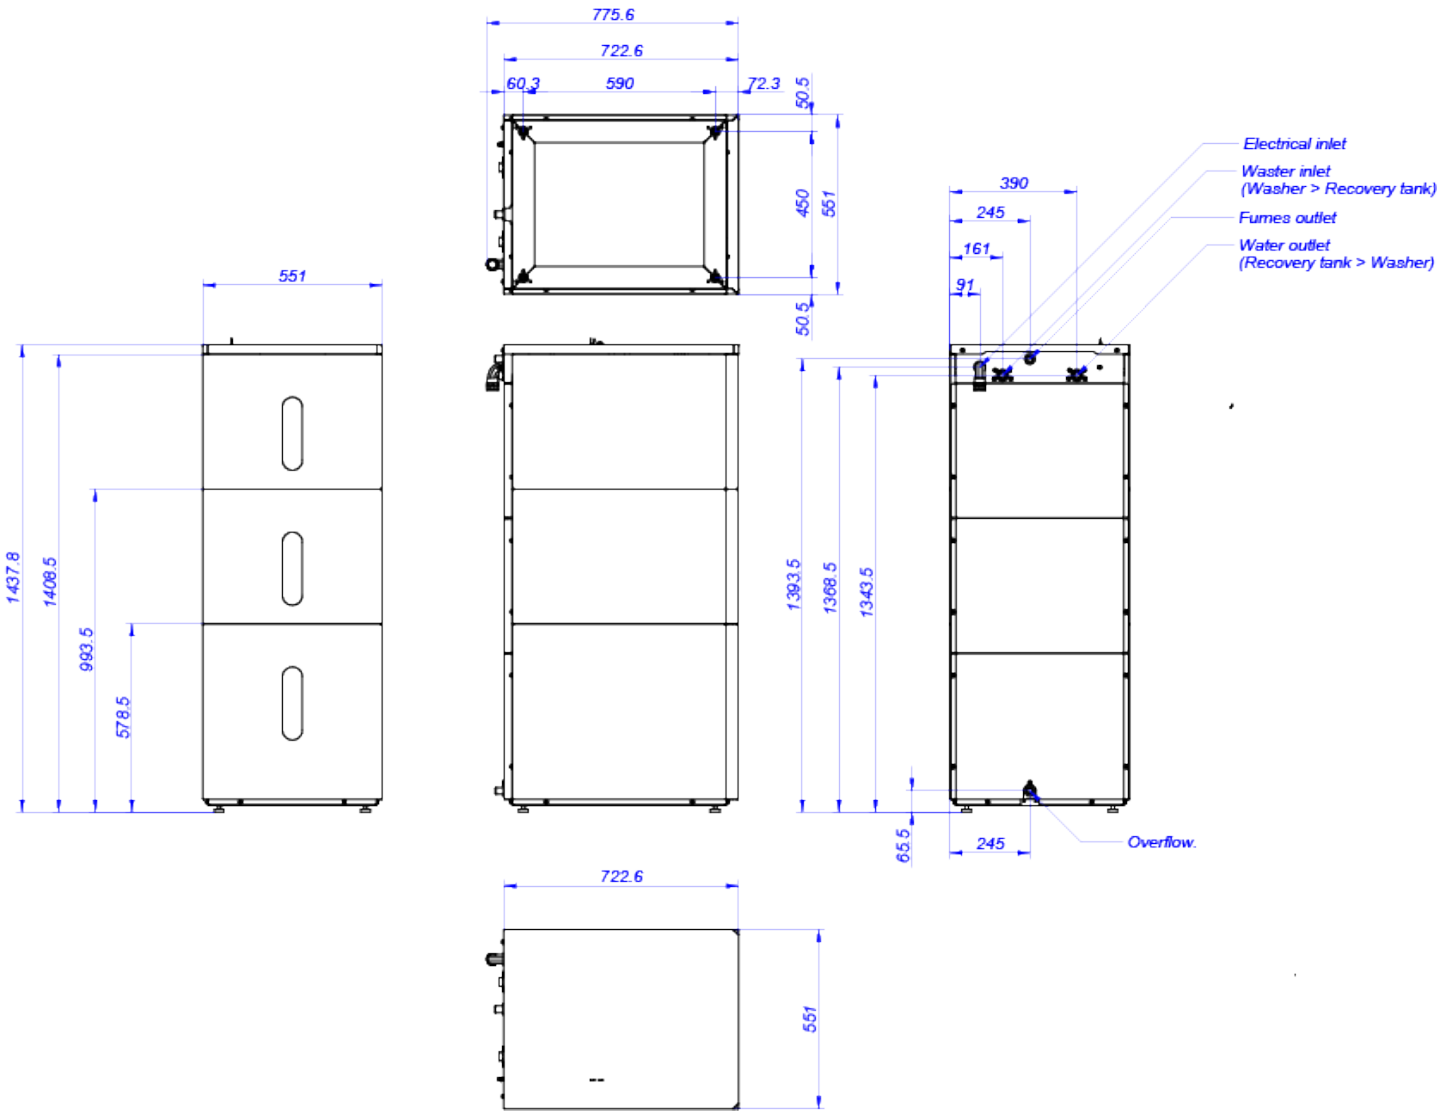



WATER RECOVERY

WATER RECOVERY TANKS KRS WREC-150 T1

CHARACTERISTICS

- 80 and 150 litre tanks to save the maximum amount of water in small spaces.
- Each washing machine or sanitary barrier can have between one and three tanks in column.
- Made of high density polyethylene and external reinforcement with skinplate panel structure, stainless steel aesthetics.
- Tank with rounded corners to prevent the accumulation of dirt and facilitate cleaning.

EFFICIENCY

- Up to 70% water saving.
- Up to 40% energy saving.
- Savings in detergents.

EASY INSTALLATION & MAINTENANCE

- Plug and play.
- Requires little space.
- Self-cleaning tanks with pre-set programmes (with washers equipped with TP2 control).
- Removable tanks for easy cleaning and maintenance.

OTHERS

- 1, 2 or 3 tanks.
- Grey skinplate panels.
- High density polyethylene tanks.
- 2 water level sensors in each tank.
- 80l tanks for washing machines from 11 to 18 kg and sanitary barriers from 16 kg.
- 150l tanks for 22 to 28 kg washing machines and 22 kg sanitary barriers.

OPTIONS


- Sanitary barrier kit LMED-16 for connection of 3/4' tanks WREC 1000. 3/4' WREC 1000 tanks.
- Sanitary barrier kit LMED-22 for connection 3/4' tanks WREC 1000. 3/4' tanks WREC 1000.
- Washing machine kit LA/LN-11/14/18/22/28 for connection 3/4' tanks WREC 1000. 3/4' tanks WREC 1000.



TECHNICAL DATA

WATER RECOVERY TANKS | KRS | WREC-150 T1

| | U. | WREC-150 T1 |
|-------------------------------------|------|-----------------|
| TANKS | | |
| Tanks | l | 150*1 |
| Washers capacities: front / barrier | Kg | 27, 35 / 27, 35 |
| External panels | - | skinplate |
| Tank material | - | polyethylene |
| CONNECTIONS | | |
| Water inlet | inch | 3/4" |
| Water outlet | inch | 3/4" |
| Ø Fumes outlet | mm | 21 |
| Ø Drain | mm | 21 |
| Tension | V | 230V I |
| DIMENSIONS / PACKING DIMENSIONS | | |
| Net width / Gross width | mm | 551 / 570 |
| Net depth / Gross depth | mm | 1272,6 / 1.350 |
| Net height / Gross height | mm | 607,3/ 1.050 |
| Net weight / Gross weight | Kg | 60 / 80 |
| Volume | m³ | 0,808 |

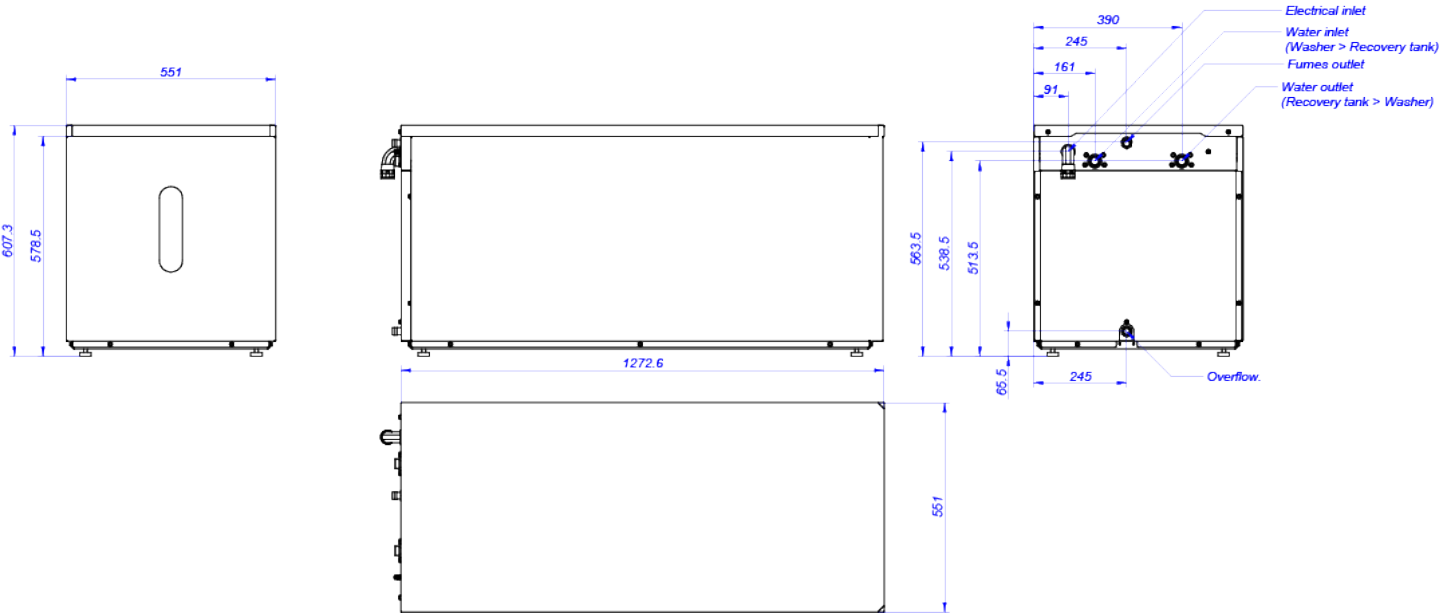



WATER RECOVERY

WATER RECOVERY TANKS KRS WREC-150 T2

CHARACTERISTICS

-
- 80 and 150 litre tanks to save the maximum amount of water in small spaces.
- Each washing machine or sanitary barrier can have between one and three tanks in column.
- Made of high density polyethylene and external reinforcement with skinplate panel structure, stainless steel aesthetics.
- Tank with rounded corners to prevent the accumulation of dirt and facilitate cleaning.

EFFICIENCY

- Up to 70% water saving.
- Up to 40% energy saving.
- Savings in detergents.

EASY INSTALLATION & MAINTENANCE

- Plug and play.
- Requires little space.
- Self-cleaning tanks with pre-set programmes (with washers equipped with TP2 control).
- Removable tanks for easy cleaning and maintenance.

OTHERS

- 1, 2 or 3 tanks.
- Grey skinplate panels.
- High density polyethylene tanks.
- 2 water level sensors in each tank.
- 80l tanks for washing machines from 11 to 18 kg and sanitary barriers from 16 kg.
- 150l tanks for 22 to 28 kg washing machines and 22 kg sanitary barriers.

OPTIONS


- Sanitary barrier kit LMED-16 for connection of 3/4' tanks WREC 1000. 3/4' WREC 1000 tanks.
- Sanitary barrier kit LMED-22 for connection 3/4' tanks WREC 1000. 3/4' tanks WREC 1000.
- Washing machine kit LA/LN-11/14/18/22/28 for connection 3/4' tanks WREC 1000. 3/4' tanks WREC 1000.



TECHNICAL DATA

WATER RECOVERY TANKS | KRS | WREC-150 T2

| | U. | WREC 150 T2 |
|-------------------------------------|------|-----------------|
| TANKS | | |
| Tanks | l | 150*2 |
| Washers capacities: front / barrier | Kg | 27, 35 / 27, 35 |
| External panels | - | skinplate |
| Tank material | - | polyethylene |
| CONNECTIONS | | |
| Water inlet | inch | 3/4" |
| Water outlet | inch | 3/4" |
| Ø Fumes outlet | mm | 21 |
| Ø Drain | mm | 21 |
| Tension | V | 230V I |
| DIMENSIONS / PACKING DIMENSIONS | | |
| Net width / Gross width | mm | 551 / 570 |
| Net depth / Gross depth | mm | 1.272.6 / 1.350 |
| Net height / Gross height | mm | 1.022,3 / 1.450 |
| Net weight / Gross weight | Kg | 60 / 80 |
| Volume | m³ | 1,116 |

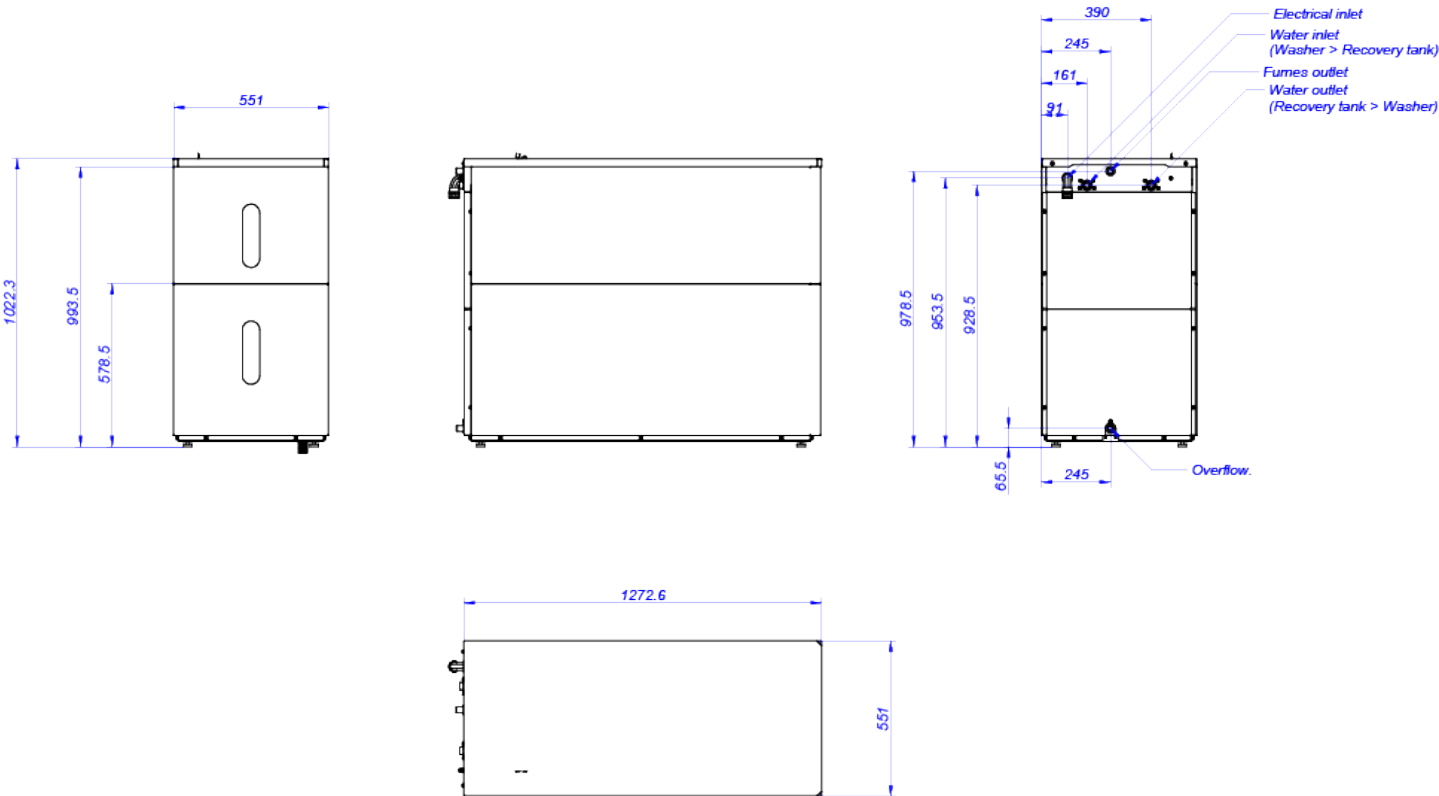



WATER RECOVERY

WATER RECOVERY TANKS KRS WREC-150 T3

CHARACTERISTICS

- 80 and 150 litre tanks to save the maximum amount of water in small spaces.
- Each washing machine or sanitary barrier can have between one and three tanks in column.
- Made of high density polyethylene and external reinforcement with skinplate panel structure, stainless steel aesthetics.
- Tank with rounded corners to prevent the accumulation of dirt and facilitate cleaning.

EFFICIENCY

- Up to 70% water saving.
- Up to 40% energy saving.
- Savings in detergents.

EASY INSTALLATION & MAINTENANCE

- Plug and play.
- Requires little space.
- Self-cleaning tanks with pre-set programmes (with washers equipped with TP2 control).
- Removable tanks for easy cleaning and maintenance.

OTHERS

- 1, 2 or 3 tanks.
- Grey skinplate panels.
- High density polyethylene tanks.
- 2 water level sensors in each tank.
- 80l tanks for washing machines from 11 to 18 kg and sanitary barriers from 16 kg.
- 150l tanks for 22 to 28 kg washing machines and 22 kg sanitary barriers.

OPTIONS


- Sanitary barrier kit LMED-16 for connection of 3/4' tanks WREC 1000. 3/4' WREC 1000 tanks.
- Sanitary barrier kit LMED-22 for connection 3/4' tanks WREC 1000. 3/4' tanks WREC 1000.
- Washing machine kit LA/LN-11/14/18/22/28 for connection 3/4' tanks WREC 1000. 3/4' tanks WREC 1000.




TECHNICAL DATA

WATER RECOVERY TANKS | KRS | WREC-150 T3

| | U. | WREC-150 T3 |
|-------------------------------------|------|-----------------|
| TANKS | | |
| Tanks | l | 150*3 |
| Washers capacities: front / barrier | Kg | 27, 35 / 27, 35 |
| External panels | - | skinplate |
| Tank material | - | polyethylene |
| CONNECTIONS | | |
| Water inlet | inch | 3/4" |
| Water outlet | inch | 3/4" |
| Ø Fumes outlet | mm | 21 |
| Ø Drain | mm | 21 |
| Tension | | |
| DIMENSIONS / PACKING DIMENSIONS | | |
| Net width / Gross width | mm | 551 / 570 |
| Net depth / Gross depth | mm | 1.272,6 / 1.350 |
| Net height / Gross height | mm | 1.437,8 / 1.850 |
| Net weight / Gross weight | Kg | 80 / 100 |
| Volume | m³ | 1,424 |

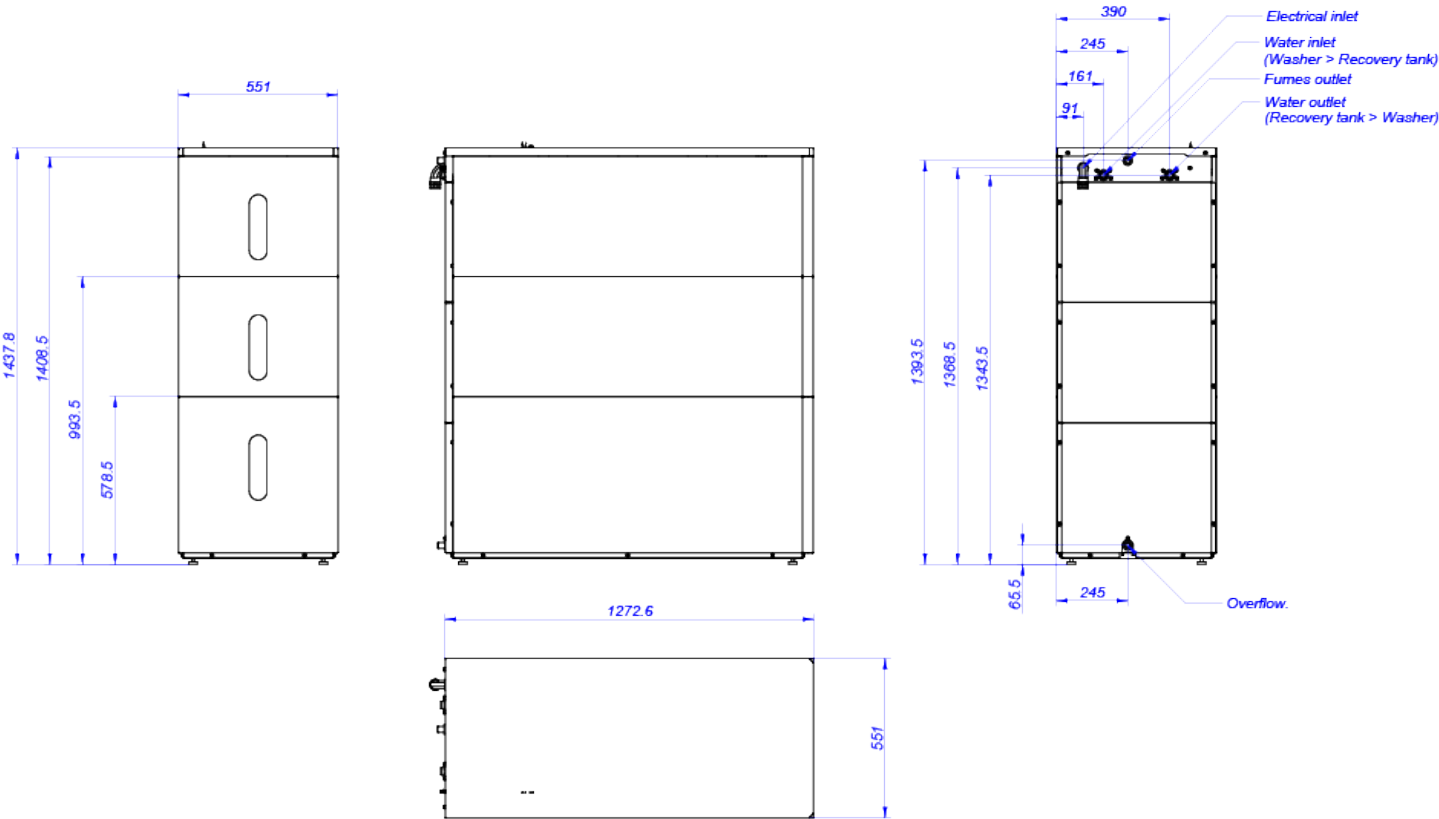



WATER RECOVERY

WATER RECOVERY TANKS KRS WREC-1000



CHARACTERISTICS

- 1,000 litre centralised tanks, from 1 to 3 tanks, for one or several machines from 35 to 120 kg.
- Large capacity models ideal for industrial laundries with large capacity washing machines.
- Combinable:
Different WREC-1000 can be combined with different Domus machines with TOUCH II:
 - 1 or more machines to the WREC-1000.
 - 1, 2 or 3 WREC-1000 tanks.
- Resistant: Made of high density polyethylene and external reinforcement with galvanised steel structure.

EFFICIENCY

- Up to 70% water savings.
- Up to 40% energy saving.
- Savings in detergent.

EASY INSTALLATION & MAINTENANCE

- Easily connected with a 1" valve.
- Self-cleaning programmes.
- Fixing: Incorporates holes for easy anchoring to the floor.
- Accessory kit available: For easy connection of washers and barriers with tanks (option).
- 2 water level sensors.

OTHERS

- 1, 2 or 3 tanks of 1000 litres each.
- One or more washing machines can be connected so that the wash water can be reused.
- Sold separately.
- No external panels, only the frame.
- Connections not included with the tank

OPTIONS

- 1" connection kit from LBS-27/35/50/70/100 barriers to WREC-1000.
- 1" connection kit from LA/LN-35C/45C/45C/60C/80C washers to WREC-1000.
- 1" connection kit from washing machines LA-100C/120C to WREC-1000.
- Raised platform.
- Mounting accessories kit.

MACHINES THAN CAN BE CONNECTED

Up to 8 of 35/45 kg washers
Up to 4 of 60/80 kg washers
Up to 3 of 100/120 kg washers



TECHNICAL DATA

WATER RECOVERY TANKS | KRS | WREC-1000

| | U. | WREC-1000 |
|-------------------------------------|------|------------------------------------------------|
| TANKS | | |
| Tanks | l | 1000 |
| Washers capacities: front / barrier | Kg | 35, 45, 60, 80, 100, 120 / 27, 35, 50, 70, 100 |
| External panels | - | skinplate |
| Tank material | - | polyethylene |
| CONNECTIONS | | |
| Water inlet | inch | 1" |
| Water outlet | inch | 1" |
| Ø Fumes outlet | mm | 70 |
| Ø Drain | inch | 1" |
| Tension | V | 230V I |
| DIMENSIONS / PACKING DIMENSIONS | | |
| Net width / Gross width | mm | 800 / 800 |
| Net depth / Gross depth | mm | 1.450 / 1.450 |
| Net height / Gross height | mm | 2.206 / 2.262 |
| Net weight / Gross weight | Kg | 147 / 173 |

