




IRONING AND FOLDING

FLATWORK IRONERS ROLLER Ø 500 PSP-50-200/260/330 TP2

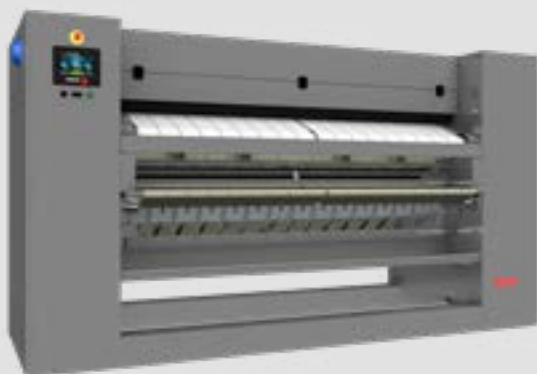

CHARACTERISTICS

TP2

- TP2 microprocessor, 7" touch screen, easy to use and fully programmable.
- Free online platform for programming, telemetry, data analysis... thanks to IoT. USB connection.
- 37 languages 5 preset programs.

EFFICIENCY

- Good heat conduction thanks to the material and thickness of the roll: greater control of energy consumption.
- Automatic switch-off at 80°C (adjustable parameter).
- Smoke circulation circuit at the bottom to reduce energy consumption.
- Model with radiant burner: 25% more productive.
- Automatic regulation of the ironing speed according to the residual humidity as standard.
- High production system, speed ironing up to 15m/min as standard (not compatible with folder).

VERSATILITY

- Radiant gas model: flexible, suitable for high altitude installations.
- Optional built-in longitudinal folder with or without rear exit option.

ROBUSTNESS

- Inverter roller.
- Nomex quality ironing belts: resistant to high temperatures.
- Grey skinplate panels.
- Nickel-plated roller as an option: anti-corrosive, more durable.
- Reinforced mechanical structure.

ERGONOMICS

- Acoustic comfort : <65 dB
- Suitable working height: 1170 mm feed belts.
- Compact design to save space.

MAINTENANCE

- Easy access to all components on both sides of the machine.
- Connections : electrical connection and air extraction.
- Complete technical menu: statistics, self-test, data retrieval for technician and maintenance.
- Remote communication: faster intervention.

OTHERS

- Dries and irons flat linen from a high spin washer in a single operation.
- Front feed and return.
- Built-in cooling system.
- Polished steel roller Ø 500 mm.
- Working widths: 2000, 2600 and 3300 mm.
- Electric, radiant gas or steam heating. CE certified.

OPTIONS

- Nickel-plated roller (except steam model).
- Propane gas for radiant gas model.
- Natural gas for radiant gas model.
- Longitudinal folder (front outlet).
- Longitudinal folder (front and rear outlet).
- Standard rear outlet (model without folder).
- Antistatic ironing belts without folder.
- Antistatic ironing belts + folder bar.
- Cross folder.
- Hygienic tray to avoid contact between clothes and the floor.
- Wooden maritime packaging.






TECHNICAL DATA

FLATWORK IRONERS | ROLLER Ø 500 | PSP-50-200/260/330 TP2

		UNIT	PSP-50-200 TP2	PSP-50-260 TP2	PSP-50-330 TP2			
GENERAL DETAILS								
Theoretical production (electric heating)*		Kg/h	68	84	115			
		Lb/h	150	185	254			
Theoretical production (gas atmo heating)*		Kg/h	68	84	115			
		Lb/h	150	185	254			
Theoretical production (radiant gas heating)*		Kg/h	82	100	138			
		Lb/h	181	220	304			
Theoretical production (steam heating)*		Kg/h	68	84	115			
		Lb/h	150	185	254			
Roll Ø		mm	500	500	500			
		inch	19,69	19,69	19,69			
Working width		mm	2000	2600	3300			
		inch	78,74	102,36	129,92			
Heigh floor-feeding belts		mm	1170	1170	1170			
		inch	46,06	46,06	46,06			
Working speed		m/min	0,5-8	0,5-8	0,5-8			
		ft/min	1,6-26	1,6-26	1,6-26			
Electronic control			Yes	Yes	Yes			
N° Programs		N°	5	5	5			
Rear exit without folding			Opt.	Opt.	Opt.			
Lenght folder - Front exit			Opt.	Opt.	Opt.			
Lenght folder - Rear exit			Opt.	Opt.	Opt.			
Hygienic tray			Opt.	Opt.	Opt.			
Large surface contact with linen			305	305	305			
POWER								
Electric	Heating power	kW	31,5	40,5	54			
	Total electric power	kW	32,16	41,41	54,91			
Gas	Heating power	kW	40	55	69			
	Total electric power	kW	0,62	0,87	0,87			
Steam	Heating power	kW	50	64	81			
	Total electric power	kW	0,62	0,87	0,87			
	Steam consupcion	Kg/h	50	67	85			
Roll motor power		kW	0,41	0,41	0,41			
Fan motor power		kW	0,25	0,25 x 2	0,25 x 2			
CONNECTIONS			ELECTRIC	STEAM/ GAS	ELECTRIC	STEAM/ GAS	ELECTRIC	STEAM/ GAS
Tension 230V - I + N + T		n° x mm²/A	N/A	3 x 2,5 / 10A	N/A	3 x 2,5 / 10A	N/A	3 x 2,5 / 10A
		n° x AWG/A	N/A	3 x 13 / 10A	N/A	3 x 13 / 10A	N/A	3 x 13 / 10A
Tension 230V - III + T		n° x mm²/A	4 x 25 /100A	4 x 2,5 / 10A	4 x 25 /125A	4 x 2,5 / 10A	4 x 35 /160A	4 x 2,5 / 10A
		n° x AWG/A	4 x 3 / 100A	4 x 13 / 10A	4 x 3 / 125A	4 x 13 / 10A	4 x 2 / 160A	4 x 13 / 10A
Tension 400V - III + N + T		n° x mm²/A	5 x 16 / 63A	5 x 2,5 / 10A	5 x 16 / 80A	5 x 2,5 / 10A	5 x 25 /100A	5 x 2,5 / 10A
		n° x AWG/A	5 x 5 / 63A	5 x 13 / 10A	5 x 5 / 80A	5 x 13 / 10A	5 x 3 / 100A	5 x 13 / 10A
Ø Gas inlet		BSP	1"	1"		1"		
Ø Steam inlet		BSP	3/4"	3/4"		3/4"		
Ø Condensed (Steam models)		BSP	1/2"	1/2"		1/2"		
DIMENSIONS / DIMENSIONS WITH PACKAGING								
Net width / Gross width		mm	3110 / 3290		3710 / 3890		4410 / 4590	
		inch	122,4 / 129,5		146,1 / 153,1		173,6 / 180,7	
Net depth / Gross depth		mm	1175 / 1360		1175 / 1360		1175 / 1360	
		inch	46,3 / 53,5		46,3 / 53,5		46,3 / 53,5	
Net height / Gross height		mm	1780 / 1940		1780 / 1940		1780 / 1940	
		inch	70,1 / 76,4		70,1 / 76,4		70,1 / 76,4	
Net weight / Gross weight		Kg	1130 / 1190		1380 / 1460		1630 / 1730	
		Lb	2491 / 2624		3042 / 3219		3594 / 3814	
Volume		m3	6,50 / 8,68		7,76 / 10,26		9,22 / 12,11	
		f3	230 / 307		274 / 362		326 / 428	

*45 % moisture

OTHERS				
No. Fume outlet	N°	1	2	2
Ø Fume outlet	mm	153	153	153
	inch	6,0	6,0	6,0
Air flow	m3/h	600	1200	1200
	cfm	353	706	706
Noise level	dB	65	65	65
	l/h	37	45	62
Evaporation power	USgallon/h	9,7	11,9	16,4
Additional ELECTRIC POWER for opt. STD rear exit	kW	0,13	0,13	0,13
Additional ELECTRIC POWER for opt. folder front exit option	kW	0,23	0,23	0,23
Additional ELECTRIC POWER for folder rear exit option	kW	0,1	0,1	0,1
Additional ELECTRIC POWER for folder front + rear exit option	kW	0,33	0,33	0,33

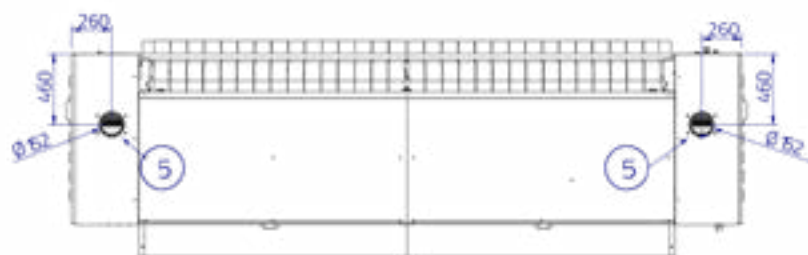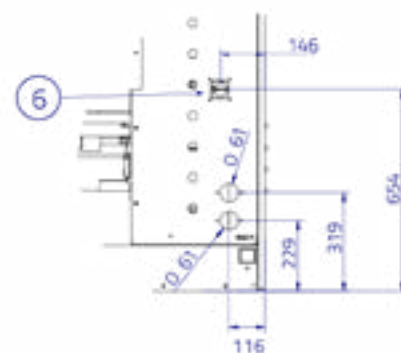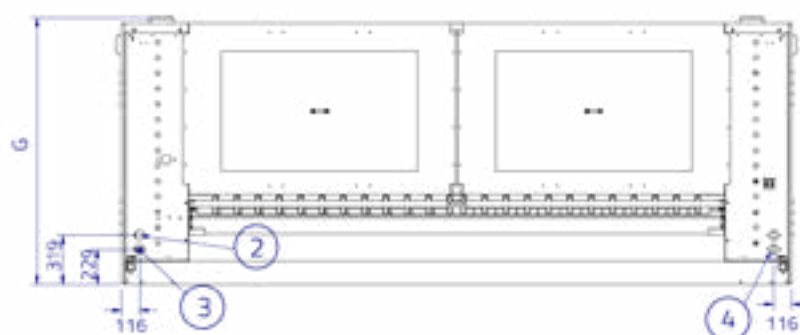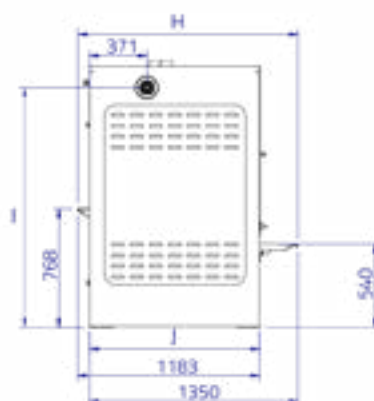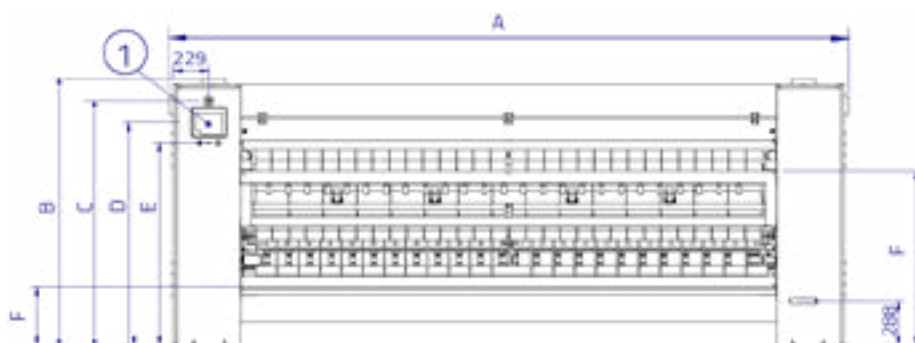


- 01. Control panel
- 02. Steam outlet $\phi 1/2"$
- 03. Gas inlet $\phi 22$ or steam inlet $\phi 3/4"$
- 04. Power supply
- 05. $\phi 152$ steam extraction
- 06. Disconnecter

	A	B	C	D	E	F	G	H	I	J
PSP-50-200 TP2	3110	1729	1584	1445	1313	1130	1729	1428	1553	1101
PSP-50-260 TP2	3710	1729	1584	1445	1313	1130	1729	1428	1553	1101
PSP-50-330 TP2	4410	1729	1584	1445	1313	1130	1729	1428	1553	1101

This machine must be installed on a perfectly level floor.

This machine can be placed against a wall, but for ease of maintenance, it is best to leave a 1500mm space.



IRONING AND FOLDING

FLATWORK IRONERS ROLLER Ø 500 PSP-50-200/260/330 TP2

CHARACTERISTICS

TP2

- TP2 microprocessor, 7" touch screen, easy to use and fully programmable.
- Free online platform for programming, telemetry, data analysis... thanks to IoT. USB connection.
- 37 languages 5 preset programs.

EFFICIENCY

- Good heat conduction thanks to the material and thickness of the roll: greater control of energy consumption.
- Automatic switch-off at 80°C (adjustable parameter).
- Smoke circulation circuit at the bottom to reduce energy consumption.
- Model with radiant burner: 25% more productive.
- Automatic regulation of the ironing speed according to the residual humidity as standard.
- High production system, speed ironing up to 15m/min as standard (not compatible with folder).

VERSATILITY

- Radiant gas model: flexible, suitable for high altitude installations.
- Optional built-in longitudinal folder with or without rear exit option.

ROBUSTNESS

- Inverter roller.
- Nomex quality ironing belts: resistant to high temperatures.
- Grey skinplate panels.
- Nickel-plated roller as an option: anti-corrosive, more durable.
- Reinforced mechanical structure.

ERGONOMICS

- Acoustic comfort : <65 dB
- Suitable working height: 1170 mm feed belts.
- Compact design to save space.

MAINTENANCE


- Easy access to all components on both sides of the machine.
- Connections : electrical connection and air extraction.
- Complete technical menu: statistics, self-test, data retrieval for technician and maintenance.
- Remote communication: faster intervention.

OTHERS

- Dries and irons flat linen from a high spin washer in a single operation.
- Front feed and return.
- Built-in cooling system.
- Polished steel roller Ø 500 mm.
- Working widths: 2000, 2600 and 3300 mm.
- Electric, radiant gas or steam heating. CE certified.

OPTIONS

- Nickel-plated roller (except steam model).
- Propane gas for radiant gas model.
- Natural gas for radiant gas model.
- Longitudinal folder (front outlet).
- Longitudinal folder (front and rear outlet).
- Standard rear outlet (model without folder).
- Antistatic ironing belts without folder.
- Antistatic ironing belts + folder bar.
- Cross folder.
- Hygienic tray to avoid contact between clothes and the floor.
- Wooden maritime packaging.

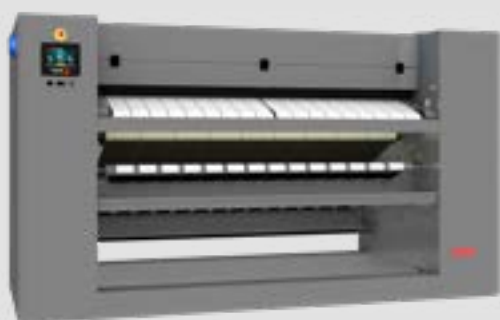

STD RE






TECHNICAL DATA

FLATWORK IRONERS | ROLLER Ø 500 | PSP-50-200/260/330 TP2

		UNIT	PSP-50-200 TP2	PSP-50-260 TP2	PSP-50-330 TP2			
GENERAL DETAILS								
Theoretical production (electric heating)*		Kg/h	68	84	115			
		Lb/h	150	185	254			
Theoretical production (gas atmo heating)*		Kg/h	68	84	115			
		Lb/h	150	185	254			
Theoretical production (radiant gas heating)*		Kg/h	82	100	138			
		Lb/h	181	220	304			
Theoretical production (steam heating)*		Kg/h	68	84	115			
		Lb/h	150	185	254			
Roll Ø		mm	500	500	500			
		inch	19,69	19,69	19,69			
Working width		mm	2000	2600	3300			
		inch	78,74	102,36	129,92			
Heigh floor-feeding belts		mm	1170	1170	1170			
		inch	46,06	46,06	46,06			
Working speed		m/min	0,5-8	0,5-8	0,5-8			
		ft/min	1,6-26	1,6-26	1,6-26			
Electronic control			Yes	Yes	Yes			
N° Programs		N°	5	5	5			
Rear exit without folding			Yes	Yes	Yes			
Lenght folder - Front exit			Opt.	Opt.	Opt.			
Lenght folder - Rear exit			Opt.	Opt.	Opt.			
Hygienic tray			Opt.	Opt.	Opt.			
Large surface contact with linen			305	305	305			
POWER								
Electric	Heating power	kW	31,5	40,5	54			
	Total electric power	kW	32,29	41,41	55,04			
Gas	Heating power	kW	40	55	69			
	Total electric power	kW	0,75	1	1			
Steam	Heating power	kW	50	64	81			
	Total electric power	kW	0,75	1	1			
	Steam consupcion	Kg/h	50	67	85			
Roll motor power		kW	0,41	0,41	0,41			
Fan motor power		kW	0,25	0,25 x 2	0,25 x 2			
CONNECTIONS			ELECTRIC	STEAM/ GAS	ELECTRIC	STEAM/ GAS	ELECTRIC	STEAM/ GAS
Tension 230V - I + N + T	n° x mm²/A		N/A	3 x 2,5 / 10A	N/A	3 x 2,5 / 10A	N/A	3 x 2,5 / 10A
	n° x AWG/A		N/A	3 x 13 / 10A	N/A	3 x 13 / 10A	N/A	3 x 13 / 10A
Tension 230V - III + T	n° x mm²/A		4 x 25 /100A	4 x 2,5 / 10A	4 x 25 /125A	4 x 2,5 / 10A	4 x 35 /160A	4 x 2,5 / 10A
	n° x AWG/A		4 x 3 / 100A	4 x 13 / 10A	4 x 3 / 125A	4 x 13 / 10A	4 x 2 / 160A	4 x 13 / 10A
Tension 400V - III + N + T	n° x mm²/A		5 x 16 / 63A	5 x 2,5 / 10A	5 x 16 / 80A	5 x 2,5 / 10A	5 x 25 /100A	5 x 2,5 / 10A
	n° x AWG/A		5 x 5 / 63A	5 x 13 / 10A	5 x 5 / 80A	5 x 13 / 10A	5 x 3 / 100A	5 x 13 / 10A
Ø Gas inlet	BSP		1"		1"		1"	
Ø Steam inlet	BSP		3/4"		3/4"		3/4"	
Ø Condensed (Steam models)	BSP		1/2"		1/2"		1/2"	
DIMENSIONS / DIMENSIONS WITH PACKAGING								
Net width / Gross width	mm		3110 / 3290		3710 / 3890		4410 / 4590	
	inch		122,4 / 129,5		146,1 / 153,1		173,6 / 180,7	
Net depth / Gross depth	mm		1175 / 1360		1175 / 1360		1175 / 1360	
	inch		46,3 / 53,5		46,3 / 53,5		46,3 / 53,5	
Net height / Gross height	mm		1780 / 1940		1780 / 1940		1780 / 1940	
	inch		70,1 / 76,4		70,1 / 76,4		70,1 / 76,4	
Net weight / Gross weight	Kg		1160 / 1220		1420 / 1500		1680 / 1780	
	Lb		2557 / 2690		3131 / 3307		3704 / 3924	
Volume	m3		6,50 / 8,68		7,76 / 10,26		9,22 / 12,11	
	f3		230 / 307		274 / 362		326 / 428	

*45 % moisture

OTHERS				
No. Fume outlet	N°	1	2	2
Ø Fume outlet	mm	153	153	153
	inch	6,0	6,0	6,0
Air flow	m3/h	600	1200	1200
	cfm	353	706	706
Noise Level	dB	65	65	65
	l/h	37	45	62
Evaporation powe	USgallon/h	9,7	11,9	16,4
Additional ELECTRIC POWER for opt. STD rear exit	kW	0,13	0,13	0,13
Additional ELECTRIC POWER for opt. folder front exit option	kW	0,23	0,23	0,23
Additional ELECTRIC POWER for folder rear exit option	kW	0,1	0,1	0,1
Additional ELECTRIC POWER for folder front + rear exit option	kW	0,33	0,33	0,33

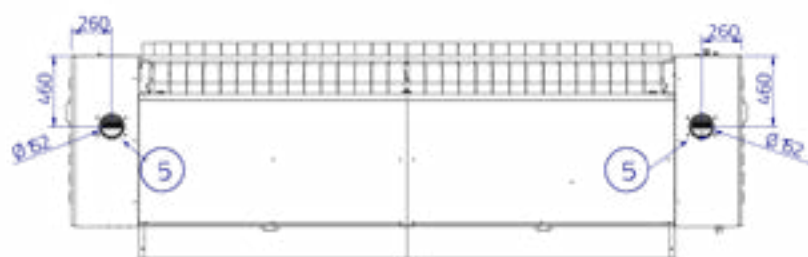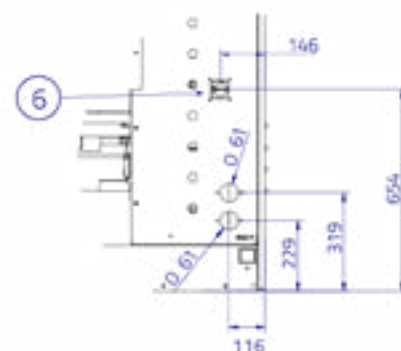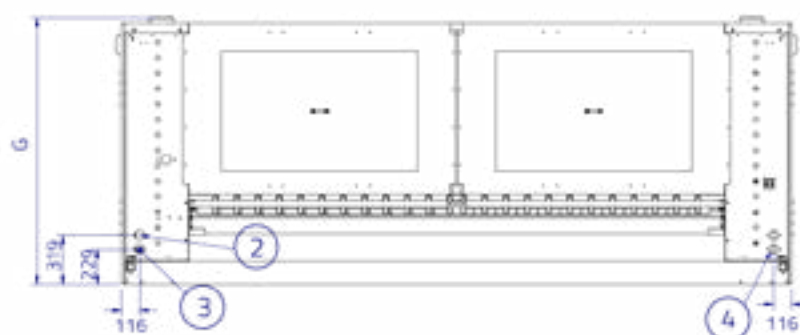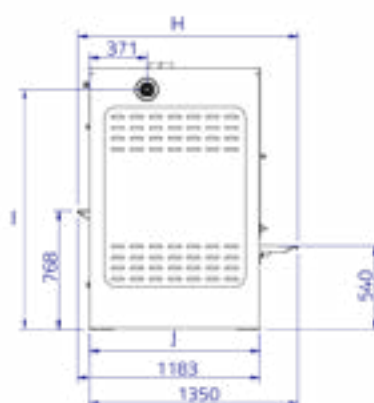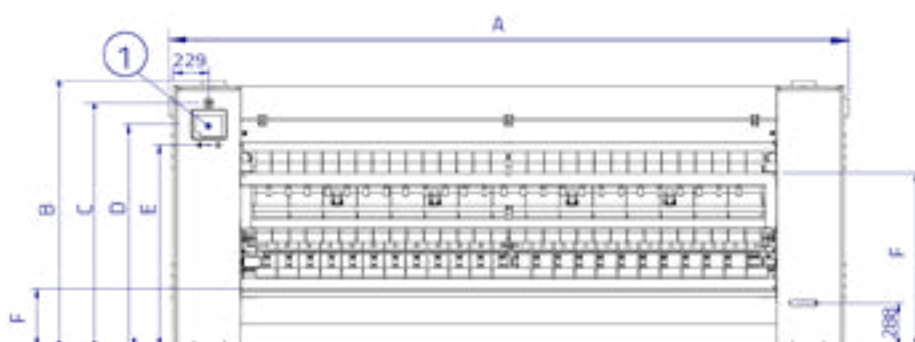

- 01. Control panel
- 02. Steam outlet $\phi 1/2"$
- 03. Gas inlet $\phi 22$ or steam inlet $\phi 3/4"$
- 04. Power supply
- 05. $\phi 152$ steam extraction
- 06. Disconnector

	A	B	C	D	E	F	G	H	I	J
PSP-50-200 TP2	3110	1729	1584	1445	1313	1130	1729	1428	1553	1101
PSP-50-260 TP2	3710	1729	1584	1445	1313	1130	1729	1428	1553	1101
PSP-50-330 TP2	4410	1729	1584	1445	1313	1130	1729	1428	1553	1101

This machine must be installed on a perfectly level floor.

This machine can be placed against a wall, but for ease of maintenance, it is best to leave a 1500mm space.



IRONING AND FOLDING

FLATWORK IRONERS ROLLER Ø 500 PSP-50-200/260/330 TP2



FOLDER FE

CHARACTERISTICS

TP2

- TP2 microprocessor, 7" touch screen, easy to use and fully programmable.
- Free online platform for programming, telemetry, data analysis... thanks to IoT. USB connection.
- 37 languages 5 preset programs.

EFFICIENCY

- Good heat conduction thanks to the material and thickness of the roll: greater control of energy consumption.
- Automatic switch-off at 80°C (adjustable parameter).
- Smoke circulation circuit at the bottom to reduce energy consumption.
- Model with radiant burner: 25% more productive.
- Automatic regulation of the ironing speed according to the residual humidity as standard.
- High production system, speed ironing up to 15m/min as standard (not compatible with folder).

VERSATILITY

- Radiant gas model: flexible, suitable for high altitude installations.
- Optional built-in longitudinal folder with or without rear exit option.

ROBUSTNESS

- Inverter roller.
- Nomex quality ironing belts: resistant to high temperatures.
- Grey skinplate panels.
- Nickel-plated roller as an option: anti-corrosive, more durable.
- Reinforced mechanical structure.

ERGONOMICS

- Acoustic comfort : <65 dB
- Suitable working height: 1170 mm feed belts.
- Compact design to save space.

MAINTENANCE

- Easy access to all components on both sides of the machine.
- Connections : electrical connection and air extraction.
- Complete technical menu: statistics, self-test, data retrieval for technician and maintenance.
- Remote communication: faster intervention.

OTHERS

- Dries and irons flat linen from a high spin washer in a single operation.
- Front feed and return.
- Built-in cooling system.
- Polished steel roller Ø 500 mm.
- Working widths: 2000, 2600 and 3300 mm.
- Electric, radiant gas or steam heating. CE certified.

OPTIONS

- Nickel-plated roller (except steam model).
- Propane gas for radiant gas model.
- Natural gas for radiant gas model.
- Longitudinal folder (front outlet).
- Longitudinal folder (front and rear outlet).
- Standard rear outlet (model without folder).
- Antistatic ironing belts without folder.
- Antistatic ironing belts + folder bar.
- Cross folder.
- Hygienic tray to avoid contact between clothes and the floor.
- Wooden maritime packaging.






TECHNICAL DATA

FLATWORK IRONERS | ROLLER Ø 500 | PSP-50-200/260/330 TP2

		UNIT	PSP-50-200 TP2	PSP-50-260 TP2	PSP-50-330 TP2			
GENERAL DETAILS								
Theoretical production (electric heating)*		Kg/h	48	59	81			
		Lb/h	105	130	177			
Theoretical production (gas atmo heating)*		Kg/h	48	59	81			
		Lb/h	105	130	177			
Theoretical production (radiant gas heating)*		Kg/h	57	70	97			
		Lb/h	127	154	213			
Theoretical production (steam heating)*		Kg/h	48	59	81			
		Lb/h	105	130	177			
Roll Ø		mm	500	500	500			
		inch	19,69	19,69	19,69			
Working width		mm	2000	2600	3300			
		inch	78,74	102,36	129,92			
Heigh floor-feeding belts		mm	1170	1170	1170			
		inch	46,06	46,06	46,06			
Working speed		m/min	2 - 8	2 - 8	2 - 8			
		ft/min	6,5 - 26	6,5 - 26	6,5 - 26			
Electronic control			Yes	Yes	Yes			
N° Programs		N°	5	5	5			
Rear exit without folding			No	No	No			
Lenght folder - Front exit			Yes	Yes	Yes			
Lenght folder - Rear exit			No	No	No			
Hygienic tray			Opt.	Opt.	Opt.			
Large surface contact with linen			305	305	305			
POWER								
Electric	Heating power	kW	31,5	40,5	54			
	Total electric power	kW	32,39	41,64	55,14			
Gas	Heating power	kW	40	55	69			
	Total electric power	kW	0,88	1,13	1,13			
Steam	Heating power	kW	50	64	81			
	Total electric power	kW	0,88	1,13	1,13			
	Steam consupcion	Kg/h	50	67	85			
Roll motor power		kW	0,41	0,41	0,41			
Fan motor power		kW	0,25	0,25 x 2	0,25 x 2			
CONNECTIONS			ELECTRIC	STEAM/ GAS	ELECTRIC	STEAM/ GAS	ELECTRIC	STEAM/ GAS
Tension 230V - I + N + T		n° x mm²/A	N/A	3 x 2,5 / 10A	N/A	3 x 2,5 / 10A	N/A	3 x 2,5 / 10A
		n° x AWG/A	N/A	3 x 13 / 10A	N/A	3 x 13 / 10A	N/A	3 x 13 / 10A
Tension 230V - III + T		n° x mm²/A	4 x 25 /100A	4 x 2,5 / 10A	4 x 25 /125A	4 x 2,5 / 10A	4 x 35 /160A	4 x 2,5 / 10A
		n° x AWG/A	4 x 3 / 100A	4 x 13 / 10A	4 x 3 / 125A	4 x 13 / 10A	4 x 2 / 160A	4 x 13 / 10A
Tension 400V - III + N + T		n° x mm²/A	5 x 16 / 63A	5 x 2,5 / 10A	5 x 16 / 80A	5 x 2,5 / 10A	5 x 25 /100A	5 x 2,5 / 10A
		n° x AWG/A	5 x 5 / 63A	5 x 13 / 10A	5 x 5 / 80A	5 x 13 / 10A	5 x 3 / 100A	5 x 13 / 10A
Ø Gas inlet		BSP	1"		1"		1"	
Ø Steam inlet		BSP	3/4"		3/4"		3/4"	
Ø Condensed (Steam models)		BSP	1/2"		1/2"		1/2"	
DIMENSIONS / DIMENSIONS WITH PACKAGING								
Net width / Gross width		mm	3110 / 3290		3710 / 3890		4410 / 4590	
		inch	122,4 / 129,5		146,1 / 153,1		173,6 / 180,7	
Net depth / Gross depth		mm	1175 / 1360		1175 / 1360		1175 / 1360	
		inch	46,3 / 53,5		46,3 / 53,5		46,3 / 53,5	
Net height / Gross height		mm	1780 / 1940		1780 / 1940		1780 / 1940	
		inch	70,1 / 76,4		70,1 / 76,4		70,1 / 76,4	
Net weight / Gross weight		Kg	1190 / 1475		1475 / 1555		1760 / 1860	
		Lb	2734 / 3384		3384 / 3428		4057 / 4101	
Volume		m3	6,50 / 8,68		7,76 / 10,26		9,22 / 12,11	
		f3	230 / 307		274 / 362		326 / 428	

*45 % moisture

OTHERS				
No. Fume outlet	N°	1	2	2
Ø Fume outlet	mm	153	153	153
	inch	6,0	6,0	6,0
Air flow	m3/h	600	1200	1200
	cfm	353	706	706
Noise Level	dB	65	65	65
	l/h	26	32	43
Evaporation powe	USgallon/h	6,8	8,3	11,5
Additional ELECTRIC POWER for opt. STD rear exit	kW	0,13	0,13	0,13
Additional ELECTRIC POWER for opt. folder front exit option	kW	0,23	0,23	0,23
Additional ELECTRIC POWER for folder rear exit option	kW	0,1	0,1	0,1
Additional ELECTRIC POWER for folder front + rear exit option	kW	0,33	0,33	0,33

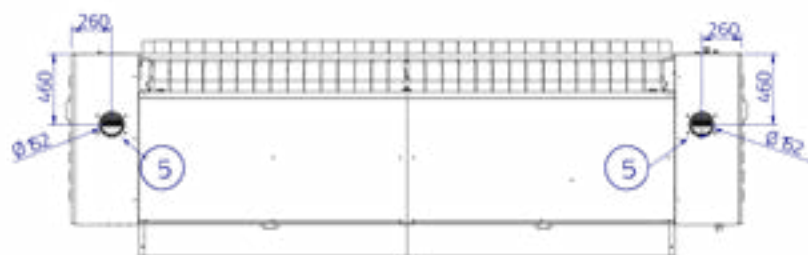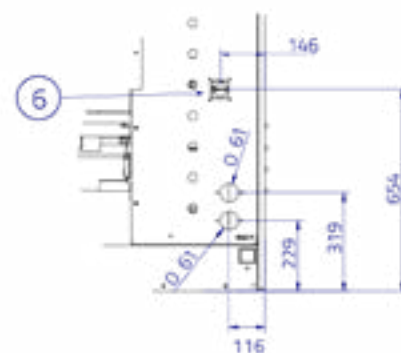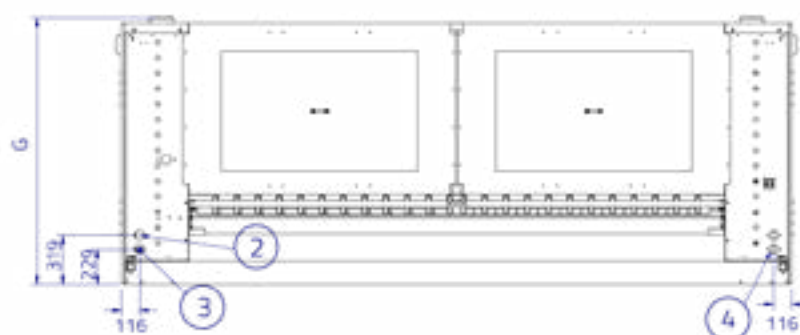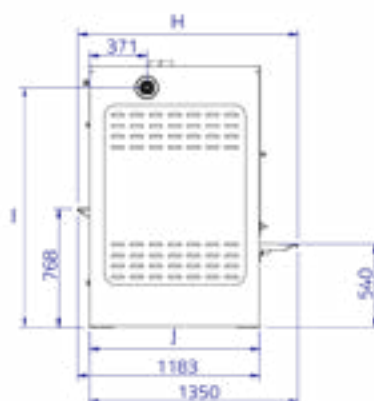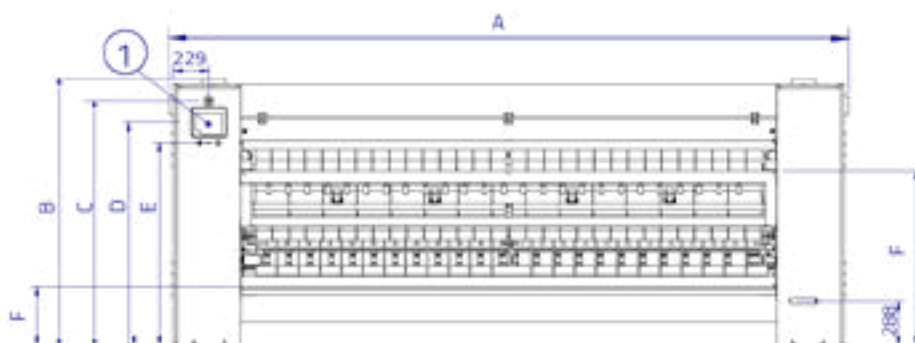

- 01. Control panel
- 02. Steam outlet $\phi 1/2"$.
- 03. Gas inlet $\phi 22$ or steam inlet $\phi 3/4"$
- 04. Power supply
- 05. $\phi 152$ steam extraction
- 06. Disconnecter

	A	B	C	D	E	F	G	H	I	J
PSP-50-200 TP2	3110	1729	1584	1445	1313	1130	1729	1428	1553	1101
PSP-50-260 TP2	3710	1729	1584	1445	1313	1130	1729	1428	1553	1101
PSP-50-330 TP2	4410	1729	1584	1445	1313	1130	1729	1428	1553	1101


This machine must be installed on a perfectly level floor.

This machine can be placed against a wall, but for ease of maintenance, it is best to leave a 1500mm space.



IRONING AND FOLDING

FLATWORK IRONERS ROLLER Ø 500 PSP-50-200/260/330 TP2

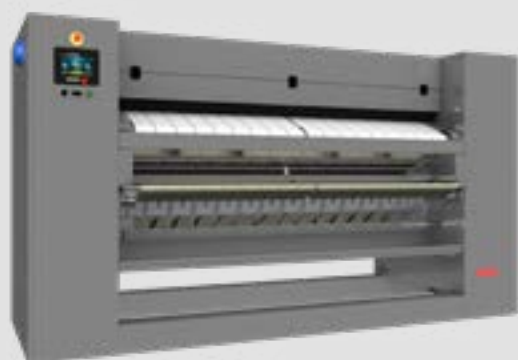

FOLDER FE RE

CHARACTERISTICS

TP2

- TP2 microprocessor, 7" touch screen, easy to use and fully programmable.
- Free online platform for programming, telemetry, data analysis... thanks to IoT. USB connection.
- 37 languages 5 preset programs.

EFFICIENCY

- Good heat conduction thanks to the material and thickness of the roll: greater control of energy consumption.
- Automatic switch-off at 80°C (adjustable parameter).
- Smoke circulation circuit at the bottom to reduce energy consumption.
- Model with radiant burner: 25% more productive.
- Automatic regulation of the ironing speed according to the residual humidity as standard.
- High production system, speed ironing up to 15m/min as standard (not compatible with folder).

VERSATILITY

- Radiant gas model: flexible, suitable for high altitude installations.
- Optional built-in longitudinal folder with or without rear exit option.

ROBUSTNESS

- Inverter roller.
- Nomex quality ironing belts: resistant to high temperatures.
- Grey skinplate panels.
- Nickel-plated roller as an option: anti-corrosive, more durable.
- Reinforced mechanical structure.

ERGONOMICS

- Acoustic comfort : <65 dB
- Suitable working height: 1170 mm feed belts.
- Compact design to save space.

MAINTENANCE

- Easy access to all components on both sides of the machine.
- Connections : electrical connection and air extraction.
- Complete technical menu: statistics, self-test, data retrieval for technician and maintenance.
- Remote communication: faster intervention.

OTHERS

- Dries and irons flat linen from a high spin washer in a single operation.
- Front feed and return.
- Built-in cooling system.
- Polished steel roller Ø 500 mm.
- Working widths: 2000, 2600 and 3300 mm.
- Electric, radiant gas or steam heating. CE certified.

OPTIONS

- Nickel-plated roller (except steam model).
- Propane gas for radiant gas model.
- Natural gas for radiant gas model.
- Longitudinal folder (front outlet).
- Longitudinal folder (front and rear outlet).
- Standard rear outlet (model without folder).
- Antistatic ironing belts without folder.
- Antistatic ironing belts + folder bar.
- Cross folder.
- Hygienic tray to avoid contact between clothes and the floor.
- Wooden maritime packaging.






TECHNICAL DATA

FLATWORK IRONERS | ROLLER Ø 500 | PSP-50-200/260/330 TP2

		UNIT	PSP-50-200 TP2	PSP-50-260 TP2	PSP-50-330 TP2			
GENERAL DETAILS								
Theoretical production (electric heating)*		Kg/h	44	55	75			
		Lb/h	97	120	165			
Theoretical production (gas atmo heating)*		Kg/h	44	55	75			
		Lb/h	97	120	165			
Theoretical production (radiant gas heating)*		Kg/h	53	65	90			
		Lb/h	118	143	198			
Theoretical production (steam heating)*		Kg/h	44	55	75			
		Lb/h	97	120	165			
Roll Ø		mm	500	500	500			
		inch	19,69	19,69	19,69			
Working width		mm	2000	2600	3300			
		inch	78,74	102,36	129,92			
Heigh floor-feeding belts		mm	1170	1170	1170			
		inch	46,06	46,06	46,06			
Working speed		m/min	2 - 8	2 - 8	2 - 8			
		ft/min	6,5 - 26	6,5 - 26	6,5 - 26			
Electronic control			Yes	Yes	Yes			
N° Programs		N°	5	5	5			
Rear exit without folding			No	No	No			
Lenght folder - Front exit			Yes	Yes	Yes			
Lenght folder - Rear exit			Yes	Yes	Yes			
Hygienic tray			Opt.	Opt.	Opt.			
Large surface contact with linen			305	305	305			
POWER								
Electric	Heating power	kW	31,5	40,5	54			
	Total electric power	kW	32,49	41,74	55,24			
Gas	Heating power	kW	40	55	69			
	Total electric power	kW	1,01	1,26	1,26			
Steam	Heating power	kW	50	64	81			
	Total electric power	kW	1,01	1,26	1,26			
	Steam consupcion	Kg/h	50	67	85			
Roll motor power		kW	0,41	0,41	0,41			
Fan motor power		kW	0,25	0,25 x 2	0,25 x 2			
CONNECTIONS			ELECTRIC	STEAM/ GAS	ELECTRIC	STEAM/ GAS	ELECTRIC	STEAM/ GAS
Tension 230V - I + N + T	n° x mm²/A	N/A	3 x 2,5 / 10A	N/A	3 x 2,5 / 10A	N/A	3 x 2,5 / 10A	N/A
	n° x AWG/A	N/A	3 x 13 / 10A	N/A	3 x 13 / 10A	N/A	3 x 13 / 10A	N/A
Tension 230V - III + T	n° x mm²/A	4 x 25 / 100A	4 x 2,5 / 10A	4 x 25 / 125A	4 x 2,5 / 10A	4 x 35 / 160A	4 x 2,5 / 10A	
	n° x AWG/A	4 x 3 / 100A	4 x 13 / 10A	4 x 3 / 125A	4 x 13 / 10A	4 x 2 / 160A	4 x 13 / 10A	
Tension 400V - III + N + T	n° x mm²/A	5 x 16 / 63A	5 x 2,5 / 10A	5 x 16 / 80A	5 x 2,5 / 10A	5 x 25 / 100A	5 x 2,5 / 10A	
	n° x AWG/A	5 x 5 / 63A	5 x 13 / 10A	5 x 5 / 80A	5 x 13 / 10A	5 x 3 / 100A	5 x 13 / 10A	
Ø Gas inlet		BSP	1"	1"	1"	1"	1"	
Ø Steam inlet		BSP	3/4"	3/4"	3/4"	3/4"	3/4"	
Ø Condensed (Steam models)		BSP	1/2"	1/2"	1/2"	1/2"	1/2"	
DIMENSIONS / DIMENSIONS WITH PACKAGING								
Net width / Gross width		mm	3110 / 3290	3710 / 3890	4410 / 4590			
		inch	122,4 / 129,5	146,1 / 153,1	173,6 / 180,7			
Net depth / Gross depth		mm	1175 (1480) / 1360	1175 (1480) / 1360	1175 (1480) / 1360			
		inch	46,3 (55,2) / 53,5	46,3 (55,2) / 53,5	46,3 (55,2) / 53,5			
Net height / Gross height		mm	1780 / 1940	1780 / 1940	1780 / 1940			
		inch	70,1 / 76,4	70,1 / 76,4	70,1 / 76,4			
Net weight / Gross weight		Kg	1240 / 1300	1535 / 1615	1840 / 1940			
		Lb	2734 / 3866	3384 / 3560	4057 / 4277			
Volume		m3	6,50 (7,99) / 8,68	7,76 (9.53) / 10,26	9,22 (11,32) / 12,11			
		f3	230 (282) / 307	274 (336) / 362	326 (400) / 428			

*45 % moisture

OTHERS				
No. Fume outlet	N°	1	2	2
Ø Fume outlet	mm	153	153	153
	inch	6,0	6,0	6,0
Air flow	m3/h	600	1200	1200
	cfm	353	706	706
Noise Level	dB	65	65	65
Evaporation powe	l/h	24	29	40
	USgallon/h	6,3	7,7	10,7
Additional ELECTRIC POWER for opt. STD rear exit	kW	0,13	0,13	0,13
Additional ELECTRIC POWER for opt. folder front exit option	kW	0,23	0,23	0,23
Additional ELECTRIC POWER for folder rear exit option	kW	0,1	0,1	0,1
Additional ELECTRIC POWER for folder front + rear exit option	kW	0,33	0,33	0,33

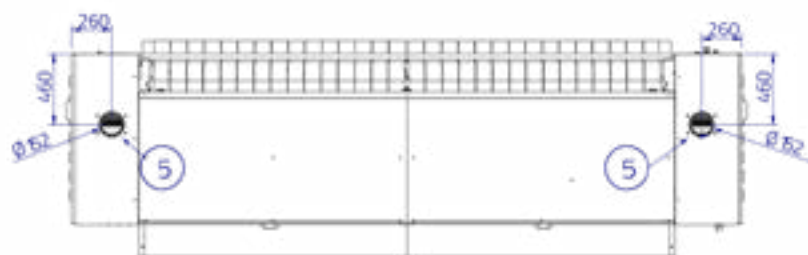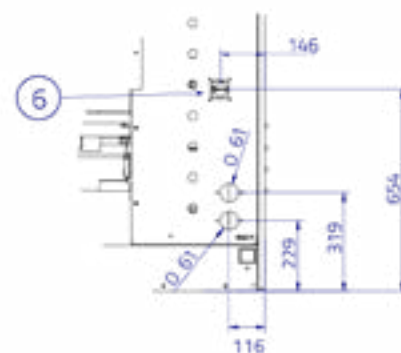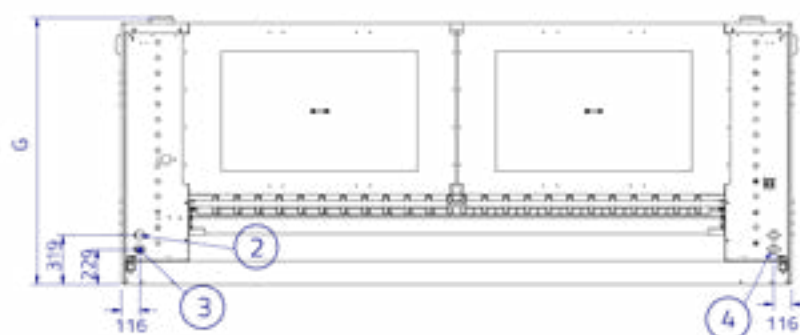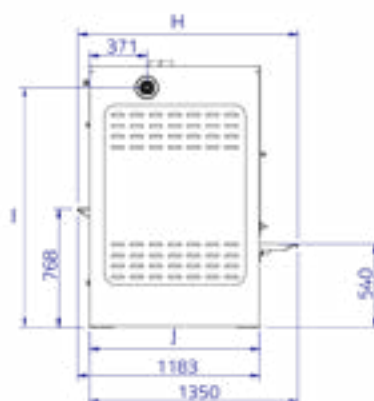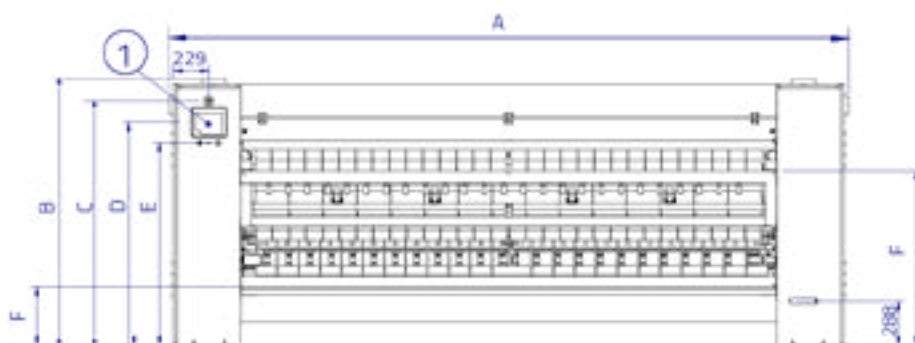

- 01. Control panel
- 02. Steam outlet $\phi 1/2"$
- 03. Gas inlet $\phi 22$ or steam inlet $\phi 3/4"$
- 04. Power supply
- 05. $\phi 152$ steam extraction
- 06. Disconnecter

	A	B	C	D	E	F	G	H	I	J
PSP-50-200 TP2	3110	1729	1584	1445	1313	1130	1729	1428	1553	1101
PSP-50-260 TP2	3710	1729	1584	1445	1313	1130	1729	1428	1553	1101
PSP-50-330 TP2	4410	1729	1584	1445	1313	1130	1729	1428	1553	1101

This machine must be installed on a perfectly level floor.

This machine can be placed against a wall, but for ease of maintenance, it is best to leave a 1500mm space.



IRONING AND FOLDING

FLATWORK IRONERS ROLLER Ø 650 PSP-65-200/260/330 TP2

CHARACTERISTICS

TP2

- TP2 microprocessor, 7" touch screen, easy to use and fully programmable.
- Free online platform for programming, telemetry, data analysis... thanks to IoT. USB connection.
- 37 languages 5 preset programs.

EFFICIENCY

- Good heat conduction thanks to the material and thickness of the roll: greater control of energy consumption.
- Automatic switch-off at 80°C (adjustable parameter).
- Smoke circulation circuit at the bottom to reduce energy consumption.
- Model with radiant burner: 25% more productive.
- Automatic regulation of the ironing speed according to the residual humidity as standard.
- High production system, speed ironing up to 15m/min as standard (not compatible with folder).

VERSATILITY

- Radiant gas model: flexible, suitable for high altitude installations.
- Optional built-in longitudinal folder with or without rear exit option.

ROBUSTNESS

- Inverter roller.
- Nomex quality ironing belts: resistant to high temperatures.
- Grey skinplate panels.
- Nickel-plated roller as an option: anti-corrosive, more durable.
- Reinforced mechanical structure.

ERGONOMICS

- Acoustic comfort : <65 dB
- Suitable working height: 1170 mm feed belts.
- Compact design to save space.

MAINTENANCE

- Easy access to all components on both sides of the machine.
- Connections : electrical connection and air extraction.
- Complete technical menu: statistics, self-test, data retrieval for technician and maintenance.
- Remote communication: faster intervention.

OTHERS

- Dries and irons flat linen from a high spin washer in a single operation.
- Front feed and return.
- Built-in cooling system.
- Polished steel roller Ø 650 mm.
- Working widths: 2000, 2600 and 3300 mm.
- Electric, radiant gas or steam heating. CE certified.

OPTIONS

- Nickel-plated roller (except steam model).
- Propane gas for radiant gas model.
- Natural gas for radiant gas model.
- Longitudinal folder (front outlet).
- Longitudinal folder (front and rear outlet).
- Standard rear outlet (model without folder).
- Antistatic ironing belts without folder.
- Antistatic ironing belts + folder bar.
- Cross folder.
- Hygienic tray to avoid contact between clothes and the floor.
- Wooden maritime packaging.







TECHNICAL DATA

FLATWORK IRONERS | ROLLER Ø 650 | PSP-65-200/260/330 TP2

		UNIT	PSP-65-200 TP2	PSP-65-260 TP2	PSP-65-330 TP2			
GENERAL DETAILS								
Theoretical production (electric heating)*		Kg/h	90	115	160			
		Lb/h	198	254	353			
Theoretical production (gas atmo heating)*		Kg/h	-	-	-			
		Lb/h	N/A	N/A	N/A			
Theoretical production (radiant gas heating)*		Kg/h	104	132	184			
		Lb/h	229	291	406			
Theoretical production (steam heating)*		Kg/h	78	115	132			
		Lb/h	172	254	291			
Roll Ø		mm	650	650	650			
		inch	25,59	25,59	25,59			
Working width		mm	2000	2600	3300			
		inch	78,74	102,36	129,92			
Heigh floor-feeding belts		mm	1170	1170	1170			
		inch	46,06	46,06	46,06			
Working speed		m/min	0,5-15	0,5-15	0,5-15			
		ft/min	1.6-49	1.6-49	1.6-49			
Electronic control			Yes	Yes	Yes			
N° Programs		N°	5	5	5			
Rear exit without folding			Opt.	Opt.	Opt.			
Lenght folder - Front exit			Opt.	Opt.	Opt.			
Lenght folder - Rear exit			Opt.	Opt.	Opt.			
Hygienic tray			Opt.	Opt.	Opt.			
Large surface contact with linen			305	305	305			
POWER								
Electric	Heating power	kW	42	54	72			
	Total electric power	kW	43,05	55,05	73,05			
Gas	Heating power	kW	52	69	78			
	Total electric power	kW	1,05	1,05	1,05			
Steam	Heating power	kW	60	76	97			
	Total electric power	kW	1,05	1,05	1,05			
	Steam consupcion	Kg/h	60	80	102			
Roll motor power		kW	0,55	0,55	0,55			
Fan motor power		kW	0,25 x 2	0,25 x 2	0,25 x 2			
CONNECTIONS			ELECTRIC	STEAM/ GAS	ELECTRIC	STEAM/ GAS	ELECTRIC	STEAM/ GAS
Tension 230V - I + N + T		n° x mm²/A	N/A	3 x 2,5 / 10A	N/A	3 x 2,5 / 10A	N/A	3 x 2,5 / 10A
		n° x AWG/A	N/A	3 x 13 / 10A	N/A	3 x 13 / 10A	N/A	3 x 13 / 10A
Tension 230V - III + T		n° x mm²/A	4 x 25 /125A	4 x 2,5 / 10A	4 x 35 /160A	4 x 2,5 / 10A	N/A	4 x 2,5 / 10A
		n° x AWG/A	4 x 3 / 125A	4 x 13 / 10A	4 x 2 / 160A	4 x 13 / 10A	N/A	4 x 13 / 10A
Tension 400V - III + N + T		n° x mm²/A	5 x 16 / 80A	5 x 2,5 / 10A	5 x 25 /100A	5 x 2,5 / 10A	5 x 25 /125A	5 x 2,5 / 10A
		n° x AWG/A	5 x 5 / 80A	5 x 13 / 10A	5 x 3 /100A	5 x 13 / 10A	5 x 3 / 125A	5 x 13 / 10A
Ø Gas inlet		BSP	1/2"		1/2"		1/2"	
Ø Steam inlet		BSP	3/4"		3/4"		3/4"	
Ø Condensed (Steam models)		BSP	1/2"		1/2"		1/2"	
DIMENSIONS / DIMENSIONS WITH PACKAGING								
Net width / Gross width		mm	3110 / 3290		3710 / 3890		4410 / 4590	
		inch	122,4 / 129,5		146,1 / 153,1		173,6 / 180,7	
Net depth / Gross depth		mm	1175 / 1360		1175 / 1360		1175 / 1360	
		inch	46,3 / 53,5		46,3 / 53,5		46,3 / 53,5	
Net height / Gross height		mm	1780 / 1940		1780 / 1940		1780 / 1940	
		inch	70,1 / 76,4		70,1 / 76,4		70,1 / 76,4	
Net weight / Gross weight		Kg	1389 / 1449		1717 / 1797		1965 / 2065	
		Lb	3062 / 3194		3785 / 3962		4332 / 4553	
Volume		m3	6,50 / 8,68		7,76 / 10,26		9,22 / 12,11	
		f3	230 / 307		274 / 362		326 / 428	

*45 % moisture

OTHERS				
No. Fume outlet	N°	2	2	2
Ø Fume outlet	mm	153	153	153
	inch	6,0	6,0	6,0
Air flow	m3/h	1200	1200	1200
	cfm	706	706	706
Noise level	dB	65	65	65
	l/h	47	59	83
Evaporation power	USgallon/h	12,4	15,7	21,9
Additional ELECTRIC POWER for opt. STD rear exit	kW	0,13	0,13	0,13
Additional ELECTRIC POWER for opt. folder front exit option	kW	0,23	0,23	0,23
Additional ELECTRIC POWER for folder rear exit option	kW	0,1	0,1	0,1
Additional ELECTRIC POWER for folder front + rear exit option	kW	0,33	0,33	0,33

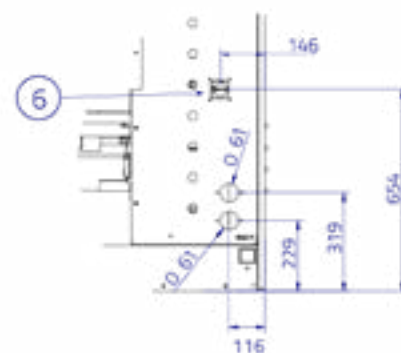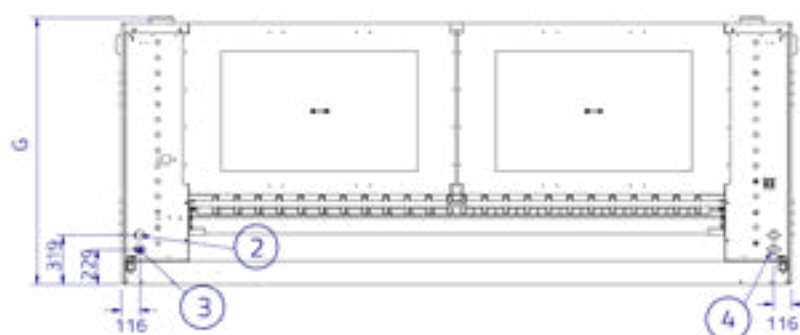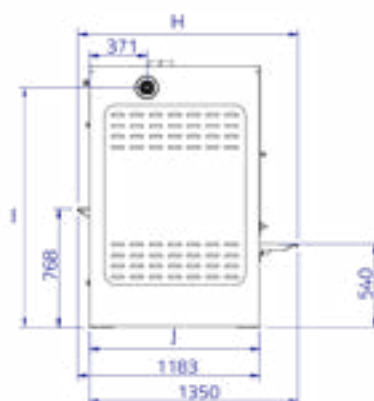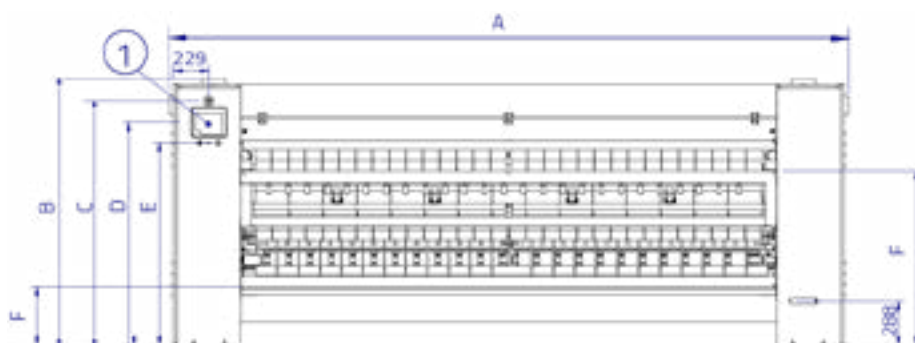

01. Control panel
02. Steam outlet $\phi 1/2"$.
03. Gas inlet $\phi 22$ or steam inlet $\phi 3/4"$ 04.
04. Power supply
05. $\phi 152$ steam extraction
06. Disconnecter

	A	B	C	D	E	F	G	H	I	J
PSP-65-200 TP2	3110	1729	1584	1445	1313	1130	1729	1428	1553	1101
PSP-65-260 TP2	3710	1729	1584	1445	1313	1130	1729	1428	1553	1101
PSP-65-330 TP2	4410	1729	1584	1445	1313	1130	1729	1428	1553	1101

This machine must be installed on a perfectly level floor.

This machine can be placed against a wall, but for ease of maintenance, it is best to leave a 1500mm space.



IRONING AND FOLDING

FLATWORK IRONERS ROLLER Ø 650 PSP-65-200/260/330 TP2



STD RE

CHARACTERISTICS

TP2

- TP2 microprocessor, 7" touch screen, easy to use and fully programmable.
- Free online platform for programming, telemetry, data analysis... thanks to IoT. USB connection.
- 37 languages 5 preset programs.

EFFICIENCY

- Good heat conduction thanks to the material and thickness of the roll: greater control of energy consumption.
- Automatic switch-off at 80°C (adjustable parameter).
- Smoke circulation circuit at the bottom to reduce energy consumption.
- Model with radiant burner: 25% more productive.
- Automatic regulation of the ironing speed according to the residual humidity as standard.
- High production system, speed ironing up to 15m/min as standard (not compatible with folder).

VERSATILITY

- Radiant gas model: flexible, suitable for high altitude installations.
- Optional built-in longitudinal folder with or without rear exit option.

ROBUSTNESS

- Inverter roller.
- Nomex quality ironing belts: resistant to high temperatures.
- Grey skinplate panels.
- Nickel-plated roller as an option: anti-corrosive, more durable.
- Reinforced mechanical structure.

ERGONOMICS

- Acoustic comfort : <65 dB
- Suitable working height: 1170 mm feed belts.
- Compact design to save space.

MAINTENANCE

- Easy access to all components on both sides of the machine.
- Connections : electrical connection and air extraction.
- Complete technical menu: statistics, self-test, data retrieval for technician and maintenance.
- Remote communication: faster intervention.

OTHERS

- Dries and irons flat linen from a high spin washer in a single operation.
- Front feed and return.
- Built-in cooling system.
- Polished steel roller Ø 650 mm.
- Working widths: 2000, 2600 and 3300 mm.
- Electric, radiant gas or steam heating. CE certified.

OPTIONS

- Nickel-plated roller (except steam model).
- Propane gas for radiant gas model.
- Natural gas for radiant gas model.
- Longitudinal folder (front outlet).
- Longitudinal folder (front and rear outlet).
- Standard rear outlet (model without folder).
- Antistatic ironing belts without folder.
- Antistatic ironing belts + folder bar.
- Cross folder.
- Hygienic tray to avoid contact between clothes and the floor.
- Wooden maritime packaging.





TECHNICAL DATA

FLATWORK IRONERS | ROLLER Ø 650 | PSP-65-200/260/330 TP2

		UNIT	PSP-65-200 TP2	PSP-65-260 TP2	PSP-65-330 TP2			
GENERAL DETAILS								
Theoretical production (electric heating)*		Kg/h	90	115	160			
		Lb/h	198	254	353			
Theoretical production (gas atmo heating)*		Kg/h	-	-	-			
		Lb/h	N/A	N/A	N/A			
Theoretical production (radiant gas heating)*		Kg/h	104	132	184			
		Lb/h	229	291	406			
Theoretical production (steam heating)*		Kg/h	78	115	132			
		Lb/h	172	254	291			
Roll Ø		mm	650	650	650			
		inch	25,59	25,59	25,59			
Working width		mm	2000	2600	3300			
		inch	78,74	102,36	129,92			
Heigh floor-feeding belts		mm	1170	1170	1170			
		inch	46,06	46,06	46,06			
Working speed		m/min	0,5-15	0,5-15	0,5-15			
		ft/min	1.6-49	1.6-49	1.6-49			
Electronic control			Yes	Yes	Yes			
N° Programs		N°	5	5	5			
Rear exit without folding			Yes	Yes	Yes			
Lenght folder - Front exit			Opt.	Opt.	Opt.			
Lenght folder - Rear exit			Opt.	Opt.	Opt.			
Hygienic tray			Opt.	Opt.	Opt.			
Large surface contact with linen			305	305	305			
POWER								
Electric	Heating power	kW	42	54	72			
	Total electric power	kW	43,18	55,18	73,18			
Gas	Heating power	kW	52	69	78			
	Total electric power	kW	1,18	1,18	1,18			
Steam	Heating power	kW	60	76	97			
	Total electric power	kW	1,18	1,18	1,18			
	Steam consupcion	Kg/h	60	80	102			
Roll motor power		kW	0,55	0,55	0,55			
Fan motor power		kW	0,25 x 2	0,25 x 2	0,25 x 2			
CONNECTIONS			ELECTRIC	STEAM/ GAS	ELECTRIC	STEAM/ GAS	ELECTRIC	STEAM/ GAS
Tension 230V - I + N + T		n° x mm²/A	N/A	3 x 2,5 / 10A	N/A	3 x 2,5 / 10A	N/A	3 x 2,5 / 10A
		n° x AWG/A	N/A	3 x 13 / 10A	N/A	3 x 13 / 10A	N/A	3 x 13 / 10A
Tension 230V - III + T		n° x mm²/A	4 x 25 /125A	4 x 2,5 / 10A	4 x 35 /160A	4 x 2,5 / 10A	N/A	4 x 2,5 / 10A
		n° x AWG/A	4 x 3 / 125A	4 x 13 / 10A	4 x 2 / 160A	4 x 13 / 10A	N/A	4 x 13 / 10A
Tension 400V - III + N + T		n° x mm²/A	5 x 16 / 80A	5 x 2,5 / 10A	5 x 25 /100A	5 x 2,5 / 10A	5 x 25 /125A	5 x 2,5 / 10A
		n° x AWG/A	5 x 5 / 80A	5 x 13 / 10A	5 x 3 /100A	5 x 13 / 10A	5 x 3 / 125A	5 x 13 / 10A
Ø Gas inlet		BSP	1/2"		1/2"		1/2"	
Ø Steam inlet		BSP	3/4"		3/4"		3/4"	
Ø Condensed (Steam models)		BSP	1/2"		1/2"		1/2"	
DIMENSIONS / DIMENSIONS WITH PACKAGING								
Net width / Gross width		mm	3110 / 3290		3710 / 3890		4410 / 4590	
		inch	122,4 / 129,5		146,1 / 153,1		173,6 / 180,7	
Net depth / Gross depth		mm	1175 / 1360		1175 / 1360		1175 / 1360	
		inch	46,3 / 53,5		46,3 / 53,5		46,3 / 53,5	
Net height / Gross height		mm	1780 / 1940		1780 / 1940		1780 / 1940	
		inch	70,1 / 76,4		70,1 / 76,4		70,1 / 76,4	
Net weight / Gross weight		Kg	1419 / 1479		1757 / 1837		2015 / 2115	
		Lb	3128 / 3261		3874 / 4050		4442 / 4663	
Volume		m3	6,50 / 8,68		7,76 / 10,26		9,22 / 12,11	
		f3	230 / 307		274 / 362		326 / 428	

*45 % moisture

OTHERS				
No. Fume outlet	N°	2	2	2
Ø Fume outlet	mm	153	153	153
	inch	6,0	6,0	6,0
Air flow	m3/h	1200	1200	1200
	cfm	706	706	706
Noise level	dB	65	65	65
	l/h	47	59	83
Evaporation power	USgallon/h	12,4	15,7	21,9
Additional ELECTRIC POWER for opt. STD rear exit	kW	0,13	0,13	0,13
Additional ELECTRIC POWER for opt. folder front exit option	kW	0,23	0,23	0,23
Additional ELECTRIC POWER for folder rear exit option	kW	0,1	0,1	0,1
Additional ELECTRIC POWER for folder front + rear exit option	kW	0,33	0,33	0,33

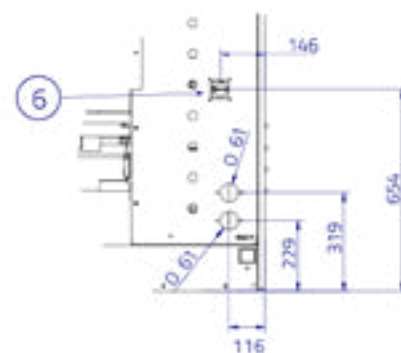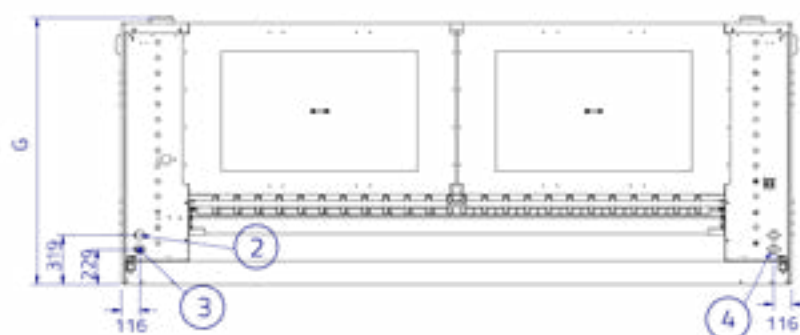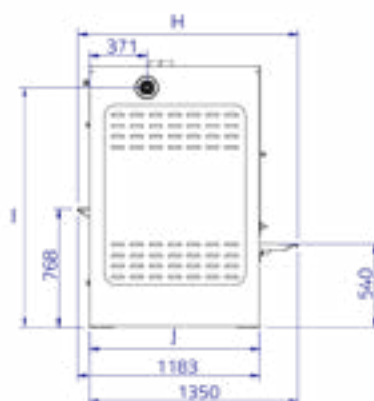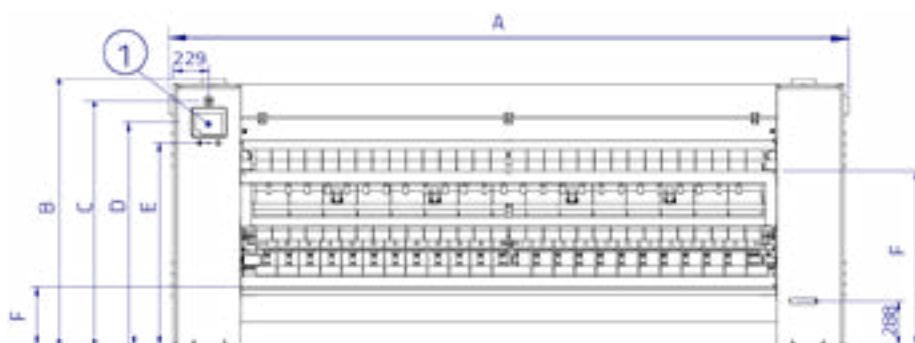

01. Control panel
02. Steam outlet $\phi 1/2"$.
03. Gas inlet $\phi 22$ or steam inlet $\phi 3/4"$ 04.
04. Power supply
05. $\phi 152$ steam extraction
06. Disconnecter

	A	B	C	D	E	F	G	H	I	J
PSP-65-200 TP2	3110	1729	1584	1445	1313	1130	1729	1428	1553	1101
PSP-65-260 TP2	3710	1729	1584	1445	1313	1130	1729	1428	1553	1101
PSP-65-330 TP2	4410	1729	1584	1445	1313	1130	1729	1428	1553	1101

This machine must be installed on a perfectly level floor.

This machine can be placed against a wall, but for ease of maintenance, it is best to leave a 1500mm space.



IRONING AND FOLDING

FLATWORK IRONERS ROLLER Ø 650 PSP-65-200/260/330 TP2



FOLDER FE

CHARACTERISTICS

TP2

- TP2 microprocessor, 7" touch screen, easy to use and fully programmable.
- Free online platform for programming, telemetry, data analysis... thanks to IoT. USB connection.
- 37 languages 5 preset programs.

EFFICIENCY

- Good heat conduction thanks to the material and thickness of the roll: greater control of energy consumption.
- Automatic switch-off at 80°C (adjustable parameter).
- Smoke circulation circuit at the bottom to reduce energy consumption.
- Model with radiant burner: 25% more productive.
- Automatic regulation of the ironing speed according to the residual humidity as standard.
- High production system, speed ironing up to 15m/min as standard (not compatible with folder).

VERSATILITY

- Radiant gas model: flexible, suitable for high altitude installations.
- Optional built-in longitudinal folder with or without rear exit option.

ROBUSTNESS

- Inverter roller.
- Nomex quality ironing belts: resistant to high temperatures.
- Grey skinplate panels.
- Nickel-plated roller as an option: anti-corrosive, more durable.
- Reinforced mechanical structure.

ERGONOMICS

- Acoustic comfort : <65 dB
- Suitable working height: 1170 mm feed belts.
- Compact design to save space.

MAINTENANCE

- Easy access to all components on both sides of the machine.
- Connections : electrical connection and air extraction.
- Complete technical menu: statistics, self-test, data retrieval for technician and maintenance.
- Remote communication: faster intervention.

OTHERS

- Dries and irons flat linen from a high spin washer in a single operation.
- Front feed and return.
- Built-in cooling system.
- Polished steel roller Ø 650 mm.
- Working widths: 2000, 2600 and 3300 mm.
- Electric, radiant gas or steam heating. CE certified.

OPTIONS

- Nickel-plated roller (except steam model).
- Propane gas for radiant gas model.
- Natural gas for radiant gas model.
- Longitudinal folder (front outlet).
- Longitudinal folder (front and rear outlet).
- Standard rear outlet (model without folder).
- Antistatic ironing belts without folder.
- Antistatic ironing belts + folder bar.
- Cross folder.
- Hygienic tray to avoid contact between clothes and the floor.
- Wooden maritime packaging.





TECHNICAL DATA

FLATWORK IRONERS | ROLLER Ø 650 | PSP-65-200/260/330 TP2

		UNIT	PSP-65-200 TP2	PSP-65-260 TP2	PSP-65-330 TP2			
GENERAL DETAILS								
Theoretical production (electric heating)*		Kg/h	63	81	112			
		Lb/h	139	177	247			
Theoretical production (gas atmo heating)*		Kg/h	-	-	-			
		Lb/h	N/A	N/A	N/A			
Theoretical production (radiant gas heating)*		Kg/h	73	92	129			
		Lb/h	160	204	284			
Theoretical production (steam heating)*		Kg/h	55	81	92			
		Lb/h	120	177	204			
Roll Ø		mm	650	650	650			
		inch	25,59	25,59	25,59			
Working width		mm	2000	2600	3300			
		inch	78,74	102,36	129,92			
Heigh floor-feeding belts		mm	1170	1170	1170			
		inch	46,06	46,06	46,06			
Working speed		m/min	2 - 10	2 - 10	2 - 10			
		ft/min	6,5 - 32	6,5 - 32	6,5 - 32			
Electronic control			Yes	Yes	Yes			
N° Programs		N°	5	5	5			
Rear exit without folding			No	No	No			
Lenght folder - Front exit			Yes	Yes	Yes			
Lenght folder - Rear exit			No	No	No			
Hygienic tray			Opt.	Opt.	Opt.			
Large surface contact with linen			305	305	305			
POWER								
Electric	Heating power	kW	42	54	72			
	Total electric power	kW	43,28	55,28	73,28			
Gas	Heating power	kW	52	69	78			
	Total electric power	kW	1,31	1,31	1,31			
Steam	Heating power	kW	60	76	97			
	Total electric power	kW	1,31	1,31	1,31			
	Steam consupcion	Kg/h	60	80	102			
Roll motor power		kW	0,55	0,55	0,55			
Fan motor power		kW	0,25 x 2	0,25 x 2	0,25 x 2			
CONNECTIONS			ELECTRIC	STEAM/ GAS	ELECTRIC	STEAM/ GAS	ELECTRIC	STEAM/ GAS
Tension 230V - I + N + T		n° x mm²/A	N/A	3 x 2,5 / 10A	N/A	3 x 2,5 / 10A	N/A	3 x 2,5 / 10A
		n° x AWG/A	N/A	3 x 13 / 10A	N/A	3 x 13 / 10A	N/A	3 x 13 / 10A
Tension 230V - III + T		n° x mm²/A	4 x 25 /125A	4 x 2,5 / 10A	4 x 35 /160A	4 x 2,5 / 10A	N/A	4 x 2,5 / 10A
		n° x AWG/A	4 x 3 / 125A	4 x 13 / 10A	4 x 2 / 160A	4 x 13 / 10A	N/A	4 x 13 / 10A
Tension 400V - III + N + T		n° x mm²/A	5 x 16 / 80A	5 x 2,5 / 10A	5 x 25 /100A	5 x 2,5 / 10A	5 x 25 /125A	5 x 2,5 / 10A
		n° x AWG/A	5 x 5 / 80A	5 x 13 / 10A	5 x 3 /100A	5 x 13 / 10A	5 x 3 / 125A	5 x 13 / 10A
Ø Gas inlet		BSP	1/2"		1/2"		1/2"	
Ø Steam inlet		BSP	3/4"		3/4"		3/4"	
Ø Condensed (Steam models)		BSP	1/2"		1/2"		1/2"	
DIMENSIONS / DIMENSIONS WITH PACKAGING								
Net width / Gross width		mm	3110 / 3290		3710 / 3890		4410 / 4590	
		inch	122,4 / 129,5		146,1 / 153,1		173,6 / 180,7	
Net depth / Gross depth		mm	1175 / 1360		1175 / 1360		1175 / 1360	
		inch	46,3 / 53,5		46,3 / 53,5		46,3 / 53,5	
Net height / Gross height		mm	1780 / 1940		1780 / 1940		1780 / 1940	
		inch	70,1 / 76,4		70,1 / 76,4		70,1 / 76,4	
Net weight / Gross weight		Kg	1697 / 1757		1812 / 1892		2095 / 2195	
		Lb	3305 / 3874		4127 / 4171		4795 / 4839	
Volume		m3	6,50 / 8,68		7,76 / 10,26		9,22 / 12,11	
		f3	230 / 307		274 / 362		326 / 428	

*45 % moisture

OTHERS				
No. Fume outlet	N°	2	2	2
Ø Fume outlet	mm	153	153	153
	inch	6,0	6,0	6,0
Air flow	m3/h	1200	1200	1200
	cfm	706	706	706
Noise level	dB	65	65	65
	l/h	33	42	58
Evaporation power	USgallon/h	8,7	11	15,3
Additional ELECTRIC POWER for opt. STD rear exit	kW	0,13	0,13	0,13
Additional ELECTRIC POWER for opt. folder front exit option	kW	0,23	0,23	0,23
Additional ELECTRIC POWER for folder rear exit option	kW	0,1	0,1	0,1
Additional ELECTRIC POWER for folder front + rear exit option	kW	0,33	0,33	0,33

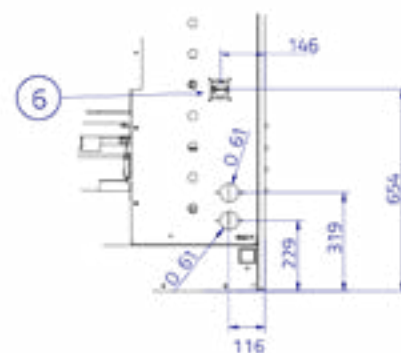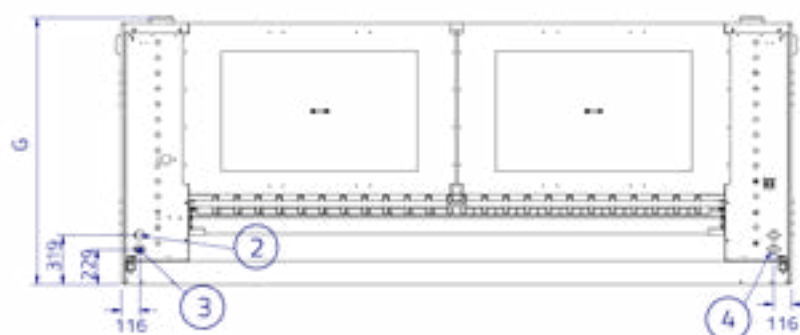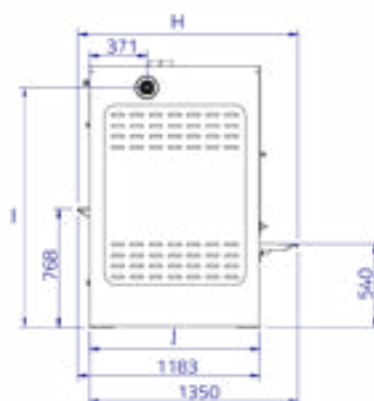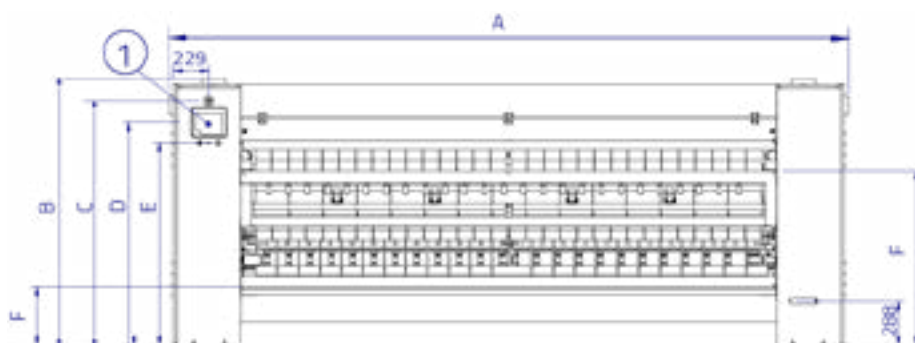

01. Control panel
02. Steam outlet $\phi 1/2"$
03. Gas inlet $\phi 22$ or steam inlet $\phi 3/4"$ 04.
04. Power supply
05. $\phi 152$ steam extraction
06. Disconnecter

	A	B	C	D	E	F	G	H	I	J
PSP-65-200 TP2	3110	1729	1584	1445	1313	1130	1729	1428	1553	1101
PSP-65-260 TP2	3710	1729	1584	1445	1313	1130	1729	1428	1553	1101
PSP-65-330 TP2	4410	1729	1584	1445	1313	1130	1729	1428	1553	1101

This machine must be installed on a perfectly level floor.

This machine can be placed against a wall, but for ease of maintenance, it is best to leave a 1500mm space.



IRONING AND FOLDING

FLATWORK IRONERS ROLLER Ø 650 PSP-65-200/260/330 TP2



FOLDER FE RE

CHARACTERISTICS

TP2

- TP2 microprocessor, 7" touch screen, easy to use and fully programmable.
- Free online platform for programming, telemetry, data analysis... thanks to IoT. USB connection.
- 37 languages 5 preset programs.

EFFICIENCY

- Good heat conduction thanks to the material and thickness of the roll: greater control of energy consumption.
- Automatic switch-off at 80°C (adjustable parameter).
- Smoke circulation circuit at the bottom to reduce energy consumption.
- Model with radiant burner: 25% more productive.
- Automatic regulation of the ironing speed according to the residual humidity as standard.
- High production system, speed ironing up to 15m/min as standard (not compatible with folder).

VERSATILITY

- Radiant gas model: flexible, suitable for high altitude installations.
- Optional built-in longitudinal folder with or without rear exit option.

ROBUSTNESS

- Inverter roller.
- Nomex quality ironing belts: resistant to high temperatures.
- Grey skinplate panels.
- Nickel-plated roller as an option: anti-corrosive, more durable.
- Reinforced mechanical structure.

ERGONOMICS

- Acoustic comfort : <65 dB
- Suitable working height: 1170 mm feed belts.
- Compact design to save space.

MAINTENANCE

- Easy access to all components on both sides of the machine.
- Connections : electrical connection and air extraction.
- Complete technical menu: statistics, self-test, data retrieval for technician and maintenance.
- Remote communication: faster intervention.

OTHERS

- Dries and irons flat linen from a high spin washer in a single operation.
- Front feed and return.
- Built-in cooling system.
- Polished steel roller Ø 650 mm.
- Working widths: 2000, 2600 and 3300 mm.
- Electric, radiant gas or steam heating. CE certified.

OPTIONS

- Nickel-plated roller (except steam model).
- Propane gas for radiant gas model.
- Natural gas for radiant gas model.
- Longitudinal folder (front outlet).
- Longitudinal folder (front and rear outlet).
- Standard rear outlet (model without folder).
- Antistatic ironing belts without folder.
- Antistatic ironing belts + folder bar.
- Cross folder.
- Hygienic tray to avoid contact between clothes and the floor.
- Wooden maritime packaging.






TECHNICAL DATA

FLATWORK IRONERS | ROLLER Ø 650 | PSP-65-200/260/330 TP2

		UNIT	PSP-65-200 TP2	PSP-65-260 TP2	PSP-65-330 TP2			
GENERAL DETAILS								
Theoretical production (electric heating)*		Kg/h	59	75	104			
		Lb/h	129	165	229			
Theoretical production (gas atmo heating)*		Kg/h	-	-	-			
		Lb/h	N/A	N/A	N/A			
Theoretical production (radiant gas heating)*		Kg/h	68	86	120			
		Lb/h	149	189	264			
Theoretical production (steam heating)*		Kg/h	51	75	86			
		Lb/h	112	165	189			
Roll Ø		mm	650	650	650			
		inch	25,59	25,59	25,59			
Working width		mm	2000	2600	3300			
		inch	78,74	102,36	129,92			
Heigh floor-feeding belts		mm	1170	1170	1170			
		inch	46,06	46,06	46,06			
Working speed		m/min	2 - 10	2 - 10	2 - 10			
		ft/min	6,5 - 32	6,5 - 32	6,5 - 32			
Electronic control			Yes	Yes	Yes			
N° Programs		N°	5	5	5			
Rear exit without folding			No	No	No			
Lenght folder - Front exit			Yes	Yes	Yes			
Lenght folder - Rear exit			Yes	Yes	Yes			
Hygienic tray			Opt.	Opt.	Opt.			
Large surface contact with linen			305	305	305			
POWER								
Electric	Heating power	kW	42	54	72			
	Total electric power	kW	43,38	55,38	73,38			
Gas	Heating power	kW	52	69	78			
	Total electric power	kW	1,44	1,44	1,44			
Steam	Heating power	kW	60	76	97			
	Total electric power	kW	1,44	1,44	1,44			
	Steam consupcion	Kg/h	60	80	102			
Roll motor power		kW	0,55	0,55	0,55			
Fan motor power		kW	0,25 x 2	0,25 x 2	0,25 x 2			
CONNECTIONS			ELECTRIC	STEAM/ GAS	ELECTRIC	STEAM/ GAS	ELECTRIC	STEAM/ GAS
Tension 230V - I + N + T		n° x mm²/A	N/A	3 x 2,5 / 10A	N/A	3 x 2,5 / 10A	N/A	3 x 2,5 / 10A
		n° x AWG/A	N/A	3 x 13 / 10A	N/A	3 x 13 / 10A	N/A	3 x 13 / 10A
Tension 230V - III + T		n° x mm²/A	4 x 25 /125A	4 x 2,5 / 10A	4 x 35 /160A	4 x 2,5 / 10A	N/A	4 x 2,5 / 10A
		n° x AWG/A	4 x 3 / 125A	4 x 13 / 10A	4 x 2 / 160A	4 x 13 / 10A	N/A	4 x 13 / 10A
Tension 400V - III + N + T		n° x mm²/A	5 x 16 / 80A	5 x 2,5 / 10A	5 x 25 /100A	5 x 2,5 / 10A	5 x 25 /125A	5 x 2,5 / 10A
		n° x AWG/A	5 x 5 / 80A	5 x 13 / 10A	5 x 3 /100A	5 x 13 / 10A	5 x 3 / 125A	5 x 13 / 10A
Ø Gas inlet		BSP	1/2"		1/2"		1/2"	
Ø Steam inlet		BSP	3/4"		3/4"		3/4"	
Ø Condensed (Steam models)		BSP	1/2"		1/2"		1/2"	
DIMENSIONS / DIMENSIONS WITH PACKAGING								
Net width / Gross width		mm	3110 / 3290		3710 / 3890		4410 / 4590	
		inch	122,4 / 129,5		146,1 / 153,1		173,6 / 180,7	
Net depth / Gross depth		mm	1175 / 1360		1175 / 1360		1175 / 1360	
		inch	46,3 / 53,5		46,3 / 53,5		46,3 / 53,5	
Net height / Gross height		mm	1780 / 1940		1780 / 1940		1780 / 1940	
		inch	70,1 / 76,4		70,1 / 76,4		70,1 / 76,4	
Net weight / Gross weight		Kg	1697 / 1757		1872 / 1952		2175 / 2275	
		Lb	3305 / 3874		4127 / 4303		4795 /5016	
Volume		m3	6,50 / 8,68		7,76 / 10,26		9,22 / 12,11	
		f3	230 / 307		274 / 362		326 / 428	

*45 % moisture

OTHERS				
No. Fume outlet	N°	2	2	2
Ø Fume outlet	mm	153	153	153
	inch	6,0	6,0	6,0
Air flow	m3/h	1200	1200	1200
	cfm	706	706	706
Noise level	dB	65	65	65
	l/h	30	39	54
Evaporation power	USgallon/h	8	10,2	14,2
Additional ELECTRIC POWER for opt. STD rear exit	kW	0,13	0,13	0,13
Additional ELECTRIC POWER for opt. folder front exit option	kW	0,23	0,23	0,23
Additional ELECTRIC POWER for folder rear exit option	kW	0,1	0,1	0,1
Additional ELECTRIC POWER for folder front + rear exit option	kW	0,33	0,33	0,33

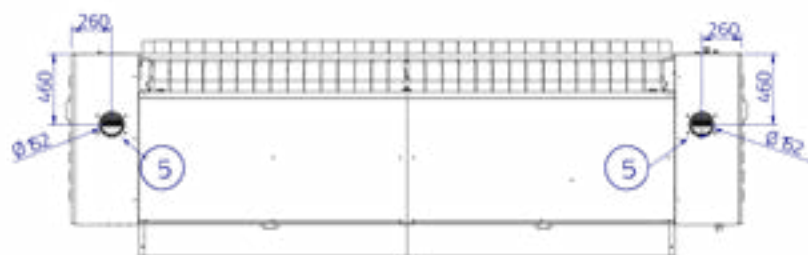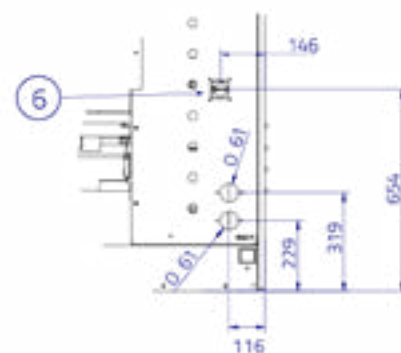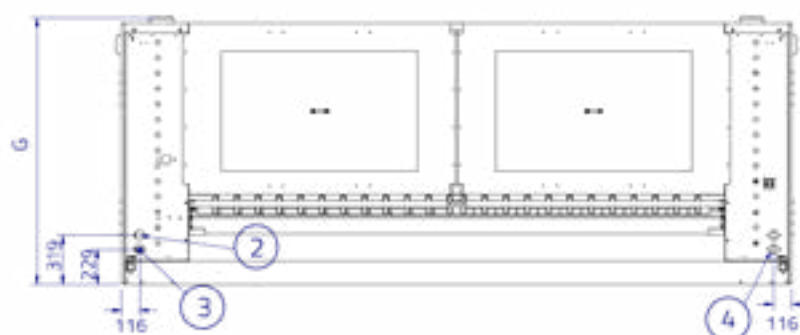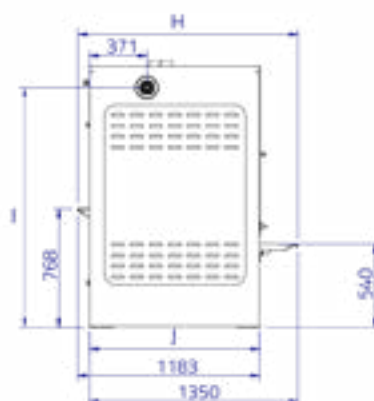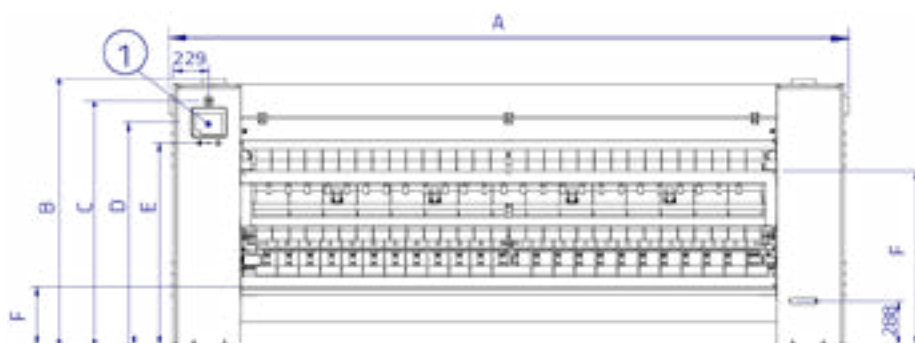

01. Control panel
02. Steam outlet $\phi 1/2"$
03. Gas inlet $\phi 22$ or steam inlet $\phi 3/4"$ 04.
04. Power supply
05. $\phi 152$ steam extraction
06. Disconnecter

	A	B	C	D	E	F	G	H	I	J
PSP-65-200 TP2	3110	1729	1584	1445	1313	1130	1729	1428	1553	1101
PSP-65-260 TP2	3710	1729	1584	1445	1313	1130	1729	1428	1553	1101
PSP-65-330 TP2	4410	1729	1584	1445	1313	1130	1729	1428	1553	1101

This machine must be installed on a perfectly level floor.

This machine can be placed against a wall, but for ease of maintenance, it is best to leave a 1500mm space.




IRONING AND FOLDING

CROSS FOLDER AND STACKER PL CROSS-2000/2600/3300 TP2

FEATURES

Independent cross folder with stacker.

- Working width: 2000 - 2600 - 3300 mm.
- Speed 9mt/min.
- 1 crossfold working lanes.
- Crossfolds by air jet and rotating rolls.
- Contror Touch Plus TP2 panel.
- 20 variable programs with PLC.
- Selection chance of side and exit direction of stacker conveyor.
- Transportation belts in cotton.
- Safety alarm for cross-folds obstructions.
- Calculation of partial and total production.
- Totally personalized foldin parameters.
- Stacking chance from 1 to 10.

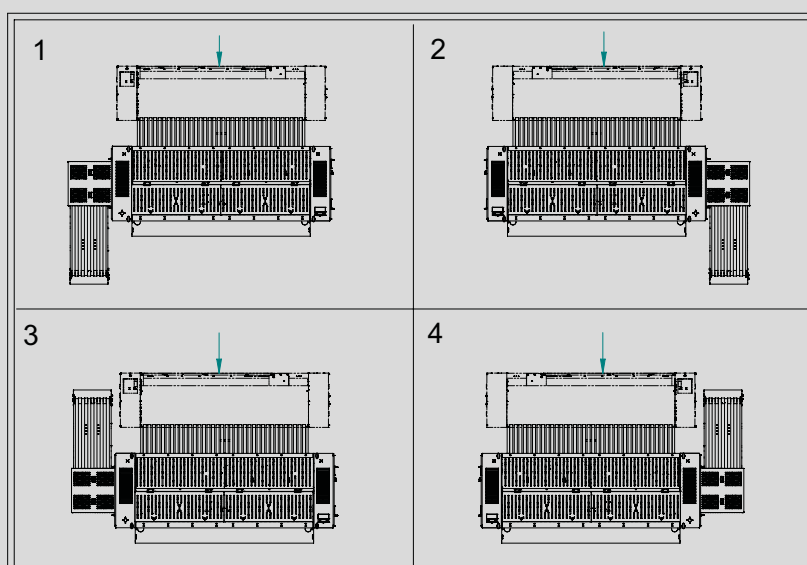

TECHNICAL DATA

CROSS FOLDER AND STACKER | PL CROSS-2000/2600/3300 TP2

DATOS TÉCNICOS	UNIT.	PL CROSS-2000	PL CROSS-2600	PL CROSS-3300
GENERAL DETAILS				
Working width	mm	710	2600	3300
Ironing speed	mt/min	9	9	9
Nº of programmes	Kg/h	20	20	20
FOLDING				
1 lane - crossfold	Nº	1-2-3	1-2-3	1-2-3
POWER				
Power	kW	1,5	1,5	1,5
Voltage 400V - III + N + T	Hz	50Hz // Amp 3,7	50Hz // Amp 3,7	50Hz // Amp 3,7
Voltage 230V-III + T	Hz	50Hz // Amp 6,3	50Hz // Amp 6,3	50Hz // Amp 6,3
FOLDER DIMENSIONS / PACKAGING DIMENSIONS				
Net width / gross width	mm	3.010 / 3.110	3.460 / 3.560	4.160 / 4.260
Net depth / gross depth	mm	1.920 / 2.020	1.920 / 2.020	1.920 / 2.020
Net height / gross depth	mm	1.240 / 1.340	1.240 / 1.340	1.240 / 1.340
Net / gross weight	Kg	1.150 / 1.200	1.400 / 1.450	1.680 / 1.730
STACKER DIMENSIONS / PACK DIMENSIONS				
Net width / gross width	mm	710 / 810	710 / 810	710 / 810
Net depth / gross depth	mm	7100 / 1800	1700 / 1800	1700 / 1800
Net height / gross depth	mm	620 / 720	620 / 720	620 / 720
Net weight / gross weight	Kg	180 / 210	180 / 210	180 / 210
OTHERS				
Compressed air needed (6,5 bar)	NI/h	3500	3500	3500

