

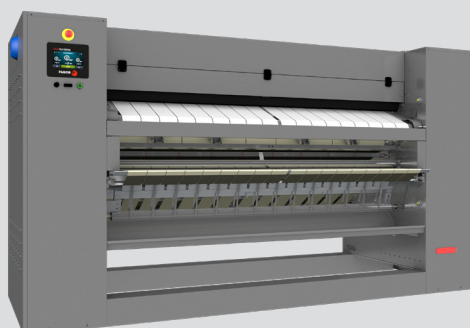


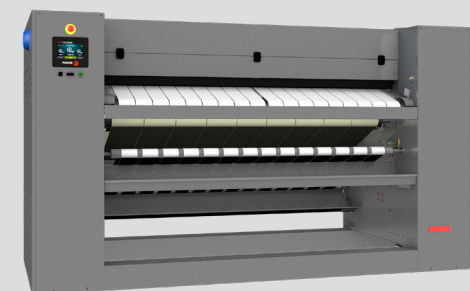

IRONING AND FOLDING

FLATWORK IRONERS ROLLER Ø 500 PSP-50-200/260/330 TP2

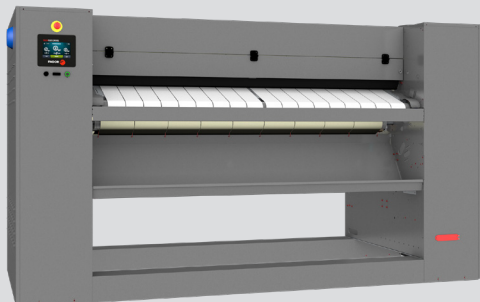

CHARACTERISTICS

TP2

- TP2 microprocessor, 7" touch screen, easy to use and fully programmable.
- USB connection. Free online platform for programming, telemetry, data analysis... thanks to IoT.
- 37 languages 5 preset programs.

EFFICIENCY

- Good heat conduction thanks to the material and thickness of the roll: greater control of energy consumption.
- Automatic switch-off at 80°C (adjustable parameter).
- Smoke circulation circuit at the bottom to reduce energy consumption.
- Model with radiant burner: 25% more productive.
- Automatic regulation of the ironing speed according to the residual humidity as standard.
- High production system, ironing up to 15m/min as standard (not compatible with folder).

VERSATILITY

- Radiant gas model: flexible, suitable for high altitude installations.
- Optional built-in longitudinal folder with or without rear exit option.

ROBUSTNESS

- Nomex quality ironing belts: resistant to high temperatures.
- Grey skinplate panels.
- Nickel-plated roller as an option: anti-corrosive, more durable.
- Reinforced mechanical structure.

ERGONOMICS

- Acoustic comfort : <65 dB
- Suitable working height: 1170 mm feed belts.
- Compact design to save space.

MAINTENANCE

- Easy access to all components on both sides of the machine.
- Connections : electrical connection and air extraction.
- Complete technical menu: statistics, self-test, data retrieval for technician and maintenance.

OTHERS

- Dries and irons flat linen from a high spin washer in a single operation.
- Front feed and return.
- Built-in cooling system.
- Polished steel roller Ø 500 mm.
- Working widths: 2000, 2600 and 3300 mm.
- Electric, radiant gas or steam heating. CE certified.

OPTIONS

- Nickel-plated roller (except steam model).
- Propane gas for radiant gas model.
- Natural gas for radiant gas model.
- Longitudinal folder (front outlet).
- Longitudinal folder (front and rear outlet).
- Standard rear outlet (model without folder).
- Antistatic ironing belts without folder.
- Antistatic ironing belts + folder bar.
- Cross folder.
- Hygienic tray to avoid contact between clothes and the floor.
- Wooden maritime packaging.


TECHNICAL DATA

FLATWORK IRONERS | ROLLER Ø 500 | PSP-50-200/260/330 TP2

		UNIT	PSP-50-200 TP2	PSP-50-260 TP2	PSP-50-330 TP2			
GENERAL DETAILS								
Theoretical output Electric, steam and atmo. gas heating* standard mod. front or rear exit		Kg/h	68	84	115			
		lb/h	150	185	254			
Theoretical output Electric, steam and atmo. gas heating* mod. Folder front exit		Kg/h	48	59	81			
		lb/h	105	130	177			
Theoretical output Electric, steam and atmo. Gas heating* mod. Folder front and rear exit		Kg/h	44	55	75			
		lb/h	97	120	165			
Theoretical production Radiant gas heating* mod stan- dard front or rear exit		Kg/h	82	100	138			
		lb/l	181	220	304			
Theoretical production Radiant gas heating* mod folder front exit		Kg/h	57	70	97			
		lb/l	127	154	213			
Theoretical production Radiant gas heating* mod folder front and rear exit		Kg/h	53	65	90			
		lb/l	118	143	198			
Roll Ø		mm	500	500	500			
		inch	19,69	19,69	19,69			
Working width		mm	2.000	2.600	3.300			
		inch	78,74	102,36	129,92			
Height floor-feeding belts		mm	1.170	1.170	1.170			
		inch	46,06	46,06	46,06			
Working speed standard mod.		m/min	0,5 - 8	0,5 - 8	0,5 - 8			
		ft/min	1,6 - 26	1,6 - 26	1,6 - 26			
Working speed mod. with folder		m/min	2 - 8	2 - 8	2 - 8			
		ft/min	6,5 - 26	6,5 - 26	6,5 - 26			
Electronic control		-	TP2	TP2	TP2			
No. Programs		-	5	5	5			
Lenght folder		-	OPC.	OPC.	OPC.			
Rear exit		-	OPC.	OPC.	OPC.			
Large surface contact with linen		-	305°	305°	305°			
POWER								
Roll motor power		Kw	0,41	0,41	0,41			
Fan motor power		Kw	0,25	0,5	0,5			
Electric	Heating power	Kw	31,5	40,5	54			
	Total electric power	Kw	32,16	41,41	54,91			
Gas	Heating power	Kw	40	55	69			
	Total electric power	Kw	0,66	0,91	0,91			
Steam	Heating power	Kw	50	64	81			
	Total electric power	Kw	0,66	0,91	0,91			
	Steam consuption	Kg/h	50	67	85			
Additional electric power standard mod. Rear exit		Kw	0,28	0,28	0,28			
Additional electric power mod with folder front exit		Kw	0,66	0,66	0,66			
Additional electric power mod with folder front and rear exit		Kw	0,76	0,76	0,6			
CONNECTIONS			ELECTRIC	STEAM/ GAS	ELECTRIC	STEAM/ GAS	ELECTRIC	STEAM/ GAS
Tension 230V - I + N + T		Nº x mm² / A	N/A	3 x 2,5 / 10A	N/A	3 x 2,5 / 10A	N/A	3 x 2,5 / 10A
		nº x AWG/A	N/A	3 x 13 / 10A	N/A	3 x 13 / 10A	N/A	3 x 13 / 10A
Tension 230V - III + T		Nº x mm² / A	4 x 25 / 100A	4 x 2,5 / 10A	4 x 25 / 125A	4 x 2,5 / 10A	4 x 35 160A	4 x 2,5 / 10A
		nº x AWG/A	4 x 3 / 100A	4 x 13 / 10A	4 x 3 / 125A	4 x 13 / 10A	4 x 2 160A	4 x 13 / 10A
Tension 400V - III + N + T		Nº x mm² / A	5 x 16 / 63A	5 x 2,5 / 10A	5 x 16 / 80A	5 x 2,5 / 10A	5 x 25 / 100A	5 x 2,5 / 10A
		nº x AWG/A	5 x 5 / 63A	5 x 13 / 10A	5 x 5 / 80A	5 x 13 / 10A	5 x 3 / 100A	5 x 13 / 10A
Ø Gas inlet		BSP	1"		1"		1"	
Ø Steam inlet		BSP	3/4"		3/4"		3/4"	
Ø Condensed (Steam models)		BSP	1/2"		1/2"		1/2"	
DIMENSIONS / DIMENSIONS WITH PACKAGING								
Net width / Gross width		mm	3110 / 3290		3710 / 3890		4410 / 4590	
		inch	122,4 / 129,5		146,1 / 153,1		173,6 / 180,7	
Net depth (with rear exit open) / gross depth		mm	1175 (1507) / 1360		1175 (1507) / 1360		1175 (1507) / 1360	
		inch	46,3 (59,3) / 53,5		46,3 (59,3) / 53,5		46,3 (59,3) / 53,5	
Net height / gross height		mm	1780 / 1940		1780 / 1940		1780 / 1940	
		inch	70,1 / 76,4		70,1 / 76,4		70,1 / 76,4	
Net weight / gross weight standard mod.		kg	1130 / 1190		1380 / 1460		1630 / 1730	
		lbs	2491 / 2624		3042 / 3219		3594 / 3814	
Net weight / gross weight standard mod. with rear exit		kg	1160 / 1220		1420 / 1500		1680 / 1780	
		lbs	2557 / 2690		3131 / 3307		3704 / 3924	

*45 % moisture

Net weight / gross weight moaad. Folder front exit	kg	1190 / 1250	1475 / 1555	1760 / 1860
	lbs	2624 / 2756	3252 / 3428	3880 / 4101
Net weight / gross weight mod. Folder front and rear exit	kg	1240 / 1300	1535 / 1615	1840 / 1940
	lbs	2734 / 2866	3384 / 3560	4057 / 4277
Net volume (with rear exit) / Gross volume	m³	6,50 (7,99) / 8,68	7,76 (9,53) / 10,26	9,22 (11,32) / 12,11
	f³	230 (282) / 307	274 (336,42) / 362	326 (399,9) 428
OTHERS				
No. Fume outlet	Nº	1	2	2
Ø Fume outlet	mm	153	153	153
	inch	6,0	6,0	6,0
Air flow	m³/h	600	1.200	1.200
	cfm	353	706	706
Noise Level	dB	65	65	65
Evaporation power standard mod.	l/h	37	45	62
	USgallon/h	9,7	11,9	16,4
Evaporation power mod. Folder front exit	l/h	26	32	43
	USgallon/h	6,8	8,3	11,5
Evaporation power mod. Folder front and rear exit	l/h	24	29	40
	USgallon/h	6,3	7,7	10,7

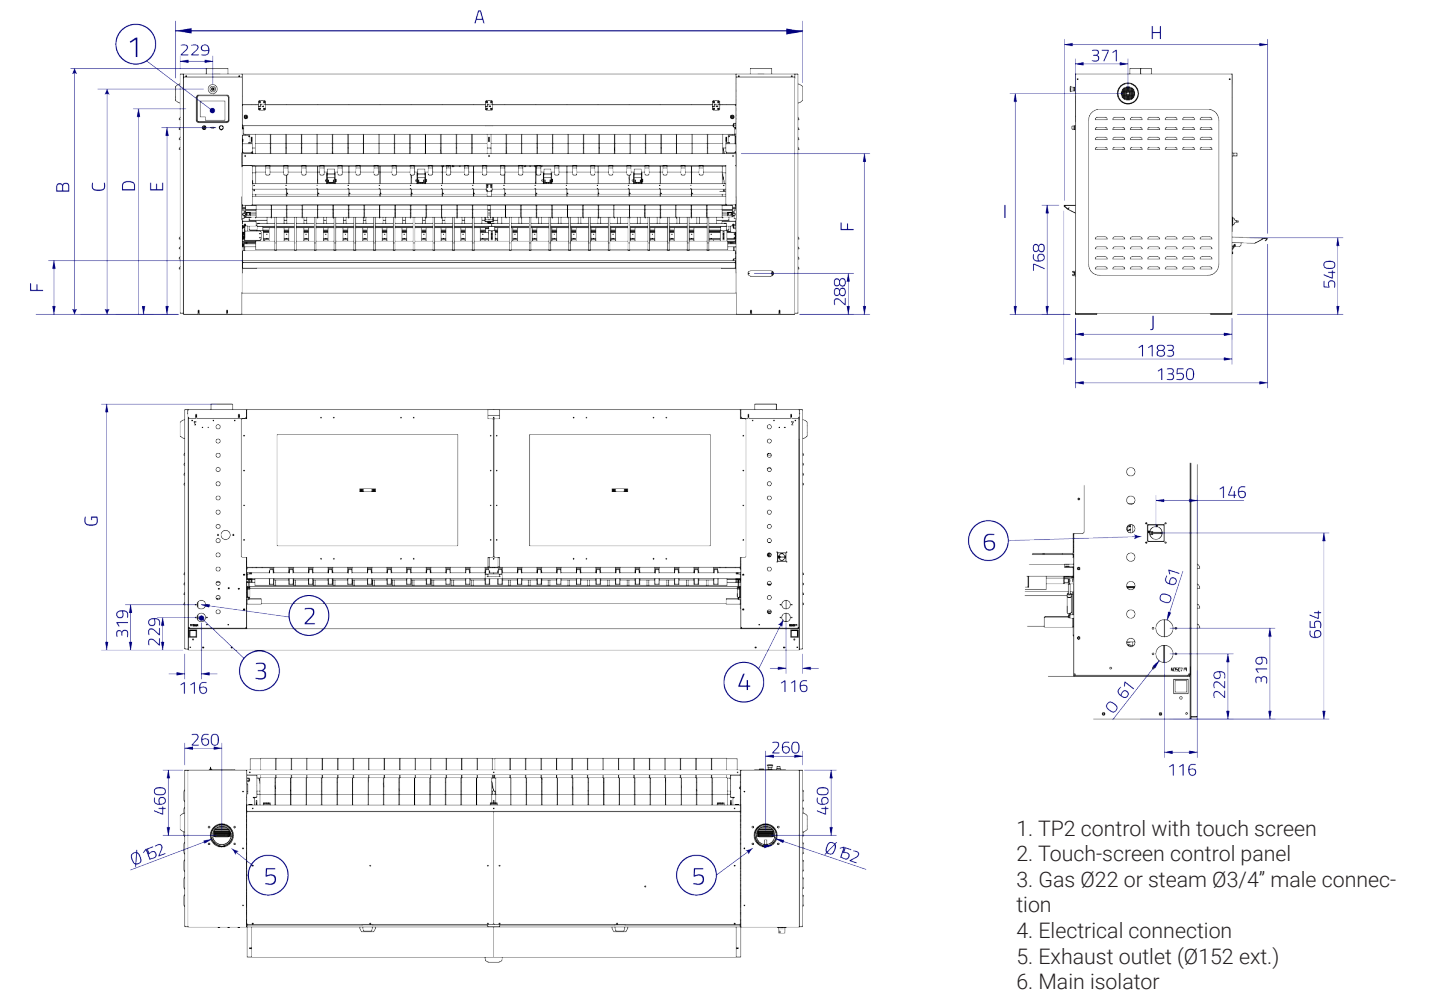

	A	B	C	D	E	F	G	H	I	J
PSP-50-200 TP2	3110	1729	1584	1445	1313	1130	1729	1428	1553	1101
PSP-50-260 TP2	3710	1729	1584	1445	1313	1130	1729	1428	1553	1101
PSP-50-330 TP2	4410	1729	1584	1445	1313	1130	1729	1428	1553	1101

This machine must be installed on a perfectly level floor.
This machine can be placed against a wall, but for ease of maintenance, it is best to leave a 1500mm space.



IRONING AND FOLDING

FLATWORK IRONERS ROLLER Ø 650 PSP-65-200/260/330 TP2

CHARACTERISTICS

TP2

- TP2 microprocessor, 7" touch screen, easy to use and fully programmable.
- USB connection. Free online platform for programming, telemetry, data analysis... thanks to IoT.
- 37 languages 5 preset programs.

EFFICIENCY

- Good heat conduction thanks to the material and thickness of the roll: greater control of energy consumption.
- Automatic switch-off at 80°C (adjustable parameter).
- Smoke circulation circuit at the bottom to reduce energy consumption.
- Model with radiant burner: 25% more productive.
- Automatic regulation of the ironing speed according to the residual humidity as standard.
- High production system, speed ironing up to 15m/min as standard (not compatible with folder).

VERSATILITY

- Radiant gas model: flexible, suitable for high altitude installations.
- Optional built-in longitudinal folder with or without rear exit option.

ROBUSTNESS

- Nomex quality ironing belts: resistant to high temperatures.
- Grey skinplate panels.
- Nickel-plated roller as an option: anti-corrosive, more durable.
- Reinforced mechanical structure.

ERGONOMICS

- Acoustic comfort : <65 dB
- Suitable working height: 1170 mm feed belts.
- Compact design to save space.

MAINTENANCE




- Easy access to all components on both sides of the machine.
- Connections : electrical connection and air extraction.
- Complete technical menu: statistics, self-test, data retrieval for technician and maintenance.

OTHERS

- Dries and irons flat linen from a high spin washer in a single operation.
- Front feed and return.
- Built-in cooling system.
- Polished steel roller Ø 650 mm.
- Working widths: 2000, 2600 and 3300 mm.
- Electric, radiant gas or steam heating. CE certified.

OPTIONS

- Nickel-plated roller (except steam model).
- Propane gas for radiant gas model.
- Natural gas for radiant gas model.
- Longitudinal folder (front outlet).
- Longitudinal folder (front and rear outlet).
- Standard rear outlet (model without folder).
- Antistatic ironing belts without folder.
- Antistatic ironing belts + folder bar.
- Cross folder.
- Hygienic tray to avoid contact between clothes and the floor.
- Wooden maritime packaging.

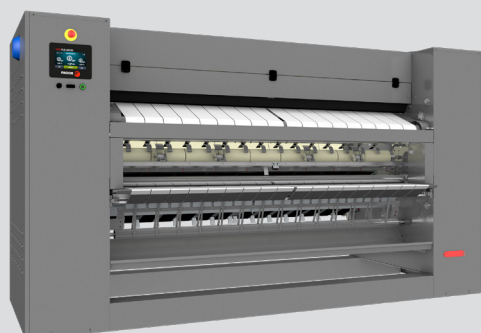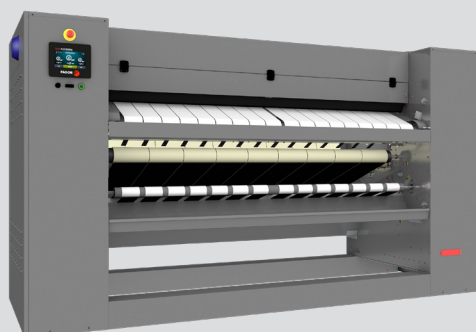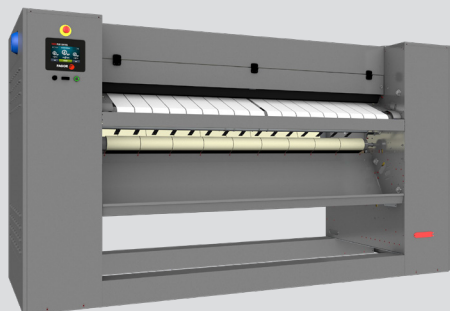


TECHNICAL DATA

FLATWORK IRONERS | ROLLER Ø 650 | PSP-65-200/260/330 TP2

		UNIT	PSP-50-200 TP2	PSP-50-260 TP2	PSP-50-330 TP2			
GENERAL DETAILS								
Theoretical output Electric, steam and atmo. gas heating* standard mod. front or rear exit		Kg/h	90	115	160			
		lb/h	198	254	353			
Theoretical output Electric, steam and atmo. gas heating* mod. Folder front exit		Kg/h	63	81	112			
		lb/h	139	177	247			
Theoretical output Electric, steam and atmo. Gas heating* mod. Folder front and rear exit		Kg/h	59	75	104			
		lb/h	129	165	229			
Theoretical production Radiant gas heating* mod stan- dard front or rear exit		Kg/h	N/A	N/A	N/A			
		lb/l	N/A	N/A	N/A			
Theoretical production Radiant gas heating* mod folder front exit		Kg/h	104	132	184			
		lb/l	229	291	406			
Theoretical production Radiant gas heating* mod folder front and rear exit		Kg/h	73	92	129			
		lb/l	160	204	264			
Roll Ø		mm	68	86	120			
		inch	149	189	264			
Working width		mm	650	650	650			
		inch	25,59	25,59	25,59			
Height floor-feeding belts		mm	2.000	2.600	3.300			
		inch	78,74	102,36	129,92			
Working speed standard mod.		m/min	1.170	1.170	1.170			
		ft/min	46,06	46,06	46,06			
Working speed mod. with folder		m/min	0,5 - 15	0,5 - 15	0,5 - 15			
		ft/min	1,6 - 49	1,6 - 49	1,6 - 49			
Electronic control		-	2 - 10	2 - 10	2 - 10			
No. Programs		-	6,5 - 32	6,5 - 32	6,5 - 32			
Lenght folder		-	TP2	TP2	TP2			
Rear exit		-	5	5	5			
Large surface contact with linen		-	OPC.	OPC.	OPC.			
POWER								
Roll motor power		Kw	0,61	0,61	0,61			
Fan motor power		Kw	0,5	0,5	0,5			
Electric	Heating power	Kw	42	54	72			
	Total electric power	Kw	43,11	55,11	73,11			
Gas	Heating power	Kw	52	69	78			
	Total electric power	Kw	1,11	1,11	1,11			
Steam	Heating power	Kw	60	76	97			
	Total electric power	Kw	1,11	1,11	1,11			
	Steam consuption	Kg/h	60	80	102			
Additional electric power standard mod. Rear exit		Kw	0,28	0,28	0,28			
Additional electric power mod with folder front exit		Kw	0,66	0,66	0,66			
Additional electric power mod with folder front and rear exit		Kw	0,76	0,76	0,76			
CONNECTIONS			ELECTRIC	STEAM/ GAS	ELECTRIC	STEAM/ GAS	ELECTRIC	STEAM/ GAS
Tension 230V - I + N + T		Nº x mm² / A	N/A	3 x 2,5 / 10A	N/A	3 x 2,5 / 10A	N/A	3 x 2,5 / 10A
		nº x AWG/A	N/A	3 x 13 / 10A	N/A	3 x 13 / 10A	N/A	3 x 13 / 10A
Tension 230V - III + T		Nº x mm² / A	4 x 25 / 125A	4 x 2,5 / 10A	4 x 35 / 160A	4 x 2,5 / 10A	N/A	4 x 2,5 / 10A
		nº x AWG/A	4 x 3 / 125A	4 x 13 / 10A	4 x 2 / 160A	4 x 13 / 10A	N/A	4 x 13 / 10A
Tension 400V - III + N + T		Nº x mm² / A	5 x 16 / 80A	5 x 2,5 / 10A	5 x 25 / 100A	5 x 2,5 / 10A	5 x 25 / 125A	5 x 2,5 / 10A
		nº x AWG/A	5 x 5 / 80A	5 x 13 / 10A	5 x 3 / 100A	5 x 13 / 10A	5 x 3 / 125A	5 x 13 / 10A
Ø Gas inlet		BSP	1/2"		1/2"		1/2"	
Ø Steam inlet		BSP	3/4"		3/4"		3/4"	
Ø Condensed (Steam models)		BSP	1/2"		1/2"		1/2"	
DIMENSIONS / DIMENSIONS WITH PACKAGING								
Net width / Gross width		mm	3110 / 3290		3710 / 3890		4410 / 4590	
		inch	122,4 / 129,5		146,1 / 153,1		173,6 / 180,7	
Net depth (with rear exit open) / gross depth		mm	1175 (1507) / 1360		1175 (1507) / 1360		1175 (1507) / 1360	
		inch	46,3 (59,3) / 53,5		46,3 (59,3) / 53,5		46,3 (59,3) / 53,5	
Net height / gross height		mm	1780 / 1940		1780 / 1940		1780 / 1940	
		inch	70,1 / 76,4		70,1 / 76,4		70,1 / 76,4	
Net weight / gross weight standard mod.		kg	1389 / 1449		1717 / 1797		1965 / 2065	
		lbs	3062 / 3194		3785 / 3962		4332 / 4553	
Net weight / gross weight standard mod. with rear exit		kg	1419 / 1479		1757 / 1837		2015 / 2115	
		lbs	3128 / 3261		3874 / 4050		4442 / 4663	

*45 % moisture

Net weight / gross weight moaad. Folder front exit	kg	1449 / 1509	1812 / 1892	2095 / 2195
	lbs	3194 / 3327	3995 / 4171	4619 / 4839
Net weight / gross weight mod. Folder front and rear exit	kg	1499 / 1559	1872 / 1952	2175 / 2275
	lbs	3305 / 3437	4127 / 4303	4795 / 5016
Net volume (with rear exit) / Gross volume	m³	6,50 (7,99) / 8,68	7,76 (9,53) / 10,26	9,22 (11,32) / 12,11
	f³	230 (282) / 307	274 (336,42) / 362	326 (399,9) 428
OTHERS				
No. Fume outlet	Nº	2	2	2
Ø Fume outlet	mm	153	153	153
	inch	6,0	6,0	6,0
Air flow	m³/h	1.200	1.200	1.200
	cfm	706	706	706
Noise Level	dB	65	65	65
Evaporation power standard mod.	l/h	47	59	83
	USgallon/h	12,4	15,7	21,9
Evaporation power mod. Folder front exit	l/h	33	42	58
	USgallon/h	8,7	11	15,3
Evaporation power mod. Folder front and rear exit	l/h	30	39	54
	USgallon/h	8	10,2	14,2

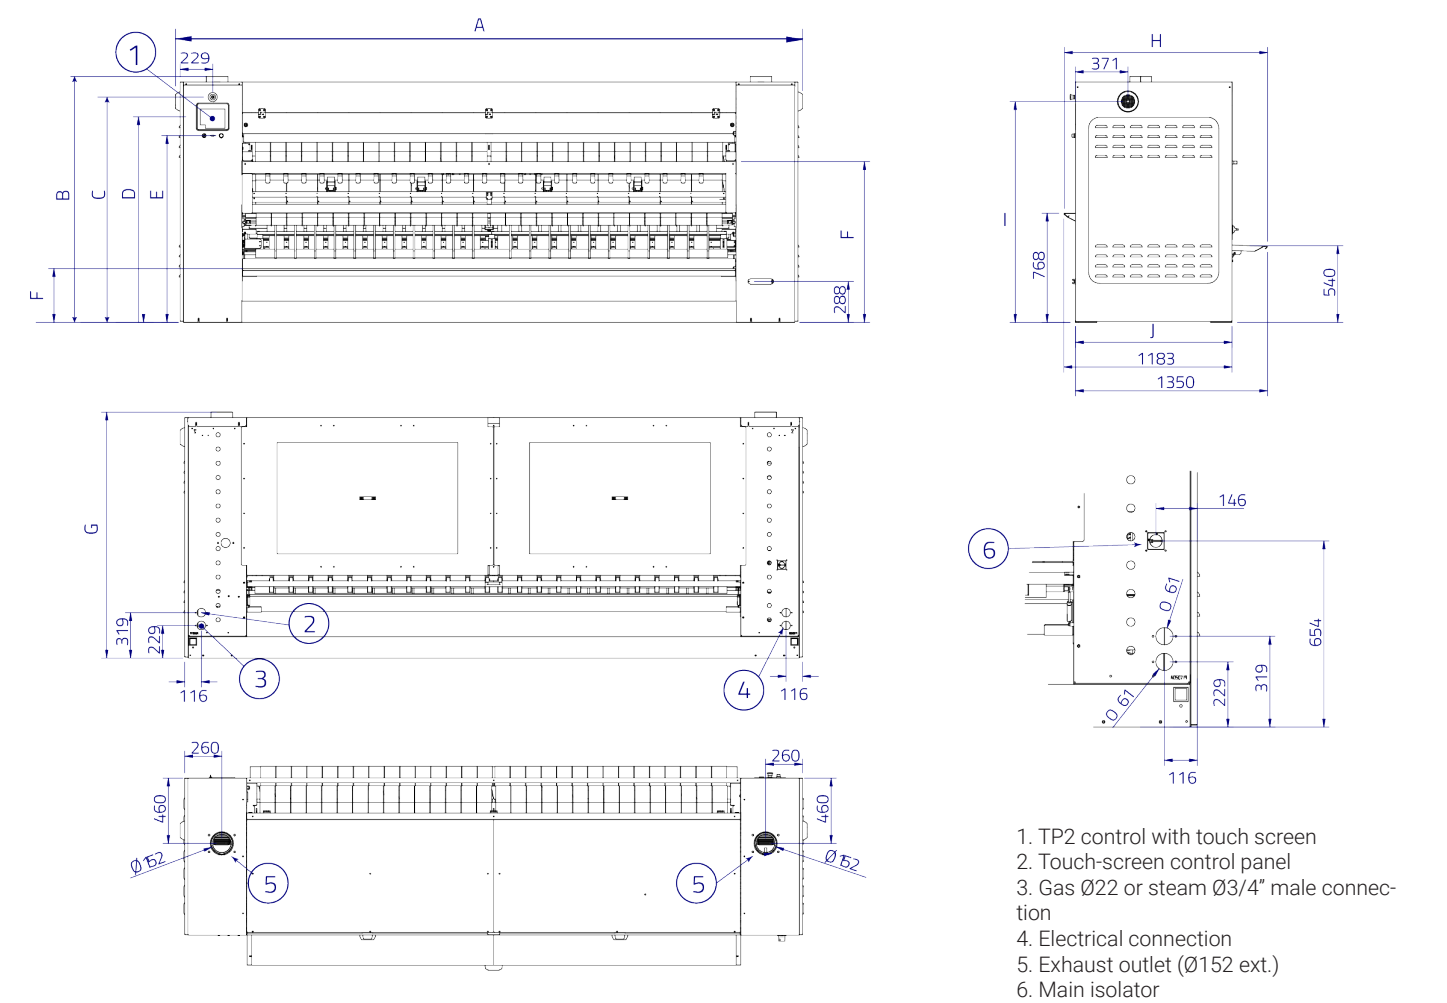

	A	B	C	D	E	F	G	H	I	J
PSP-65-200 TP2	3110	1729	1584	1445	1313	1130	1729	1428	1553	1101
PSP-65-260 TP2	3710	1729	1584	1445	1313	1130	1729	1428	1553	1101
PSP-65-330 TP2	4410	1729	1584	1445	1313	1130	1729	1428	1553	1101

This machine must be installed on a perfectly level floor.
This machine can be placed against a wall, but for ease of maintenance, it is best to leave a 1500mm space.