



FINISHING

FORM FINISHERS FOR COATS, JACKETS AND DRESSES MAN / MAN-C

CHARACTERISTICS

- The working cycle is completely automatic and the steaming and drying duration is adjustable by three timers.
- The shoulder width and the bag are adjustable.
- The support of the bag (frame) with its controls rotates to 360°.

MAN-C

- Complete with built-in steam boiler, 18 litres.
- Electrical connection: 230/400V III 50Hz
- Automatic water feeding.
- Automatic pressure control (4,5 bar).

MAN


- Without steam boiler, to be connected to a central steam supply.
- It needs a steam inlet and outlet.
- Electrical connection: 230/400V III 50Hz



TECHNICAL DATA

FORM FINISHERS FOR COATS, JACKETS AND DRESSES | MAN / MAN-C

| | UNIT. | MAN-C | MAN |
|--|----------------|-------------------|-------------------|
| GENERAL DETAILS | | | |
| Boiler | - | YES | NO |
| Boiler capacity | L | - | - |
| Group of iron | - | - | - |
| Steam gun | - | OPT | - |
| POWER | | | |
| Pump motor | HP | 0,8 | - |
| Boiler heater | kW | 12 | - |
| Fan motor | kW | 1 | 1 |
| CONNECTIONS | | | |
| Ø Water inlet | BSP | 3/8" | - |
| Ø Boiler exhaust (mod. with boiler) | BSP | 1/2" | - |
| Ø Steam inlet | BSP | - | 3/8" |
| Ø Condensate outlet | BSP | - | 3/8" |
| Steam pressure | bar | 4,5 | 4,5 |
| Steam consumption | Kg/h | 10-15 | 10-15 |
| Ø Air inlet | BSP | - | - |
| Ø Air outlet | mm | - | - |
| Air pressure | bar | - | - |
| Air Consumption | NI/min | - | - |
| DIMENSIONS / PACKING DIMENSIONS | | | |
| Net width / Gross width | mm | 1.360 / 1.390 | 1.200 / 1.390 |
| Net depth / Gross depth | mm | 610 / 640 | 580 / 640 |
| Net height / Gross height | mm | 1.780 / 1.910 | 1.620 / 1.910 |
| Net weight / Gross weight | kg | 130 / 151 | 88 / 109 |
| Volume | m ³ | 1,48 / 1,70 | 1,13 / 1,70 |
| OTHERS | | | |
| Voltage | V | 230/400V 3~ 50-60 | 230/400V 3~ 50-60 |
| Sound level | dB | 70 | 70 |

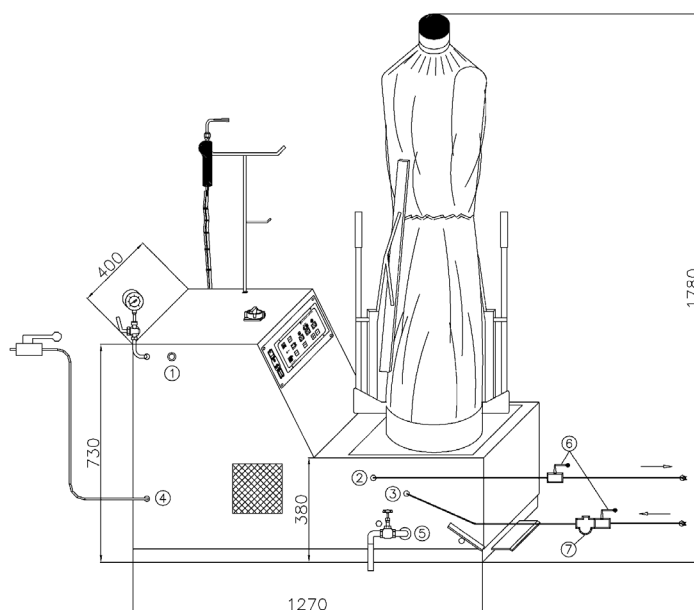

- 01. Inlet electrical power
- 02. Condensate purge
- 03. Steam inlet



FINISHING

FORM FINISHERS FOR JACKETS AND SLEEVED GARMENTS MAN-COAT

CHARACTERISTICS


- Working cycle by electronic card with 9 stored finishing programs.
- Telescopic shape till 1500 mm.
- Special 350° revolving body form plus automatic front & rear paddle clamps.
- Sensor for the automatic research of the height of the garment.
- Double antistretching system in large (waist) and in height (length).
- Mechanical adjustable shoulder group and dedicated collar clamp.
- Damper for air-volume regulation.
- For central steam & compressed air supply line.
- It can be installed with the steam generator MAXI-24-22.



TECHNICAL DATA

FORM FINISHERS FOR JACKETS AND SLEEVED GARMENTS | MAN-COAT

| | UNIT. | MAN COAT |
|--|----------------|--------------------|
| GENERAL DETAILS | | |
| Boiler | - | NO |
| Boiler capacity | l | - |
| Steam iron assembly | - | OPT |
| Steam gun | - | - |
| POWER | | |
| Pump Motor | HP | - |
| Boiler Heater (Mod. with option) | kW | - |
| Fan motor | kW | 1,2 |
| CONNECTIONS | | |
| Ø Water inlet | BSP | - |
| Ø Boiler exhaust (mod. with boiler) | BSP | - |
| Ø Steam inlet | BSP | 1/2" |
| Ø Condensate outlet | BSP | 1/2" |
| Steam pressure | BAR | 5 |
| Steam Consumption | Kg/h | 15-20 |
| Ø Air inlet | BSP | 1/4" |
| Ø Air outlet | BSP | 1/4" |
| Air pressure | BAR | 6 |
| Air Consumption | NI/m | 8 |
| DIMENSIONS / PACKING DIMENSIONS | | |
| Width / Width | mm | 690 / 800 |
| Depth / Depth | mm | 950 / 1.050 |
| Height / Height | mm | 1550 -2250 / 1.850 |
| Net weight / Gross weight | kg | 160 / 180 |
| Volume | m ³ | 1,04-1,88 / 1,55 |
| OTHERS | | |
| Voltage | V | 230/400V 3~ 50-60 |
| Sound level | dB | 70 |

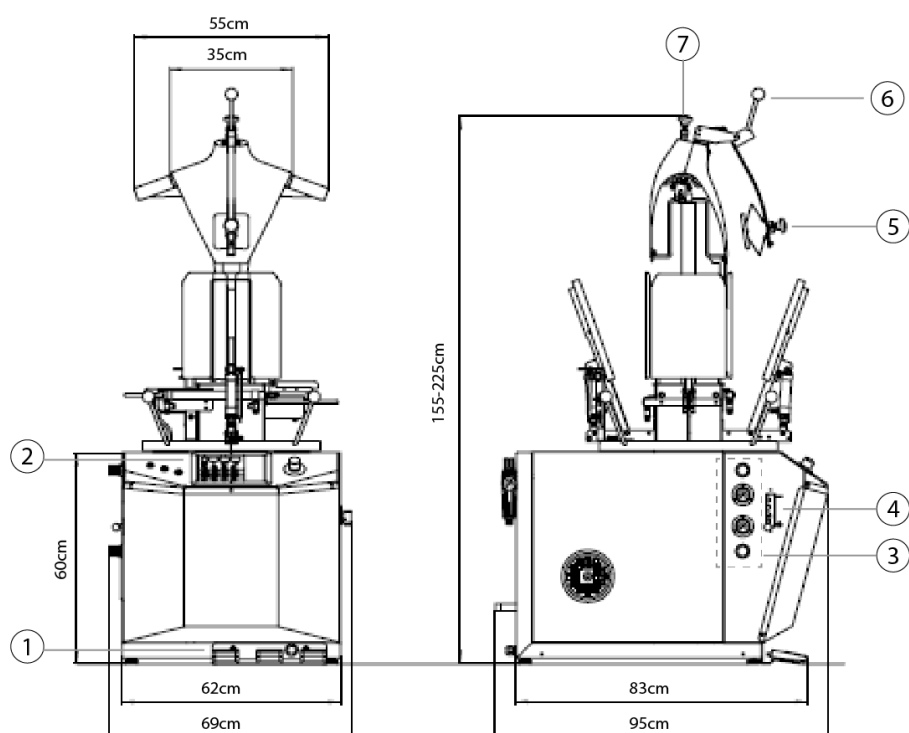




FINISHING

FORM FINISHERS FOR JACKETS AND SLEEVED GARMENTS MAN-SHIRT

CHARACTERISTICS


- To be connected to a central steam supply.
- Two sleeve stretchers with double independent traction.
- Front heated and reclining panel.
- Automatic carriage with photocell for the stretching of side and back part.
- Powerful 3 HP fan.
- Button placket part of the dummy with suction.
- Electronic card featuring ten programs for an automatic working cycle.
- Steam iron connection complete with «all-steam»-iron.
- Air superheater ranging from 0° to 350° C.
- Electronic card for the setting of 9 ironing cycles in total.
- It needs compressed air.
- Air working pressure: 5-6 bar.
- Air consumption: 20 NI/min.
- Electric connection: 400V III +N.

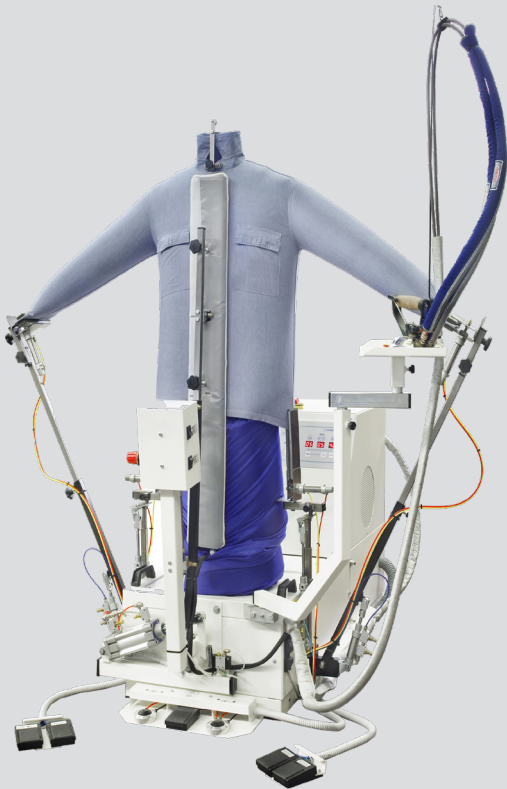

TECHNICAL DATA

FORM FINISHERS FOR SHIRTS AND JACKETS | MAN-SHIRT

| | UNIT. | MAN SHIRT |
|--|----------------|----------------|
| GENERAL DETAILS | | |
| Boiler | - | NO |
| Boiler capacity | l | - |
| Steam iron assembly | - | OPT |
| Steam gun | - | - |
| POWER | | |
| Pump Motor | HP | - |
| Boiler Heater (Mod. with option) | kW | - |
| Fan motor | kW | 3 |
| CONNECTIONS | | |
| Ø Water inlet | BSP | - |
| Ø Boiler exhaust (mod. with boiler) | BSP | - |
| Ø Steam inlet | BSP | 1/2" |
| Ø Condensate outlet | BSP | 1/2" |
| Steam pressure | BAR | 4-8 |
| Steam Consumption | Kg/h | 20-30 |
| Ø Air inlet | BSP | 1/4" |
| Ø Air outlet | BSP | 1/4" |
| Air pressure | BAR | 6 |
| Air Consumption | NI/m | 20 |
| DIMENSIONS / PACKING DIMENSIONS | | |
| Width / Width | mm | 1.900/1.940 |
| Depth / Depth | mm | 1.600/1.190 |
| Height / Height | mm | 1.850/1.850 |
| Net weight / Gross weight | kg | 189/276 |
| Volume | m ³ | 5,62/4,27 |
| OTHERS | | |
| Voltage | V | 400V III 50/60 |
| Sound level | dB | 70 |

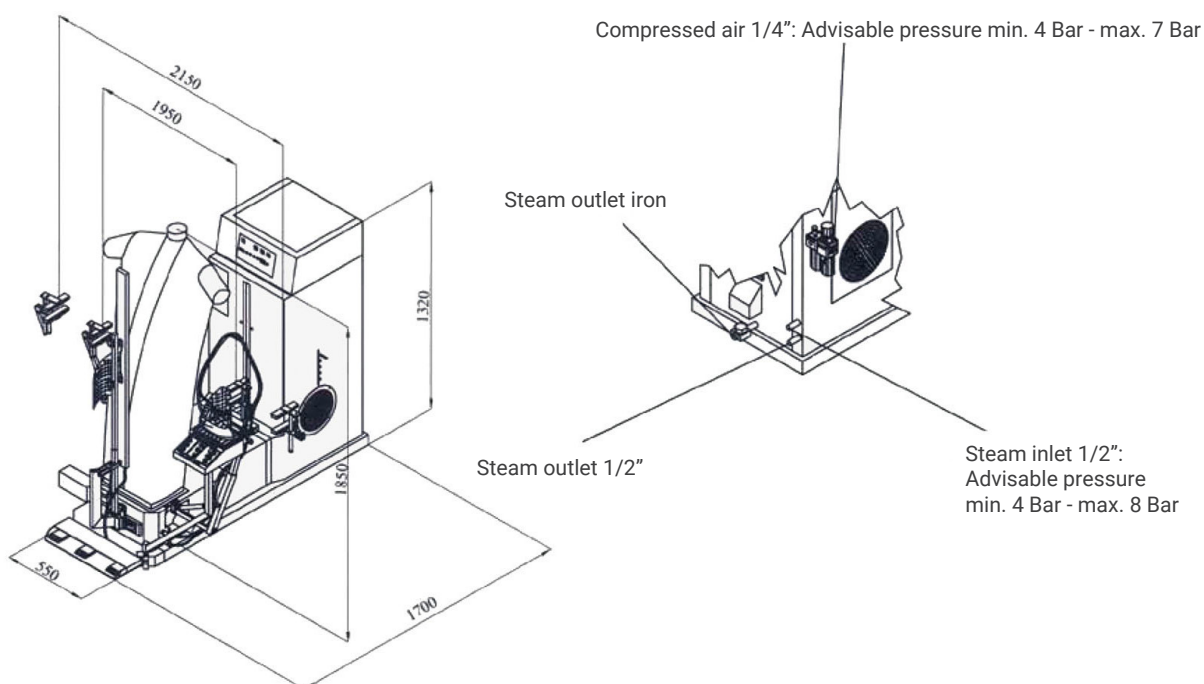



FINISHING

FINISHING TOPPER FOR TROUSERS TOPPER / TOPPER-C

CHARACTERISTICS


- 2 MODELS
 - Without boiler
 - With boiler (TOPPER-C)
- With air-operated waistband and leg stretching device, for central steam and compressed air supplies.
- Side waistband stretching device.
- Height adjustable leg stretching carriage and leg clamps made of stainless steel.
- Built-in three phases fan. Air heating device.
- Electronic card for the setting of 9 ironing cycles in total.
- Ironing cycle controlling: steaming time, steam/air time, drying time.
- Three pressure regulators (for leg clamps, waistband stretcher and leg stretching carriage).
- Switch for the exclusion of the leg stretching carriage.
- Manual size indicator.
- Mechanical airflow regulator.
- It needs compressed air, 5 bar - 40 NI/min.
- Connection: 230/400V III 50Hz



TECHNICAL DATA

FINISHING TOPPER FOR TROUSERS | TOPPER / TOPPER-C

| | UNIT. | TOPPER | TOPPER-C |
|--|----------------|-------------------|-------------------|
| GENERAL DETAILS | | | |
| Boiler | - | NO | YES |
| Boiler capacity | L | - | 5 |
| Group of iron | - | - | - |
| Steam gun | - | - | - |
| POWER | | | |
| Pump motor | HP | - | - |
| Boiler heater | kW | - | 6 |
| Fan motor | kW | 1-1,5 | 1-1,5 |
| CONNECTIONS | | | |
| Ø Water inlet | BSP | - | - |
| Ø Boiler exhaust (mod. with boiler) | BSP | - | - |
| Ø Steam inlet | BSP | 3/8" | - |
| Ø Condensate outlet | BSP | 3/8" | - |
| Steam pressure | bar | 5 | 5 |
| Steam consumption | Kg/h | 15-20 | - |
| Ø Air inlet | BSP | 1/4" | 1/4" |
| Ø Air outlet | mm | - | - |
| Air pressure | bar | 5 | 5 |
| Air Consumption | NI/min | 40 | 40 |
| DIMENSIONS / PACKING DIMENSIONS | | | |
| Net width / Gross width | mm | 1.115 / 1.210 | 1.115 / 1.210 |
| Net depth / Gross depth | mm | 630 / 780 | 630 / 780 |
| Net height / Gross height | mm | 1.950 / 2.100 | 1.950 / 2.100 |
| Net weight / Gross weight | kg | 119 / 175 | 165 / 225 |
| Volume | m ³ | 1,37 / 1,98 | 1,37 / 1,98 |
| OTHERS | | | |
| Voltage | V | 230/400V 3~ 50-60 | 230/400V 3~ 50-60 |
| Sound level | dB | 70 | 70 |

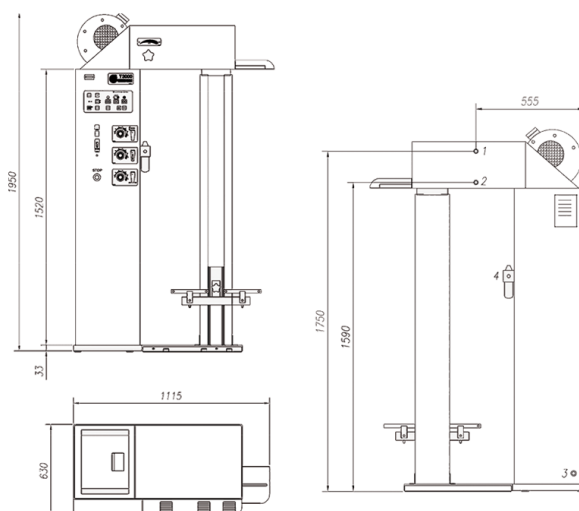

- 01. Steam inlet
- 02. Condensate purge
- 03. Inlet electrical power
- 04. Compressed air inlet